


Modell Model Type
PBS 500
PL09-BS-A

Max. Hubkraft: Max. lifting capacity: Capacite maxi de levage:	500 kg (1102 lbs)
Max. Betriebsdruck: Operating pressure: Pression d' utilisation:	12.5 MPa (125 bar) (1813 psi)
Max. Hubhöhe: Max. height of lift: Max. hauteur de levage:	1200 mm (47.24")
Lastschwerpunkt: Load center: Centre de gravite de la charge / mm du talon:	800 mm (31.50")
Hubgeschwindigkeit: Stroke speed: Vitesse de levage:	0.1 m/s 0.33'/s
Senkgeschwindigkeit: Lowering speed: Vitesse de descente:	0.1 m/s 0.33'/s
Öffnungs- Schließzeit: Opening, closing time: Temps d'ouverture, temps de fermeture:	6s
Öffnungs- Schließwinkel: Beam angle, dwell-angle: Angle d'ouverture, angle de fermeture:	-10° – 90°
Kippzeit: Toggle time: Vitesse de d'inclinaison:	3 – 4s
Kippwinkel: Tilt angle: Angle d'inclinaison:	-10°
Batteriekapazität: Battery capacity: Capacite de la batterie:	12V 1x110Ah 24V 2x66Ah
Batteriespannung: Battery voltage: Tension de la batterie:	12V 24V
Gewicht: Weight: Poids:	ALU 1500x2160 274 kg (604lbs)



Konstruktionsänderungen vorbehalten, fertigungs-techn. Toleranzen müssen berücksichtigt werden.
 Subject to change, production tolerances have to be taken into account.
 Sous réserve de modifications de conception. Les tolérances relatives à la technique de production doivent être prises en compte.

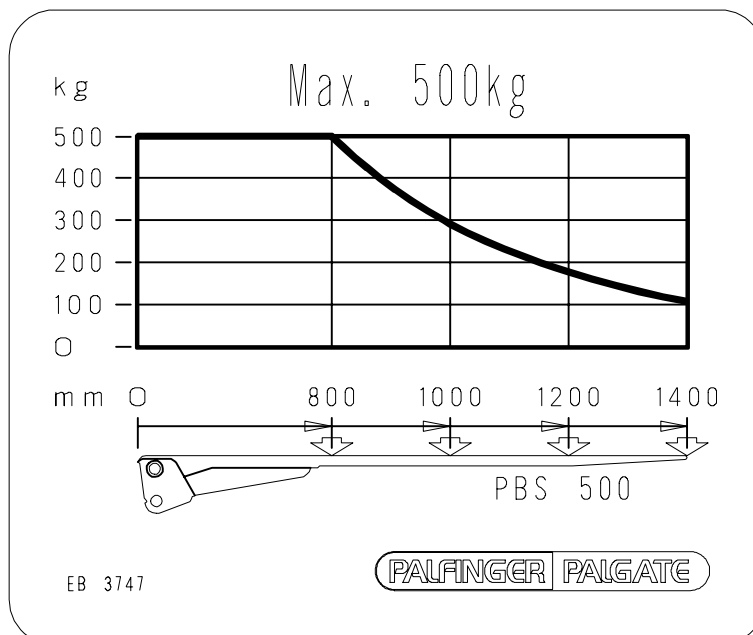

Modell Model Type
PBS 500
PL09-BS-A

Konstruktionsänderungen vorbehalten, fertigungstechn. Toleranzen müssen berücksichtigt werden.
 Subject to change, production tolerances have to be taken into account.
 Sous réserve de modifications de conception. Les tolérances relatives à la technique de production doivent être prises en considération.

Version: MB-Sprinter
VW-LT

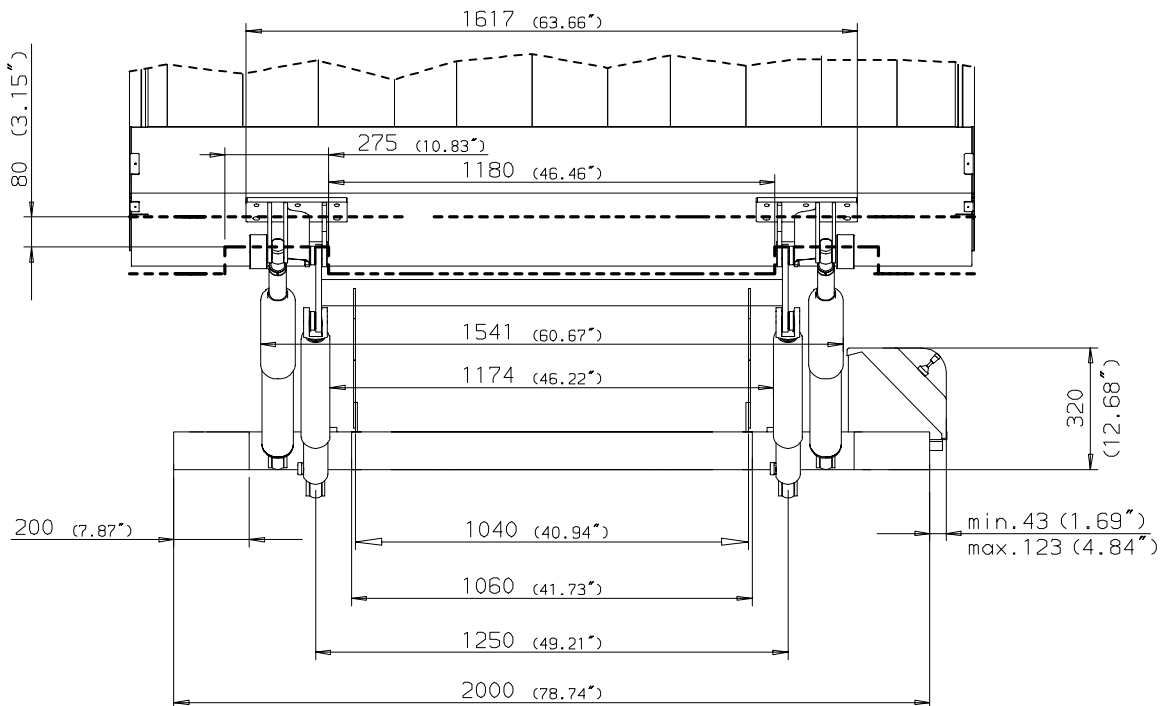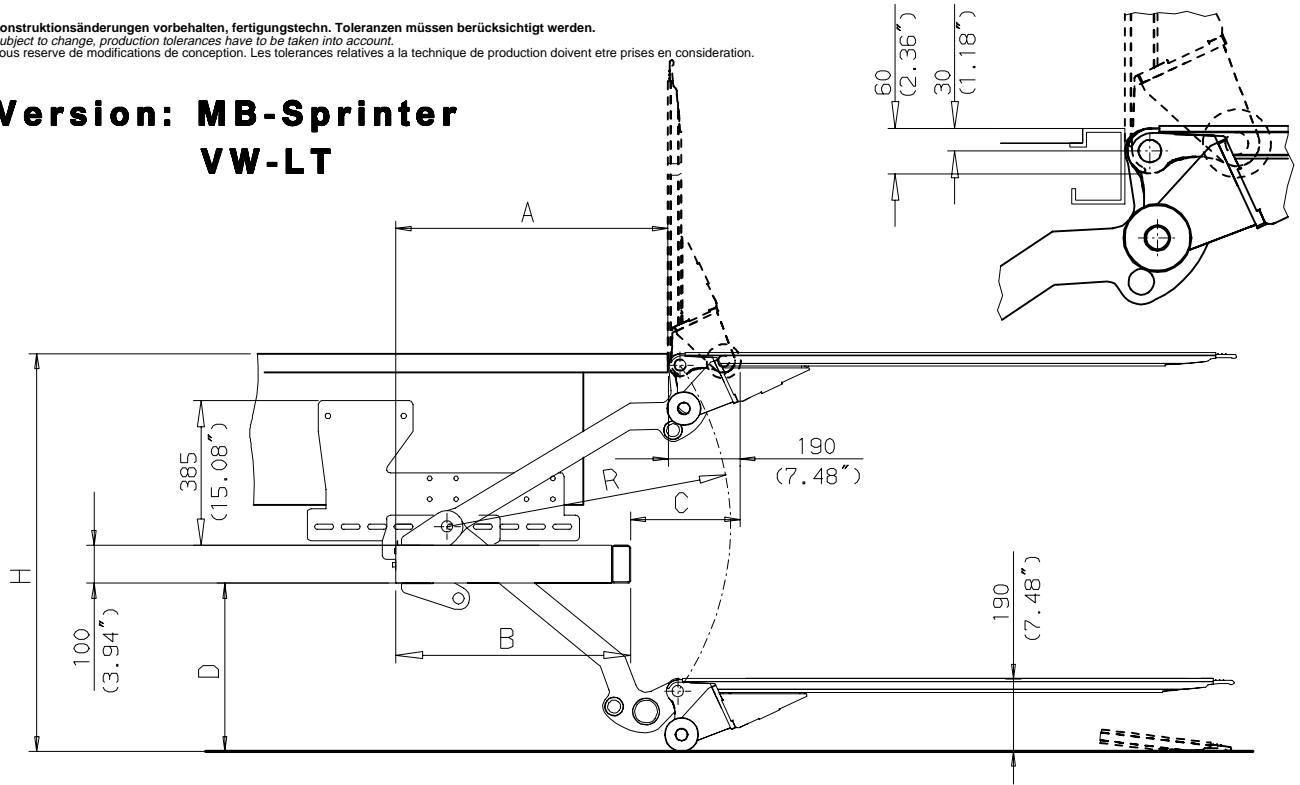

H	R	A	B	C	D
900mm (35.43")	750mm (29.53")	808mm (31.81")	650mm (25.59")	350mm (13.78")	390mm (15.35")
1000mm (39.37")	750mm (29.53")	756mm (29.76")	650mm (25.59")	296mm (11.65")	400mm (15.75")
1100mm (43.31")	750mm (29.53")	698mm (27.48")	650mm (25.59")	238mm (9.37")	425mm (16.73")
1200mm (47.24")	750mm (29.53")	611mm (24.06")	650mm (25.59")	152mm (5.98")	450mm (17.72")