


PK 25001 EL PERFORMANCE

**BUILDING CRANE WITH
HIGH OUTREACH AND
OPTIMISED SLEWING
RANGE**


LIFETIME EXCELLENCE

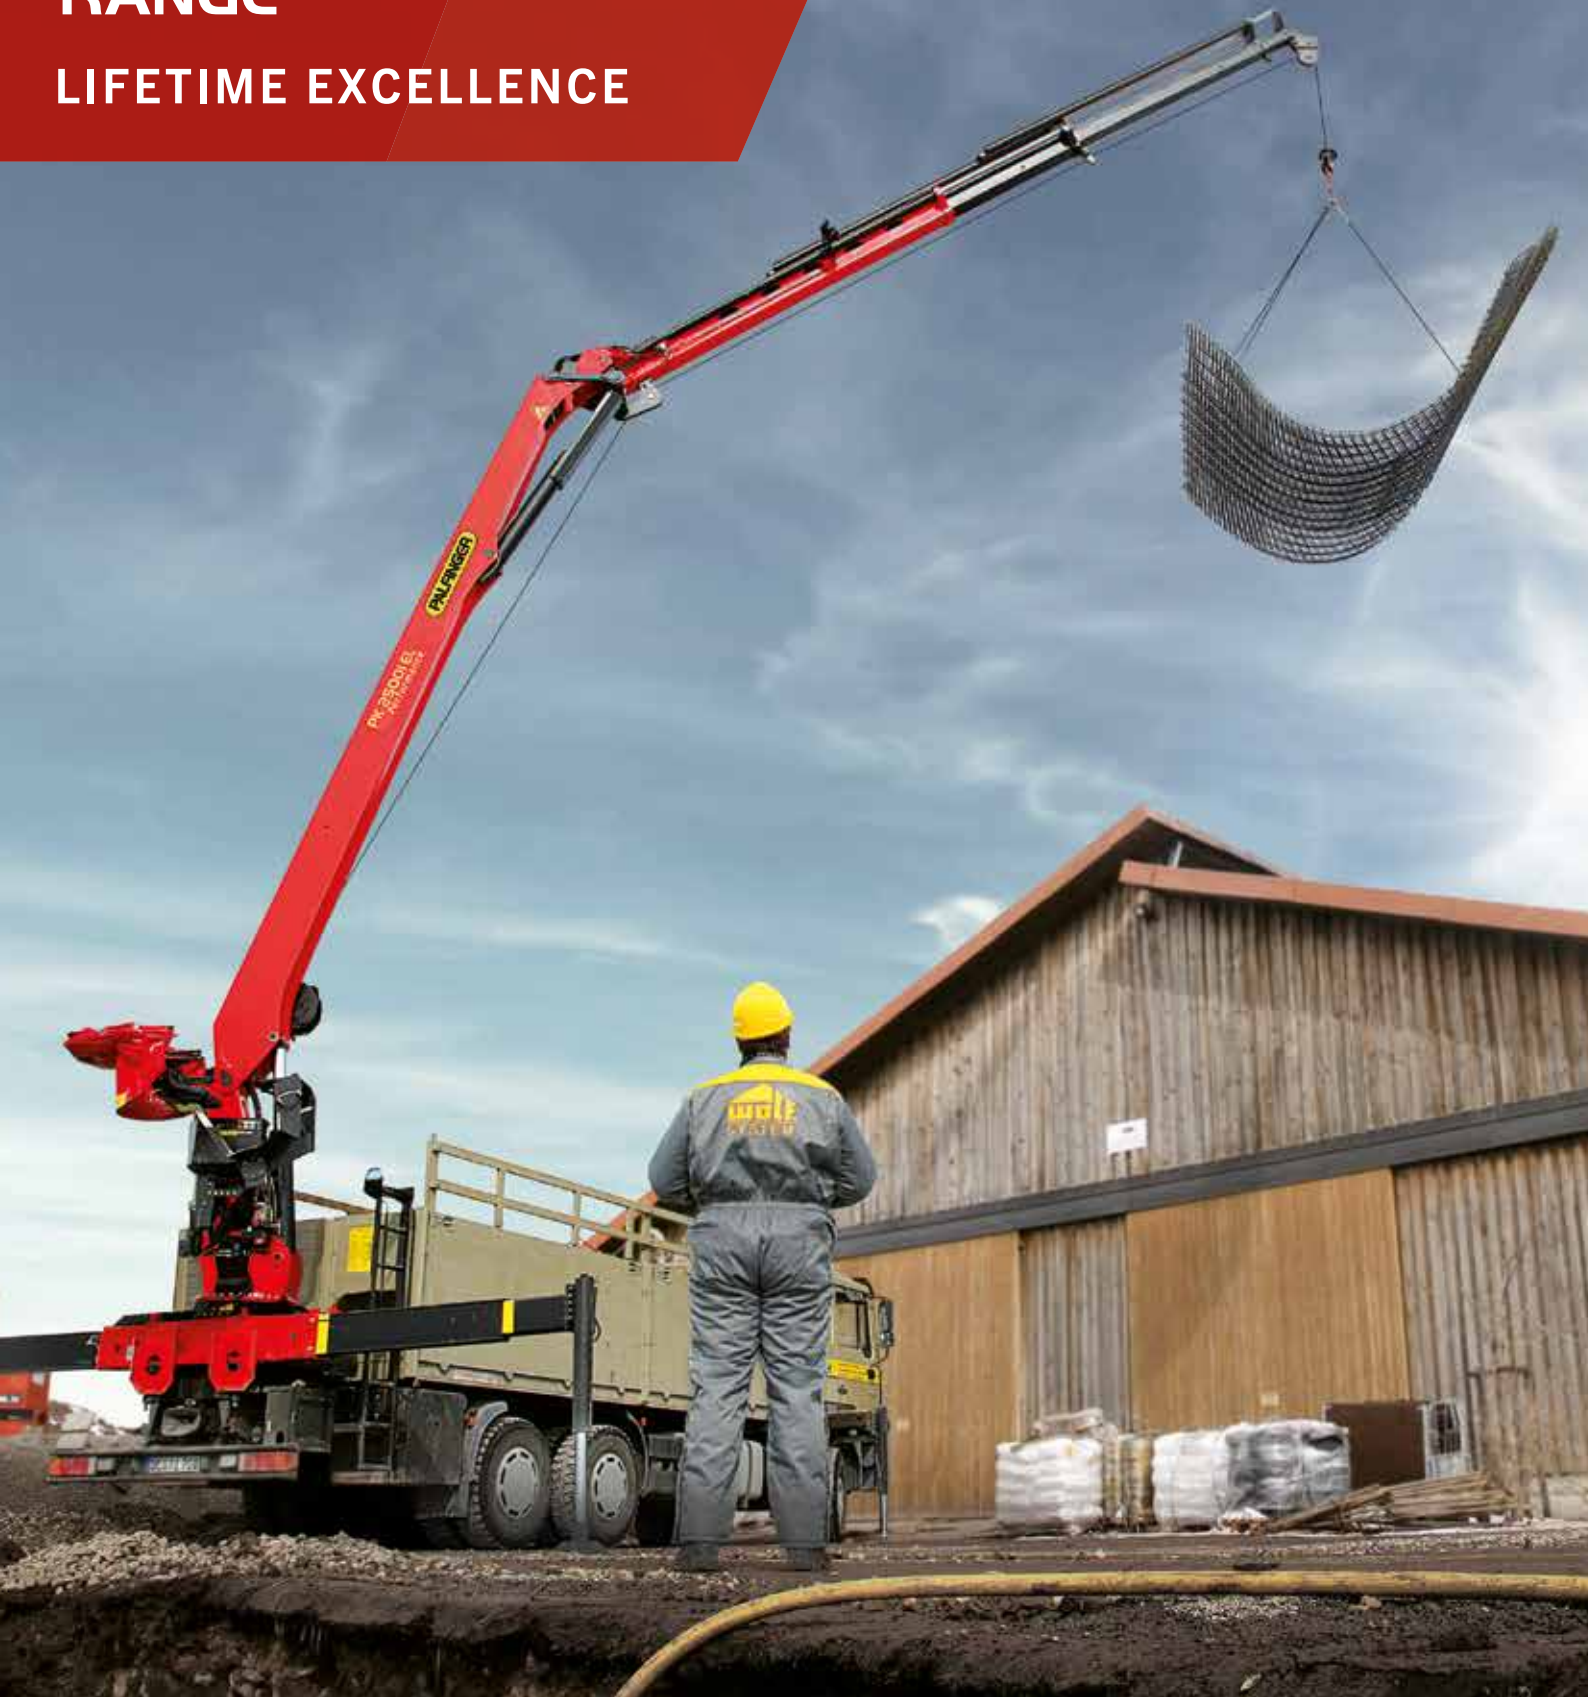


PK 25001 EL

GREAT OUTREACH


PK 25001 EL Performance A

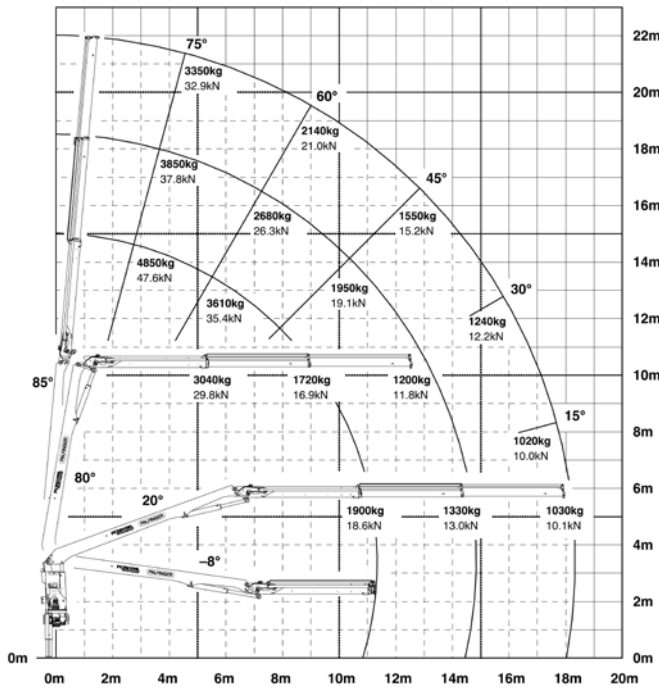

PK 25001 EL Performance C

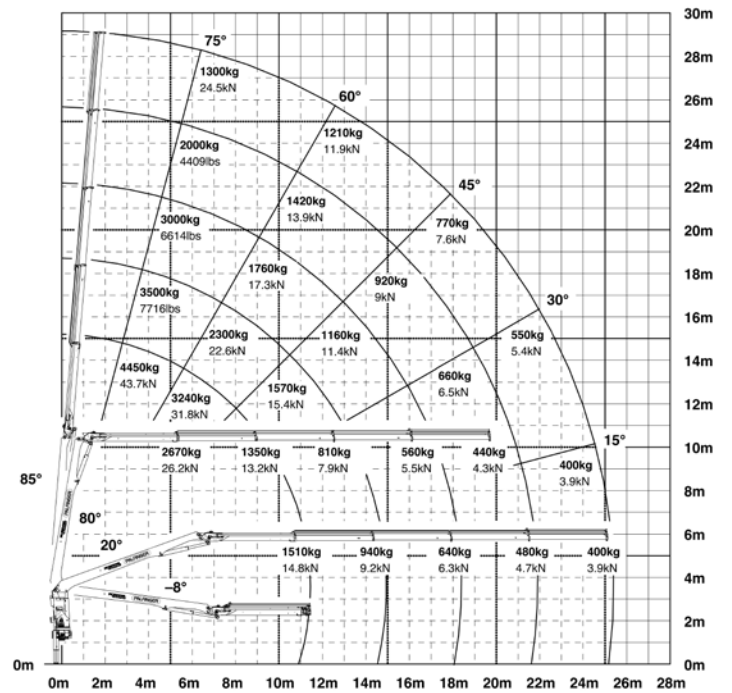

DIMENSIONS

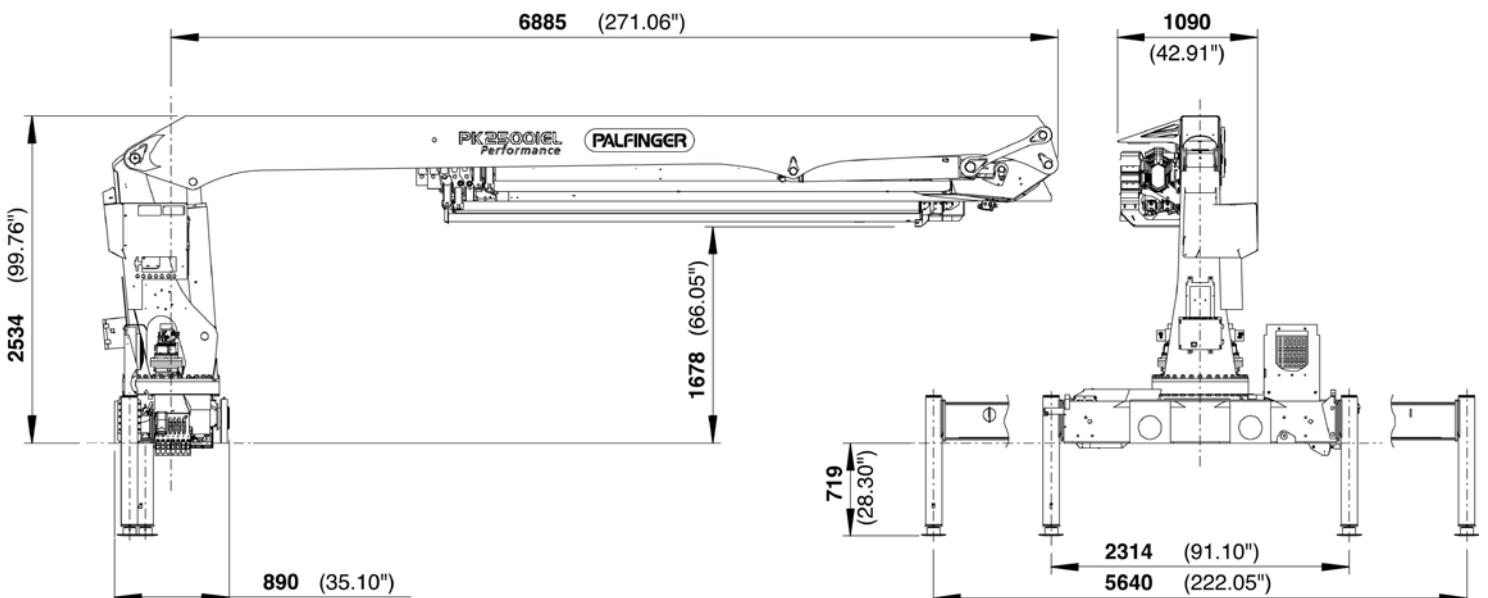

The PK 25001 EL Performance has been specially designed to overcome the challenges faced in the roofing and tiling business. For these businesses, this crane simply fits the bill exactly. It has not only a great outreach, but also a tremendous working speed – thus making it the ideal building crane.

Technical specifications

EN 12999 H1-B3

Max. lifting moment	23.4 mt/230.0 kNm	169580 ft.lbs
Max. lifting capacity	4850 kg/47,6 kN	10690 lbs
Max. hydraulic outreach	25.5 m	83' 8"
Max. mechanical outreach	32.5 m	106' 8"
Slewing angle	endless	
Slewing torque 1 gear	3.3 mt/32.0 kNm	23590 ft.lbs
Slewing torque 2 gear	4.1 mt/40.2 kNm	29640 ft.lbs
Outreach	18.3 m	60' 2"
Max. operating pressure	330 bar	4785 psi
Recommended pump capacity RC, LC-system	from 70 l/min to 90 l/min	18.5 US gal./min 23.8 US gal./min
Dead weight standard crane	3298 kg	7270 lbs

KP-PK25001ELL2+EN

Applications shown in the leaflet do not correspond to the standard specifications. Design and specification are subject to change without prior notice. Country-specific regulations must be considered for the crane installation. We reserve the right to change design and specification without prior notice.