

**PALFINGER**

**MBB Control**

# THE PERFECT CONTROL FOR TAIL LIFTS

**LIFETIME EXCELLENCE**



# MBB CONTROL

## MBB CONTROL ECO


- Automatic horizontal positioning sensors B13 / B16
- Adjustable time between lowering and adjustment to the ground
- Comparable to the previous K1-plus

## MBB CONTROL PLUS

- Angle of inclination-memory-function sensors B13 / B15
- Ground detection by angle scan 2x sensor B15 (optional)
- Comparable to the previous K-plus

## MBB CONTROL PREMIUM

- "Premium" for bespoke solutions
- Equipped as standard with 2x tilt angle sensors B15
- Connection with various control modules

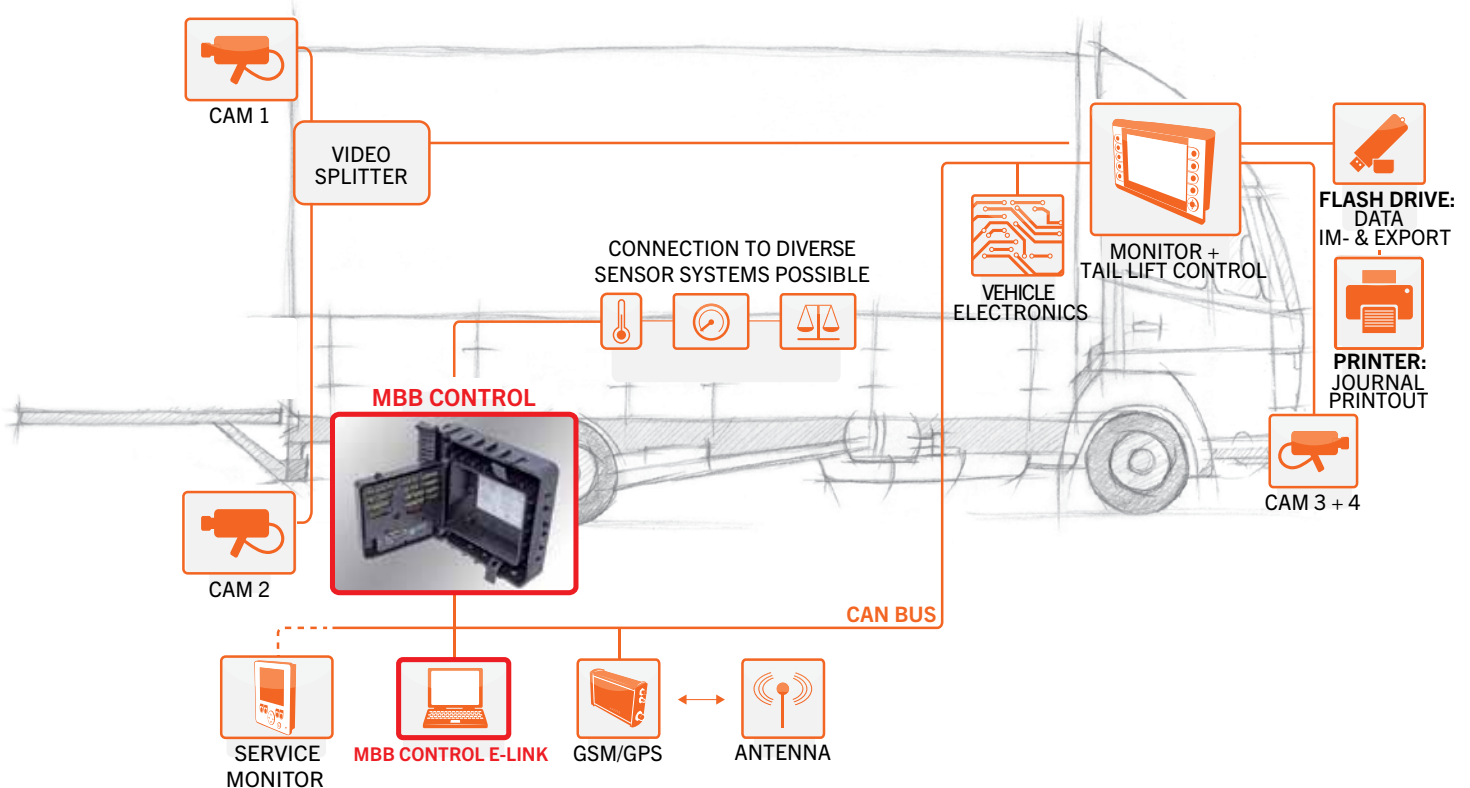

## THE IMPROVEMENTS OF THE NEW MBB CONTROL

- LED seven-segment error display on the control board
- Status indicator (LED red-green)
- Protected against incorrect connection and vibration
- Protective circuit fuse with low voltage protection
- Dual voltage board (9 V and 31 V)
- Powered opening of the platform\*
- Rear body light connection suitable as standard
- Compatible to the K-Plus control
- New diagnostic MBB CONTROL E-LINK
- Universal interface „CAN open / J1939“

**PALFINGER Tail Lifts GmbH**  
 Fockestraße 53, 27777 Ganderkesee, Deutschland  
[www.palfinger.com](http://www.palfinger.com)

