

# ETO 55 MHE

## INSULATED MATERIAL HANDLING



### POWERFUL DESIGN


The ETO55E is an insulated, overcenter material handler that offers competitive features for a unit of its class. With a working height of nearly 60 feet, this unit offers unique features such as a new generation leveling system and bucket access design in the non-overcenter position giving the end-user the benefit of thoughtful, customer-focused engineering. This model also offers powerful material handling capabilities with a hydraulic winch and a 5' jib that can lift up to 2,000 lbs.



DEPEND ON IT.™



# ETO MH 55 IHE

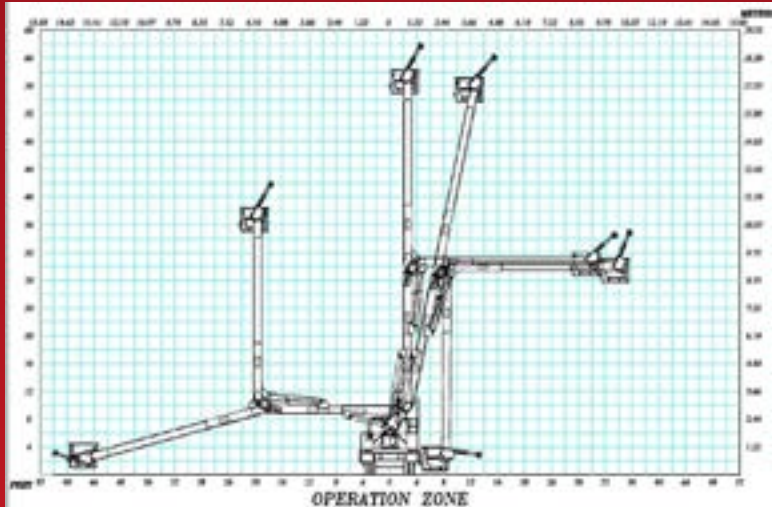

**EQUIPMENT TECHNOLOGY LLC IS A FULL SERVICE SOLUTION PROVIDER OF THE HIGHEST QUALITY DESIGN, MANUFACTURING, AND POST SALE SERVICE.**

## EQUIPMENT TECHNOLOGY LLC

341 NW 122nd  
 Oklahoma City, OK 73114  
 Toll-Free: 1-888-748-3841 • Fax: 1-405-755-6829  
[etiequipment.com](http://etiequipment.com)

### GENERAL SPECIFICATIONS\*

Height to bottom of bucket.....	54ft.-8in.
Working height.....	59ft.-8in.
Sidereach, Overcenter.....	48ft.-11in.
Side reach, Non Overcenter .....	43 ft. - 6 in.
Rotation.....	Continuous
Lower boom articulation .....	120 degrees
Upper boom travel.....	203 degrees
Stow height.....	11ft.-2in.
Rated bucket capacity.....	upto 800lbs.

### MINIMUM VEHICLE SPECIFICATIONS

GVWR (with dual rear wheels).....	33,000lbs.
GAWR (front).....	14,000lbs.
GAWR (rear).....	19,000lbs.
C.A.....	120in.

### STANDARD FEATURES

- Continuous rotation is standard on all ETO MH units.
- Full pressure hydraulic controls located at basket and turret with full feathering capabilities from both upper and lower controls.
- Shear ball rotation with an extended shaft for manual rotation.
- Internally mounted holding valves (integral part of cylinder) lock cylinders in place in the event of hydraulic failure.
- All pins turn on replaceable bushings.
- 90 degrees bucket rotator.
- Single handle upper control.
- Lower boom fiberglass insert.
- Hydraulic winch and 5 ft. jib - up to 2,000 lbs. material handling capacity.
- 24" x 30" or 24" x 48" basket.
- 2 sets of outriggers.
- up to 800 lbs. bucket capacity.

### OPTIONS

- Emergency hydraulic power (12VDC)
- Engine start/stop at bucket
- Single or Dual Hydraulic tool circuit
- 69 KV rating - Category B
- Two-speed throttle
- Bucket liner
- Bucket cover
- Hydraulic extend jib



Specifications are subject to change without notice