

P180AJTK TRACKED

NEW GENERATION
OF TRACKED PLATFORM
DESIGNED FOR OVERHEAD
WORK AND TO PROVIDE
LOGISTICAL SUPPORT
FOR THE WORKSITE

LIFETIME EXCELLENCE



TECHNICAL SPECIFICATIONS


Maximum working height	17.7 m
Maximum working neight	17.7 111
Maximum cage floor	15.7 m
Maximum lateral outreach	7.6 m*
Basket capacity	220 kg
Angle of main boom	0° + 80°
Turntable rotation	360°
Basket dimensions	1.4 x 0.7 x 1.1 m removable
Engine featured as standard	14 HP, petrol
Height in transport conditions	2.00 m
Width in transport conditions	1.4 m (0.78 m without basket)
Length in transport conditions	4.43 m (3.85 m without basket)
GVW	2450 kg


OPTIONAL

One-man basket
Electric pump for internal use
Towbar for trailer
Diesel engine
Non-marking track belts
Radio control for travel/stabilisation
Type-approved trailer
Basket rotation
Dual-speed travel system


^{*} With basket rotation (opt)

WORKING DIAGRAMS





DIMENSIONS

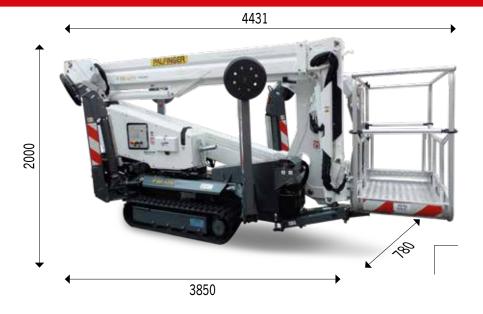

SALES DEALER