



P 160 A LOW SMART

KIT



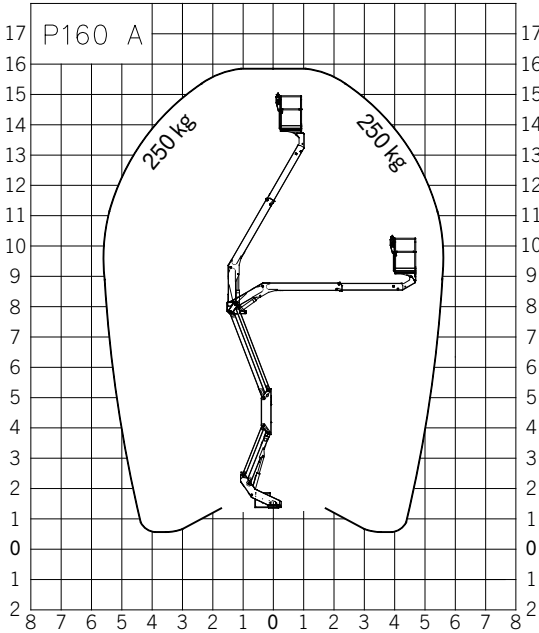


16,00 m



6,30 m con rotazione cesto (opt)
6,30 m Mit rotation des korbs (opt.)
6,30 m with basket rotation (opt)
6,30 m avec rotation nacelle (opt)
6,30 m con rotación cesta (opt)



250 kg



1,4x0,7x1,1 m



Idraulici
hydraulisch
Hydraulic
Hydrauliques
Hidráulicos



90° + 90° optional
90° + 90° optionnel
90° + 90° opcional



260°



900 kg

