

MCC INSTALLATION

PRODUCT- DESCRIPTION



**MOUNTING
COMPETENCE CENTER**

MOUNTING CRANE PK 58.002 TEC 7

EUROPEAN STANDARD



THE PLATFORM

LOW AND VERSATILE



The platform with integrated cutouts for the mudguards is attached laterally to the subframe to keep the loading height as low as possible.

LOAD SECURING



Lashing hooks, manually extendable container locks offer the best conditions for the safe transport of heavy and wide goods.

SIDE WALLS




The platform is framed by side walls made of painted aluminium profiles. 2 stowage boxes with integrated hooks on the outside of the front wall provide storage space for lashing equipment.

EVERYTHING TIDIED UP



The side walls can be safely stored in the stainless steel box with plywood body at the rear of the vehicle. Stabilizer plate holders and wheel chocks are mounted ready to hand.

WELL ILLUMINATED

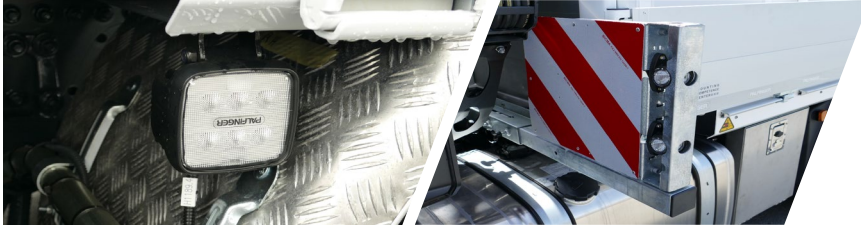

4 LED working lights provide optimal illumination of the site. The extra wide load indicators are equipped with 2 position lamps each side.

PERFEKT ABGESTÜTZT



The additional stabilizers and the front stabilizer ensure maximum stability of the vehicle and best crane performance

TRUCK SPEZIFICATION	MAN TGS 35.510 8x4H-6 BL
Wheelbase	1795+3505+1350mm
Required overhang	2050mm
Exhaust pipe	Right side with floor outlet
Cabin	TM
Front mounting plate	For crane stabilizers
Side collision protection	From truck manufacturer
Underrun protection	From truck manufacturer
Trailer coupling	From truck manufacturer
Side marker lights	From truck manufacturer
Wheel chocks	From truck manufacturer

INSTALLATION-SPEZIFICATION	Cranes 31-60mt
Position of the crane	Front (CR-60-LKW-F)
Front stabilizer	MAN single stabilizer (STAB-MAN-01)
Chassis extension	Up to 1,5m (STRET-02)
Hydrodrive oil cooler	Displacement (HYDRO)
Steering axle vent	On the rear aggregate (HYDAIR)

INSTALLATION-SPEZIFICATION	Cranes 31-60mt
Platform	PALFINGER low built platform (PLAT-2301)
Platform length	approx. 6300mm
Front wall height	1000mm
Side wall height	400mm
Side wall split	With 2 pillars (3-WALL-IP)
Platform border profile	90° (PROF-90) 16 pcs. 2t-lashing rings (RING-01)
Forklift protection	Aluminium (FORK-BUMP)
Container locks	Manual extendable (CONT-EXT-MAN)
Rear wall rest	Horizontal extendable (RWALL-REST)
Mudguards	1x plastic single axle mudguard (GUARD-01) 2x alu quarter circle mudguards (GUARD-06)
Toolboxes	Performance toolbox L (BOX-120) Custom side wall toolbox (BOX-1000) Aluminium anodized (BOX-C-ALU)
Trays	Chain box on front wall (TRAY-FW)
Stabilizer plate holder	5 pcs. Standard (PLATE-STD)
Side collision protection	Adjustment (SPRO-STD)
Lighting	4 pcs. LED working lights (LED-WORK-4) Side marker lights (SIDE)
Extra wide load indicators	2 pcs. indicators incl. position lamps (MARK-WIDE-01)
R70 Reflector plates	At the rear (MARK-R70)
Battery charger	Installation in the cabin (RC-CR)
HPSC-Setting	Crane + front stabilizer (HPSC-60 + HPSC-FST)

