

MBB C 1000 S

THE POWERFUL LIFT FOR THE DAILY USE

LIFETIME EXCELLENCE




MBB C 1000 S

THE CANTILEVER

MBB C 1000 S

- 1000 kg lifting capacity at 700 mm load centre
- Ideal for daily distribution
- Optimal performance
- Available with aluminium or steel platform
- Useful Life
- Load centre at 700 mm to 900 mm

LOAD DIAGRAM

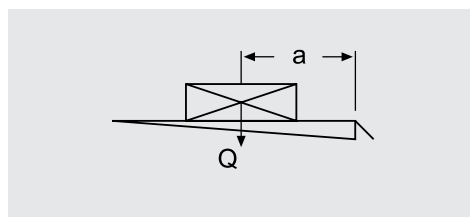

MBB C 1000 S	
a (mm)	Q (kg)
700	1000
875	800
1150	600
1700	400


WEIGHTS

Platform type	depth (mm)	width (mm)	weight (kg)
Alum.	1550	2500	376
	1700	2500	384
	1825	2500	390
	2050	2500	401
Steel	1509	2500	519
	1809	2500	559
	2109	2500	599

TECHNICAL DATA

	MBB C 1000 S
Lifting Capacity	1000 kg
Main beam	180 x 180 mm
Lifting gear hydraulics	2 x lift cylinder 2 x tilt cylinder
Platform overlap with floor	- 57 mm
Lift arm pitch	1310 mm
Load centre - lengthwise	700 mm
Load centre - across center	50 % of the full load on one side
Inclination angle of the platform	+90° to - 10°

DIMENSIONS

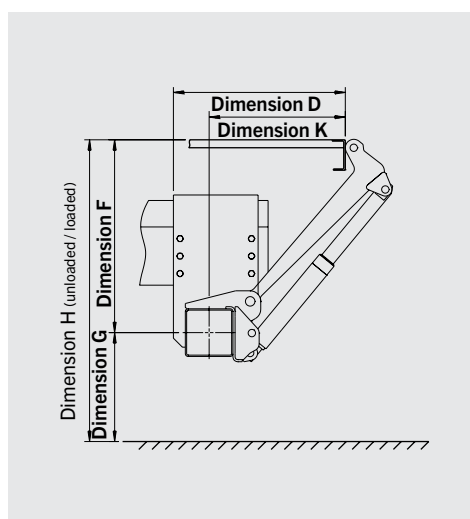

Lift arms (in mm)	700	800	900
H (max.) Loading height unloaded	1256	1409	1546
H (min.) Loading height loaded	906	922	998
F (max.) Middle of main beam to upper edge of loading floor	728	811	894
K (min.) at dimension F (max.)	515	570	626
D (min.) Installation space (min.)	665	720	776
F (min.)	529	572	625
K (max.) at dimension F (min.)	710	801	886
D (max.) Installation space (max.)	860	951	1036

PALFINGER TAIL LIFTS GmbH
 Fockestraße 53
 27777 Ganderkesee / Germany
www.palfinger.com



The specified weights apply to the lightest platforms of the corresponding depth. Applications shown in the leaflet do not always correspond to the standard specifications. Design and specification are subject to change without prior notice. Dimensions may vary. Subject to technical changes, errors and translation mistakes.