

C 750 S

THE FLEXIBLE TAIL LIFT

LIFETIME EXCELLENCE




C 750 S

THE FLEXIBLE TAIL LIFT

C 750 S

- Especially for vehicles up to 7.5 t
- Robust 4-cylinder lifting mechanism
- Mounting plates interchangeable with C 750 L for stocking purposes
- Single piece underrun protection device / optional 3-piece
- Fixture for a ball-head coupling is available with 3-piece underrun protection device
- Also available as partial platform

LOAD DIAGRAM

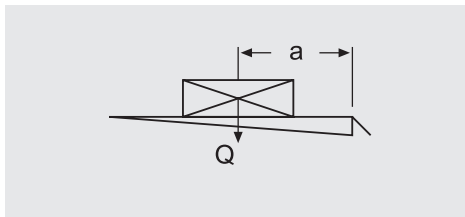

C 750 S	
a (mm)	Q (kg)
600	750
700	650
820	550
1120	400

WEIGHTS


Platform type	Height (mm)	Width (mm)	Weight (kg)
Alum.	1450	2100	from 210 *

*) 13 kg additional weight with 3-piece underrun protection device

TECHNICAL DATA

	C 750 S
Lifting capacity	750 kg
Main beam	120 x 80 mm
Lifting gear hydraulics (cylinder)	2 x lifting cylinders 2 x tilting cylinders
Platform overlap with floor	- 44 mm
Lift arm pitch	460 mm / 1120 mm / 1240 mm
Load centre - longitudinal	600 mm
Load centre - across centre	Central, 50 % of rated load on one side
Inclination angle of the platform	+90° to - 10°

DIMENSIONS

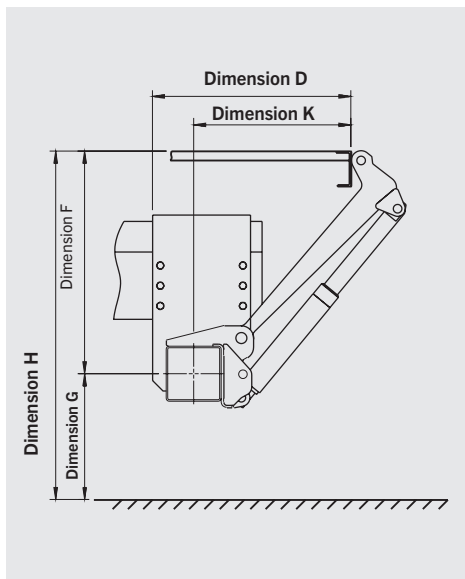

	550	680
Lifting arm length (mm)		
H (max.) loading height, unloaded	990	1190
H (min.) loading height, loaded	700	880
F (max.) middle of main beam to upper edge of loading floor	540	640
K (min.) at dimension F (max.)	419	503
D (min.) installation dimension, minimum	517	601
F (min.)	370	490
K (max.) t dimension F (min.)	555	624
D (max.) installation dimension, maximum	664	733
G (max.) unloaded (middle of main beam to ground)	450	550
G (min.) unloaded	330	390

Available for:

- Mercedes Benz Sprinter 3/4/5
- VW Crafter 30/35/50
- Ford Transit 330-470 V363
- Renault Master X62 FWD/RWD
- Opel Movano X62, Nissan NV400 FWD/RWD
- Iveco Daily 35C-72C
- Fiat Ducato / Peugeot Boxer / Citroen Jumper
- Weitere Fahrzeugtypen auf Anfrage

PALFINGER TAIL LIFTS GmbH
 Fockestraße 53
 27777 Ganderkesee / Germany
www.palfinger.com

