

MBB C 2000 S

DYNAMIC LIFTING PERFORMANCE

LIFETIME EXCELLENCE




MBB C 2000 S

DYNAMIC LIFTING PERFORMANCE

MBB C 2000 S

- The powerhouse for professional goods distribution
- 2,000 kg lifting capacity with 1,000 mm load distance
- Design with aluminium or steel platform
- Four-cylinder lifting mechanism with lifting arm lengths from 700 to 1,000 mm
- versatile attachment to all common vehicle types
- Large selection of optional equipment available

LOAD DIAGRAM

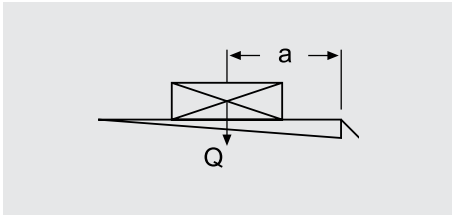

MBB C 2000 S	
a (mm)	Q (kg)
1000	2000
1250	1600
1600	1250
1900	1050
2200	910


WEIGHTS

platform type	height (mm)	width (mm)	weight (kg)
Alu	1550	2500	511
	1700	2500	520
steel	1509	2500	625
	1809	2500	665

TECHNICAL DATA

Lifting capacity	2000 kg
Main beam	180 x 180 mm
Lifting gear hydraulics	2 x lifting cylinders 2 x tilting cylinders
Platform overlap with floor	- 63 mm
Lifting arm pitch	1300 mm
Load centre, longitudinal	1000 mm
Load centre, across centre	Central, 50% of rated load on one side
Inclination angle of the platform	+90° to - 10°

DIMENSIONS

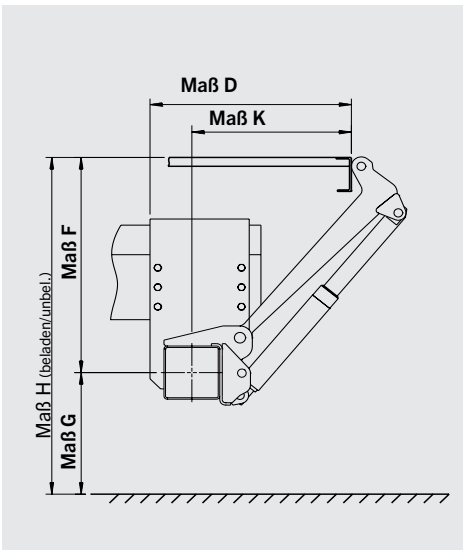

Lifting arm lengths (mm)	700	800	900	1000
H (max.) loading height, unloaded	1160	1345	1444	1651
H (min.) loading height, loaded	883	916	1006	950
F (max.) middle of main beam to upper edge of loading floor	650	785	820	977
K (min.) at dimension F (max.)	618	641	751	721
D (min.) installation dimension, minimum	768	791	901	871
F (min.)	508	566	614	569
K (max.) at dimension F (min.)	726	820	907	1041
D (max.) installation dimension, maximum	876	970	1057	1191

PALFINGER Tail Lifts GmbH
 Fockestraße 53
 27777 Ganderkesee
 Deutschland
www.palfinger.com

