

TRIPLE - Z



Q150Z, Q170Z

Q200Z




Q180Z HPLS

PALFINGEREPSILON.COM



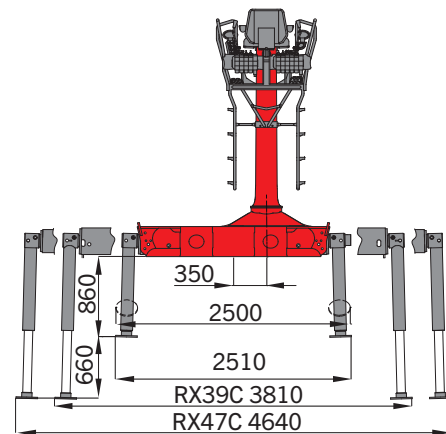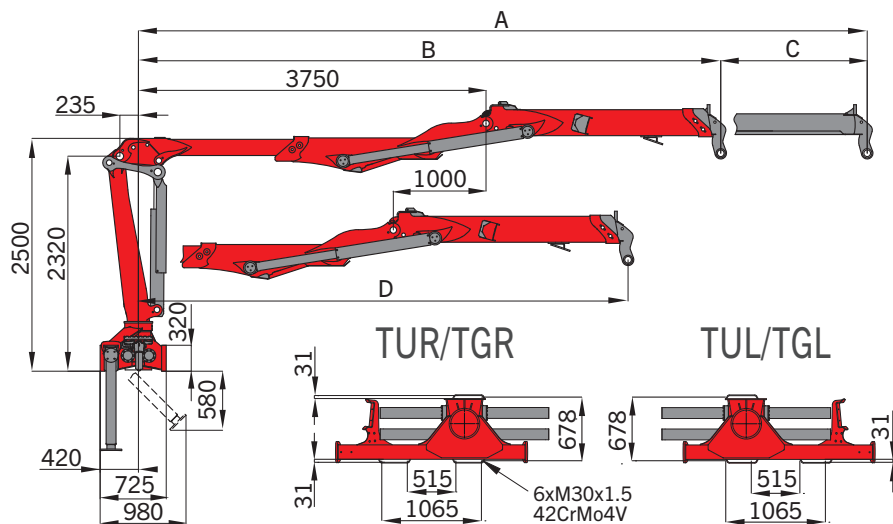

	79 TR	95 TR
A	7850	9500
B	6270	6340
C	1580	3160
D	5270	5340
E	1100	1160
F	3420	3370
G	4420	4370

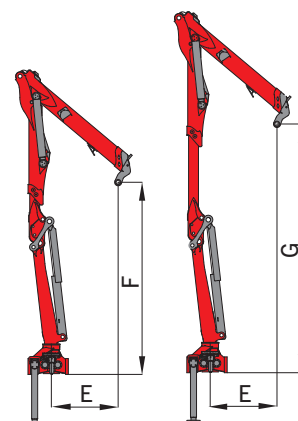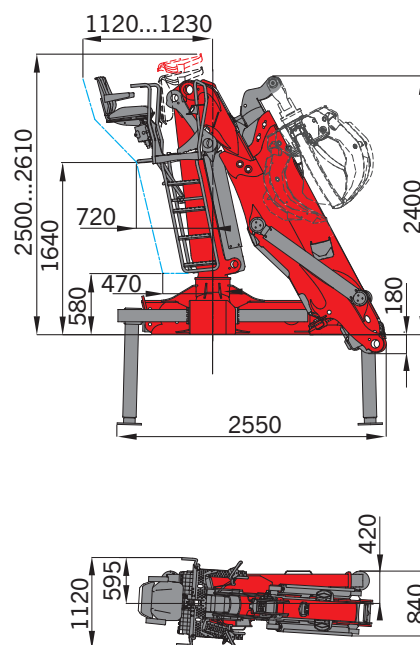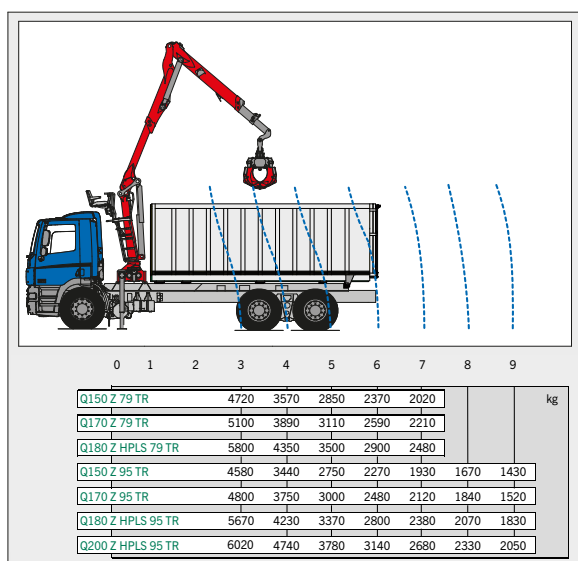

		Q150Z		Q170Z		Q180Z HPLS		Q200Z
		79TR	95TR	79TR	95TR	79TR	95TR	95TR
ONROAD RECYCLING								
	[kNm]	143	138	156	150	175	170	193
	[kNm]	30		32				
	[°]	425						
	[m]	7,9	9,5	7,9	9,5	7,9	9,5	9,5
	[bar]	270		290		290 (320 HPLS)		350
	1K [l/min]	1 x 90						
	2K [l/min]	2 x 80						
	1K LS [l/min]	1 x 150						
	[kg]	2820	2920	2860	2960	2870	2970	2970
	1 2	1+1	2+1	1+1	2+1	1+1	2+1	2+1

Lifted weight, net without accessories; weight of standard crane, incl. oil, spot lights and cyclinder protection, without link, rotator, material tolerance +/- 5%