

VOLVO

P 750

FM 460 HP 8X4 BL

KONTRAKTNUMMER: 11750050


NY

I PRODUKTION



TILBUDSINFORMATION

Lokationsdetaljer

Löbau, 02708 - Tyskland 

Forhandler, detaljer

Palfinger Platforms GmbH

Produkttype

Ny

Kontraktnummer

11750050

Forhandler, e-mail

sales.platforms@palfinger.com

Forhandler, telefon


004935854796121

| | | | |
|---------------------------|--------------|--------------------------|----------------------|
| Producent | PALFINGER | Søjlerotation | 540° |
| Model | P 750 | Kurvestørrelse | 3,88 x 1,05 x 1,10 m |
| Produktionsår | 2024 | Kurvens kapacitet | max. 600 kg |
| Rækkevidde | max. 39,00 m | Kurvens rotation | +/- 200° |
| Maks. arbejdshøjde | 75,00 m | Kurvemateriale | ALU |
| Lastbilproducent | Volvo | Hestekræfter | 469 PS/345 kW |
| Vehicle type | FM 460 | Emissionsnorm | EURO 6 |
| Førerhus | FM-DAY | Aksler | 8x4 |
| Akselafstand | 5600 mm | Totalvægt | 32.000 kg |
| | | Opbygning | Hubarbeitsbühne |

P 750

SENSATIONAL WORKING HEIGHT

LIFETIME EXCELLENCE

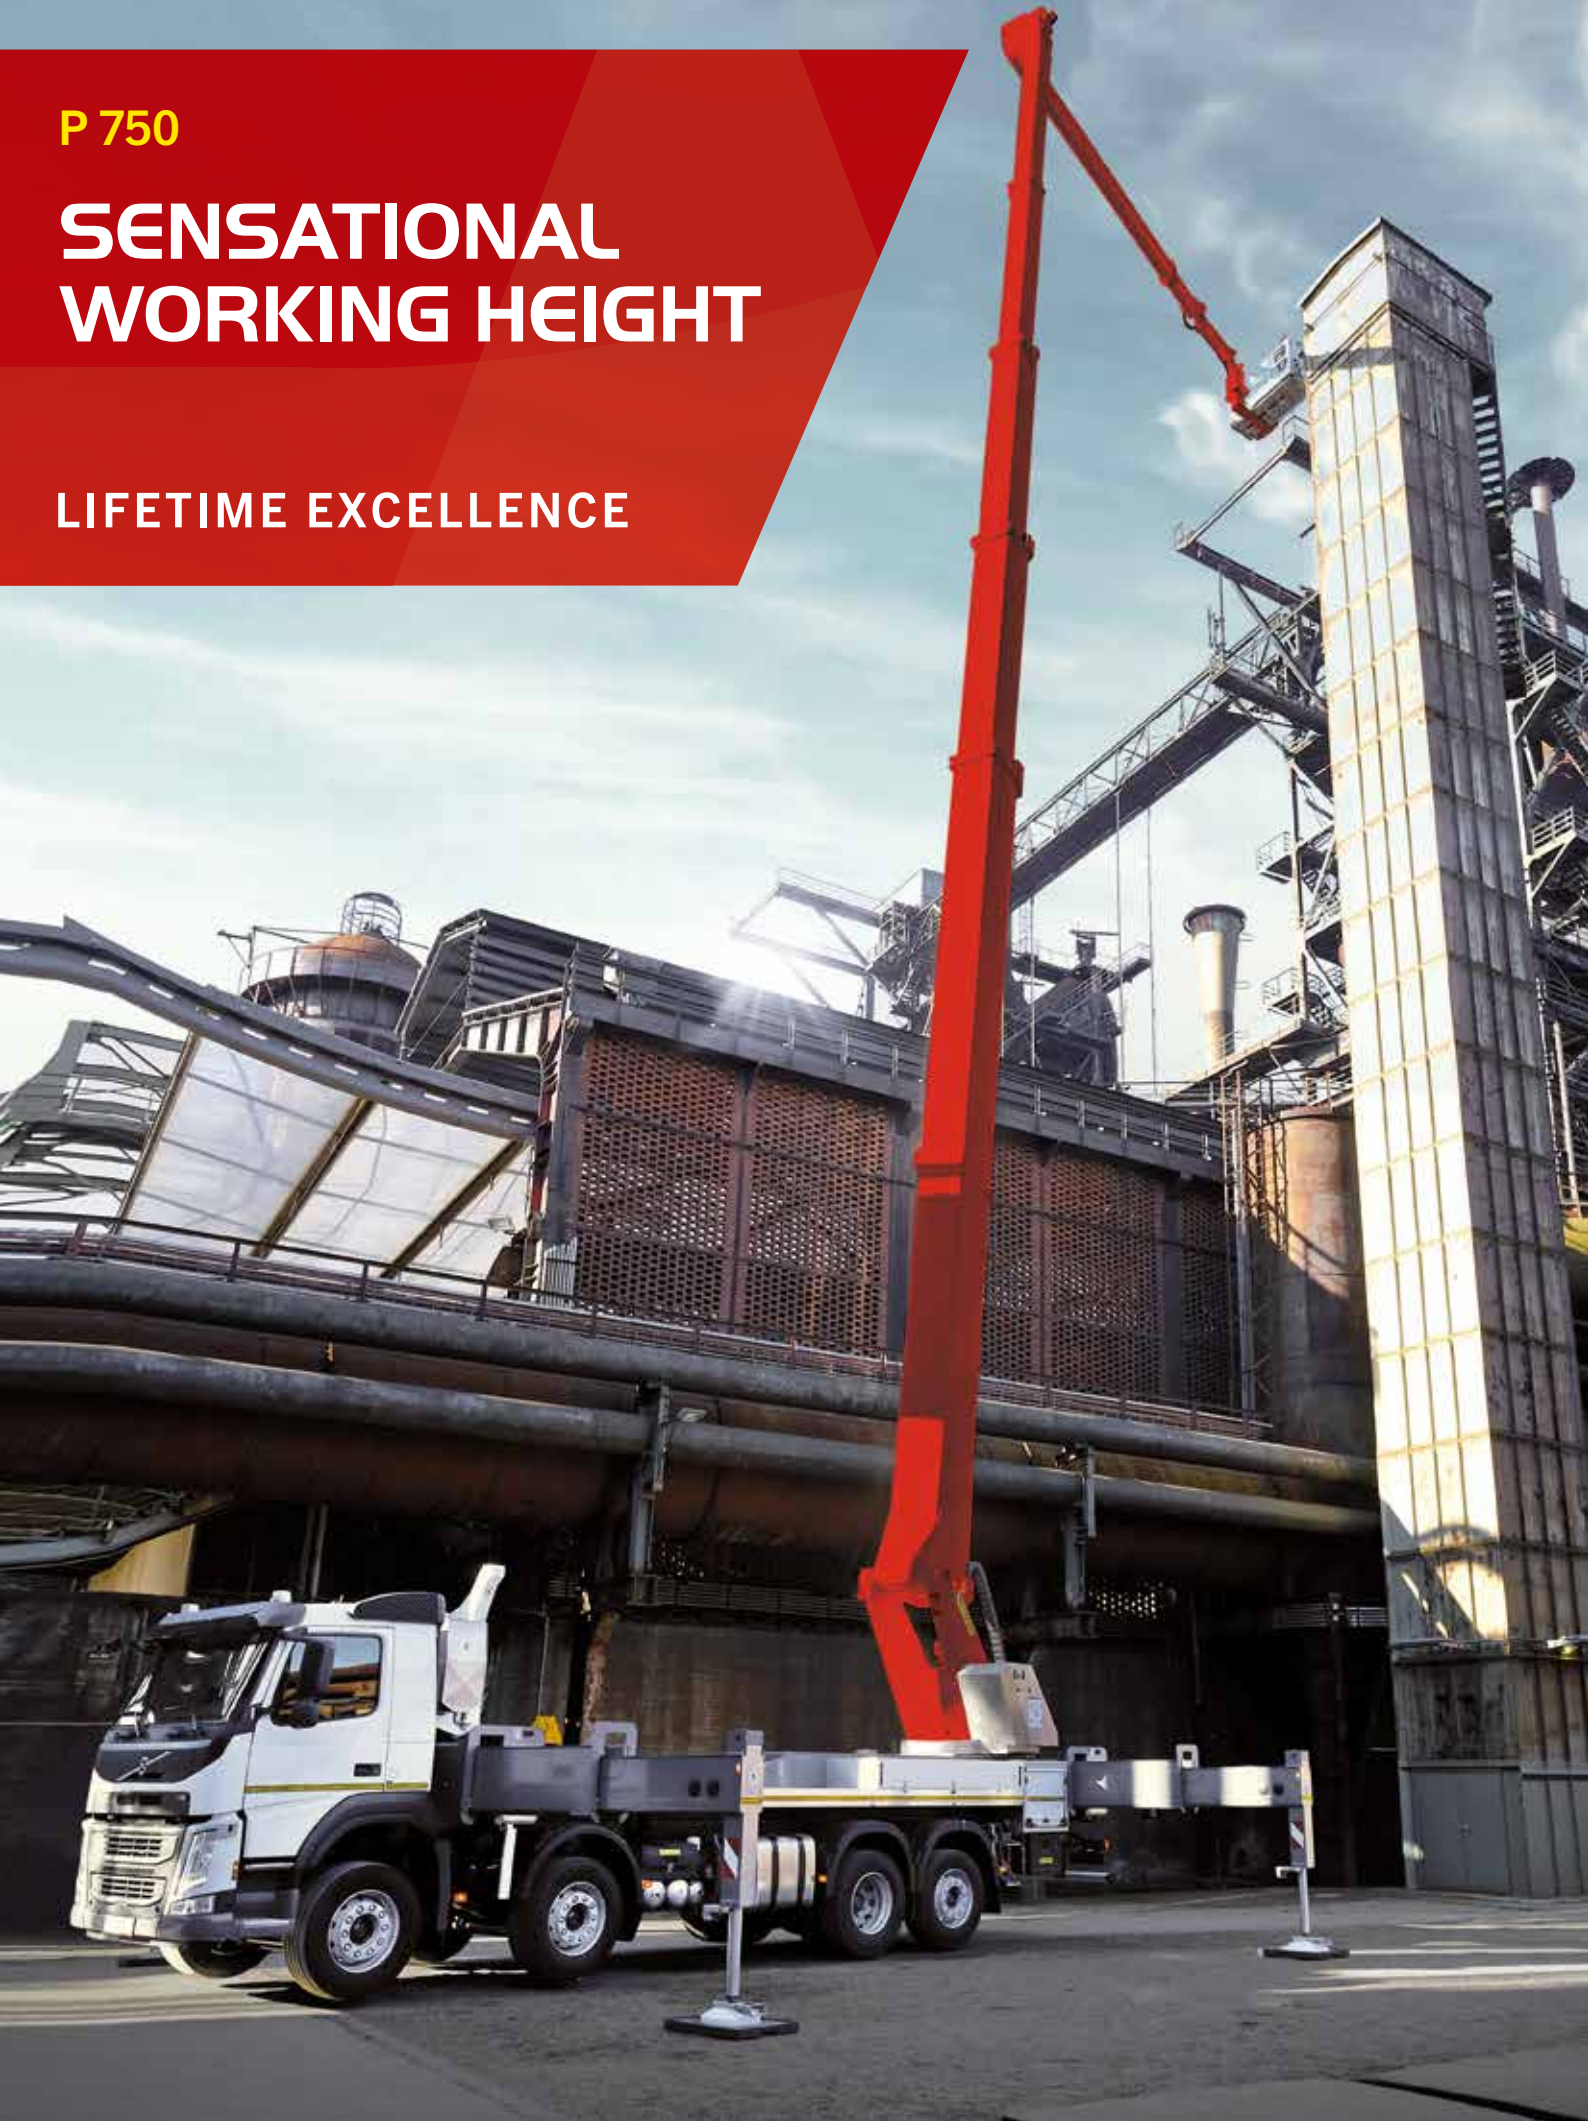

HIGHLIGHTS

- Greater working range thanks to 240° X-jib
- 2 x 200° basket rotation for perfect positioning of the workman basket
- Telescopic upper boom up to 19 m total length
- Automatic telescope lubrication system supplies the lower boom telescopes with grease during platform operation
- Telescopic basket with up to 600 kg basket load and integrated preparation for Powerlift-System
- Hanging basket enables operators to work close to objects

STANDARDS














- Rear view camera
- Memory-Function
- Automated positioning system
- Telescopic basket
- Driver information system
- Safety spreader plates
- 230 V CEE current supply with CEE socket in the workman cage
- Assistance systems

OPTIONS

- Powerlift-System: Transport device for working material with max. 600 kg payload to be carried externally on the basket.
- Material handler/crane in basket for lifting objects from the Powerlift and direct assembly at the place of use (400 kg payload).
- Telescopic camera basket with 600 kg basket load including mount for film illumination
- Ultrasonic sensors to protect the workman basket from collisions
- Mobile radio remote controls for access platform and stabilizer operation
- Access from both sides (access ladder on right and left-hand side) with lighting




TECHNICAL SPECIFICATIONS

| | | | | | |
|---|-----------------------------|----------|---|-----------------------------|----------------------|
|  | Total weight * | 32200 kg |  | max. outreach | 39 m |
|  | Overall length | 14.10 m |  | Rotation angle of turntable | 540° |
|  | Width in transportposition | 2.54 m |  | Rotation angle of cage | 2 x 200° |
|  | Height in transportposition | 3.95 m |  | Rotation angle of cage boom | 240° |
|  | max. stabiliser width | 8.89 m |  | Size of cage | 3.88 x 1.05 x 1.10 m |
|  | max. working height | 75 m |  | max. cage load | 600 kg |
|  | max. cage bottom height | 73 m | | | |


* Depends on truck chassis

WORKING DIAGRAMS

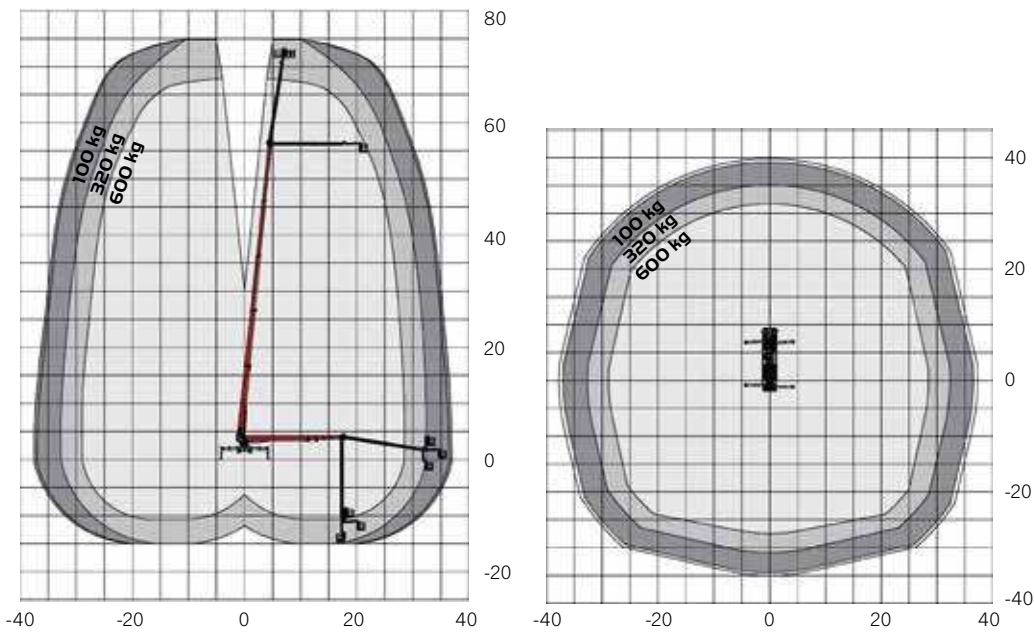

* A possible 2% tolerance is contingent on structural components

DIMENSIONS

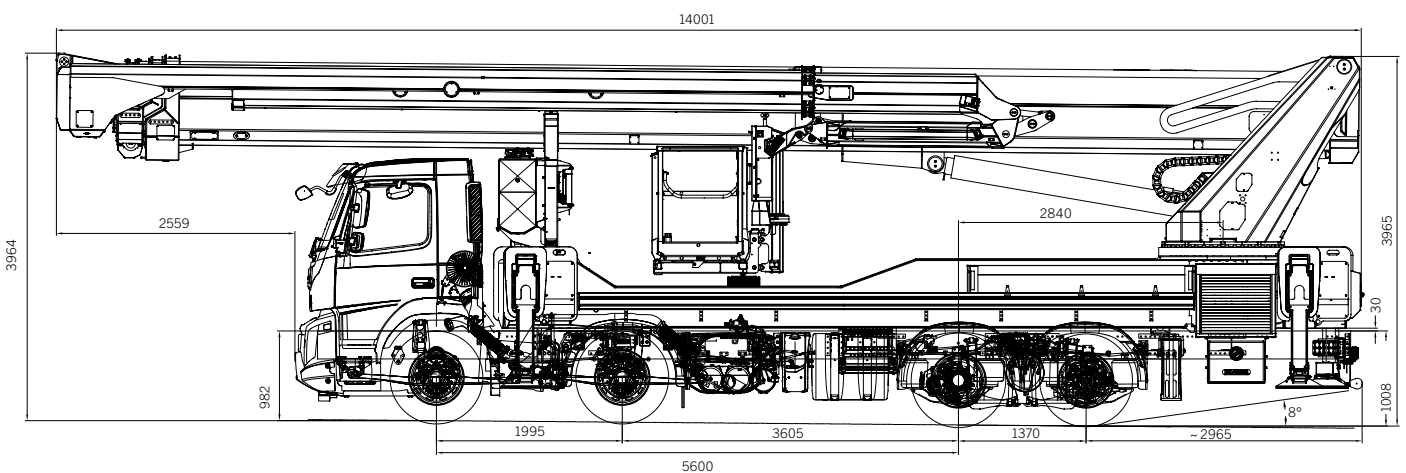

YOUR CONTACT

Palfinger Platforms GmbH

Düsseldorfer Str. 100
47809 Krefeld | Germany

KP-P750M2+EN

Units shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.