

IVECO

## P 200 TXE-E SMART PLUS

NEW

IN PRODUCTION



### SPECIFICATION

- Advanced performance telescopic platform, mounted on a 3.5 tonne truck.
- Multifunction electric controls for greater precision, speed, and manoeuvring comfort
- Vertical stabilisation with frontwards extending outriggers which compensate for uneven and sloping ground
- Platform with three stabilisation possibilities for each working condition:
  1. Within the outer vehicle limits: for maximum compactness overall within small spaces
  2. With front crossmembers extended: for maximum performance when working in elevated positions
  3. Partial stabilisation: for maximum performance with minimum overall dimensions.

### STANDARD

- 12V socket on basket

### OFFER INFORMATION

Location details

Modena, 41122 - Italy 

Dealer Name

Palfinger SRL

Product type

New

Contact person

Palfinger SRL

Dealer E-mail

[info@palfingerplatformsitaly.it](mailto:info@palfingerplatformsitaly.it)

Dealer phone

**059252426**

- 230V / 16A socket A or 110V / 16A socket on basket
- Aerial section centring display for aerial part closing
- Air/water line from the column to the basket
- Anti-collision system Cab/boom
- Cage rotation 90°+ 90°
- Electric hour meter
- Inclinator with audio alarm signal and signal lights relating to aerial work conditions
- Painting with cataphoresis process, with KTL system patented by PALFINGER
- Preparation for insulation upgrade ability
- Set of 4 spreader plates with proper housing on the chassis
- Top boom protection.

PRODUCT

|                     |                        |                       |                |
|---------------------|------------------------|-----------------------|----------------|
| Manufacturer        | PALFINGER              | Turret rotation       | 370°           |
| Model               | P 200 TXE-E SMART PLUS | Basket size           | 1,4x0,84x1,1 m |
| Construction year   | 2025                   | Basket capacity       | 250 kg         |
| Outreach            | 11,70 m                | Basket turning device | 90°+90°        |
| Max. height of work | 19,7 m                 | Basket material       | alu            |



TRUCK

|                    |       |                      |         |
|--------------------|-------|----------------------|---------|
| Truck manufacturer | IVECO | Wheel base           | 4100 mm |
| Construction year  | 2025  | Emmission standard   | EURO 6  |
| Drivers cabine     | B     | Axes                 | 4x2     |
|                    |       | Gross vehicle weight | 3,5 TON |

**PALFINGER**

Palfinger Platforms Italy s.r.l.



A

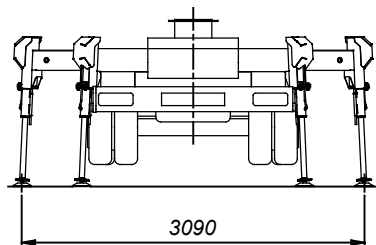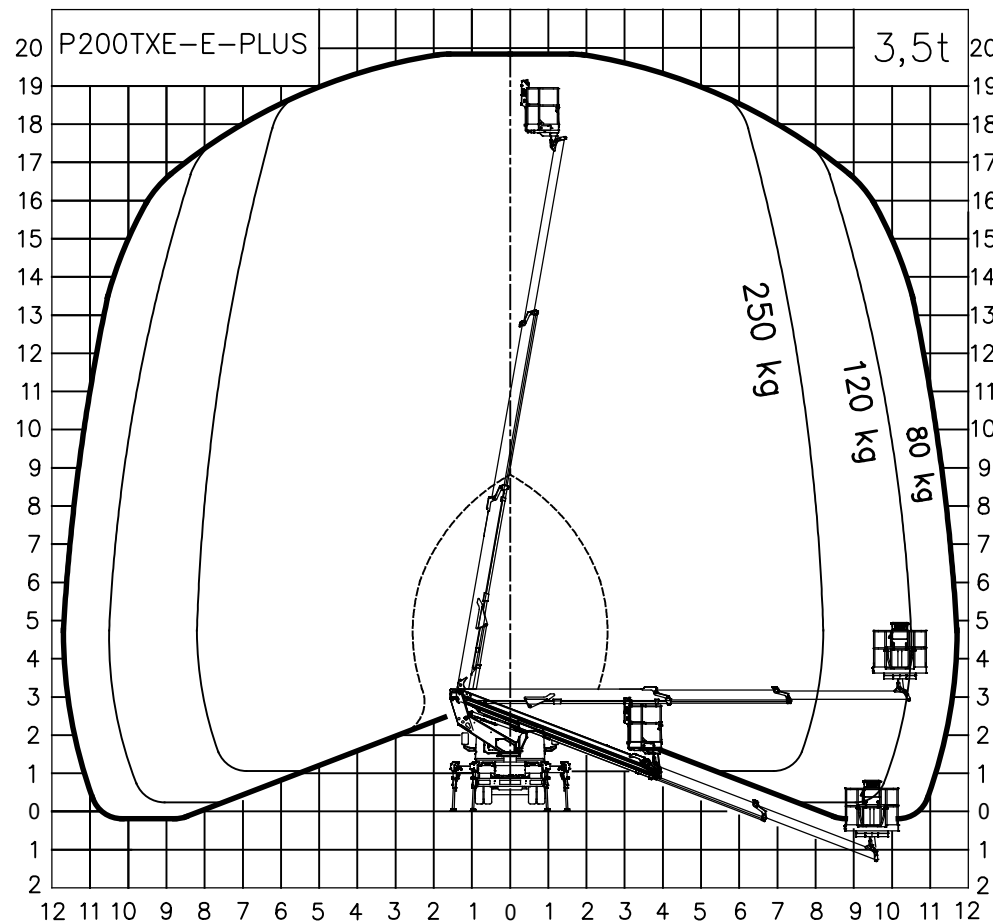

WORK AREA 01



P200TXE-E-PLUS ON IVECO DAILY 35S14 WB 4100

B

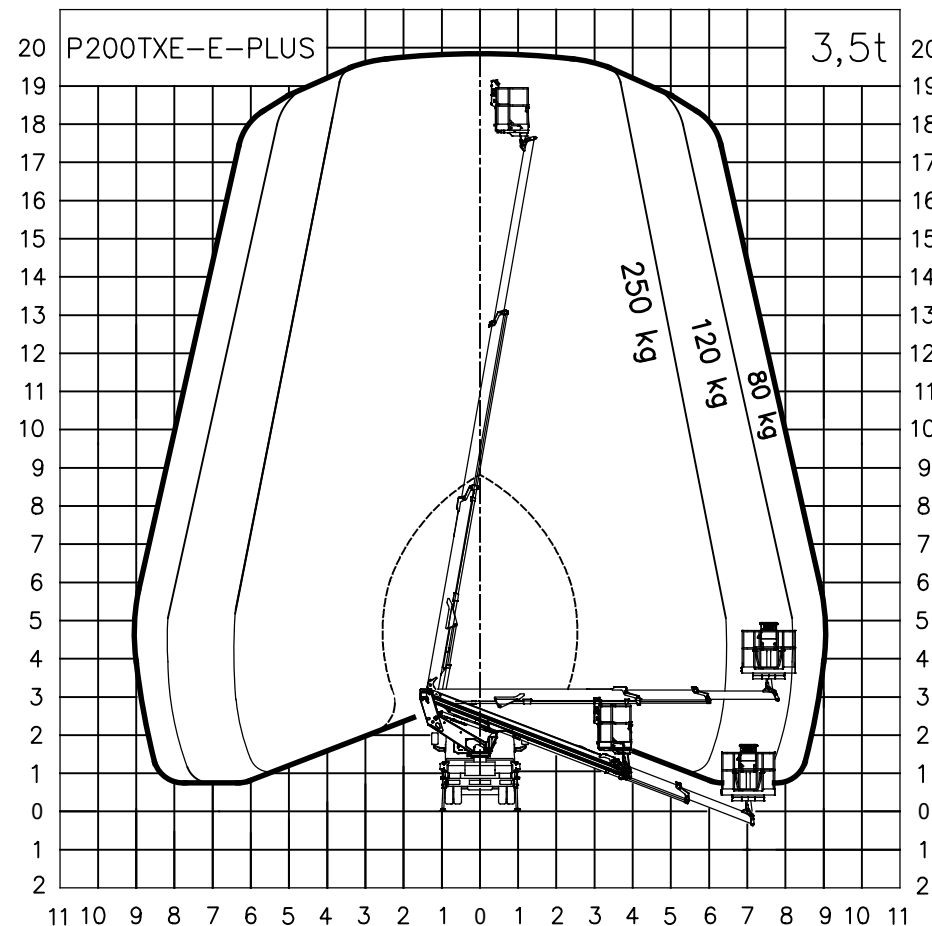

**PALFINGER**

Palfinger Platforms Italy s.r.l.

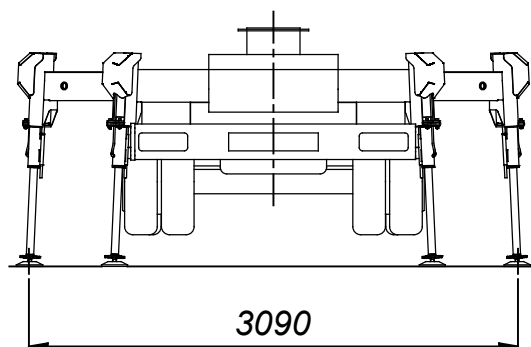
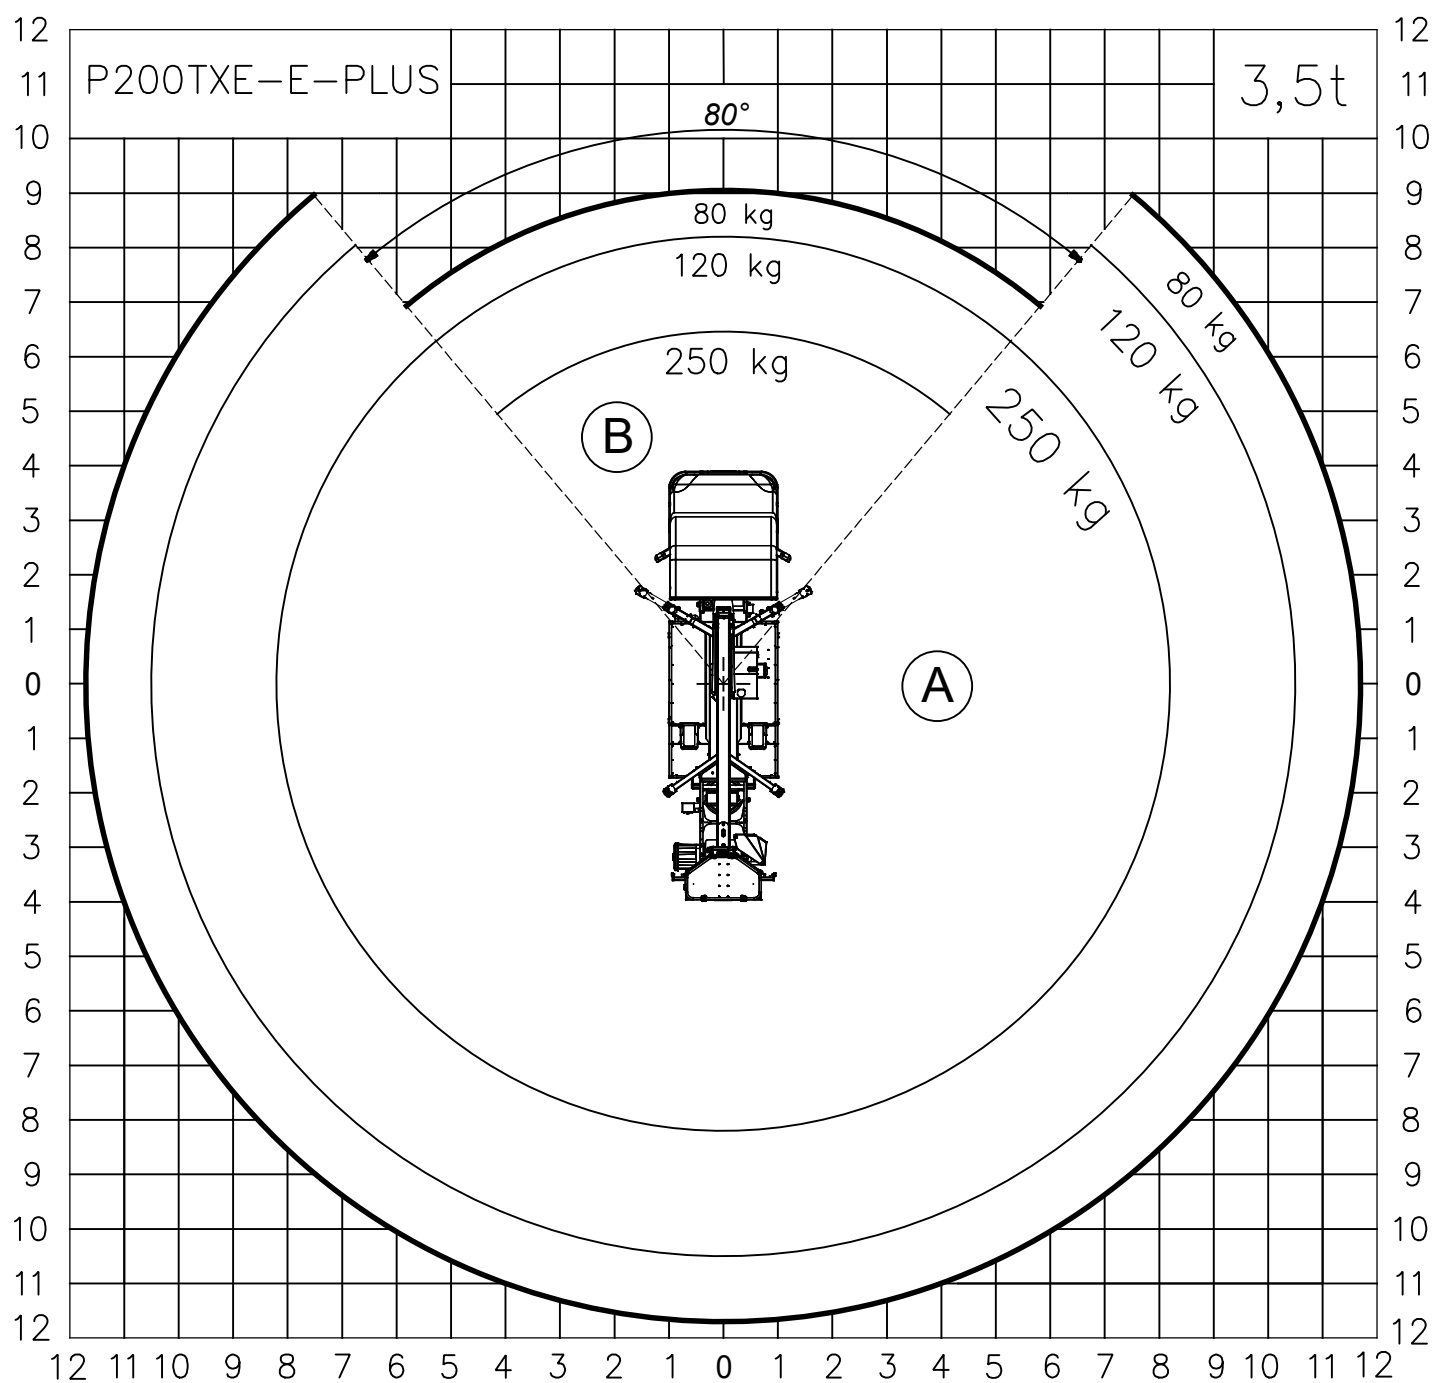


WORK AREA 02\_01

P200TXE-E-PLUS ON IVECO DAILY 35S14 WB 4100

**PALFINGER**

Palfinger Platforms Italy s.r.l.

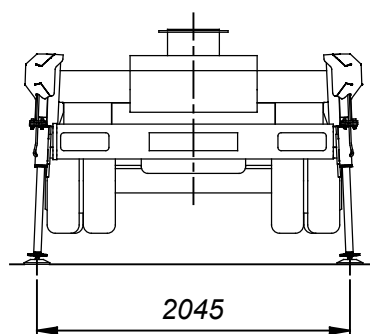
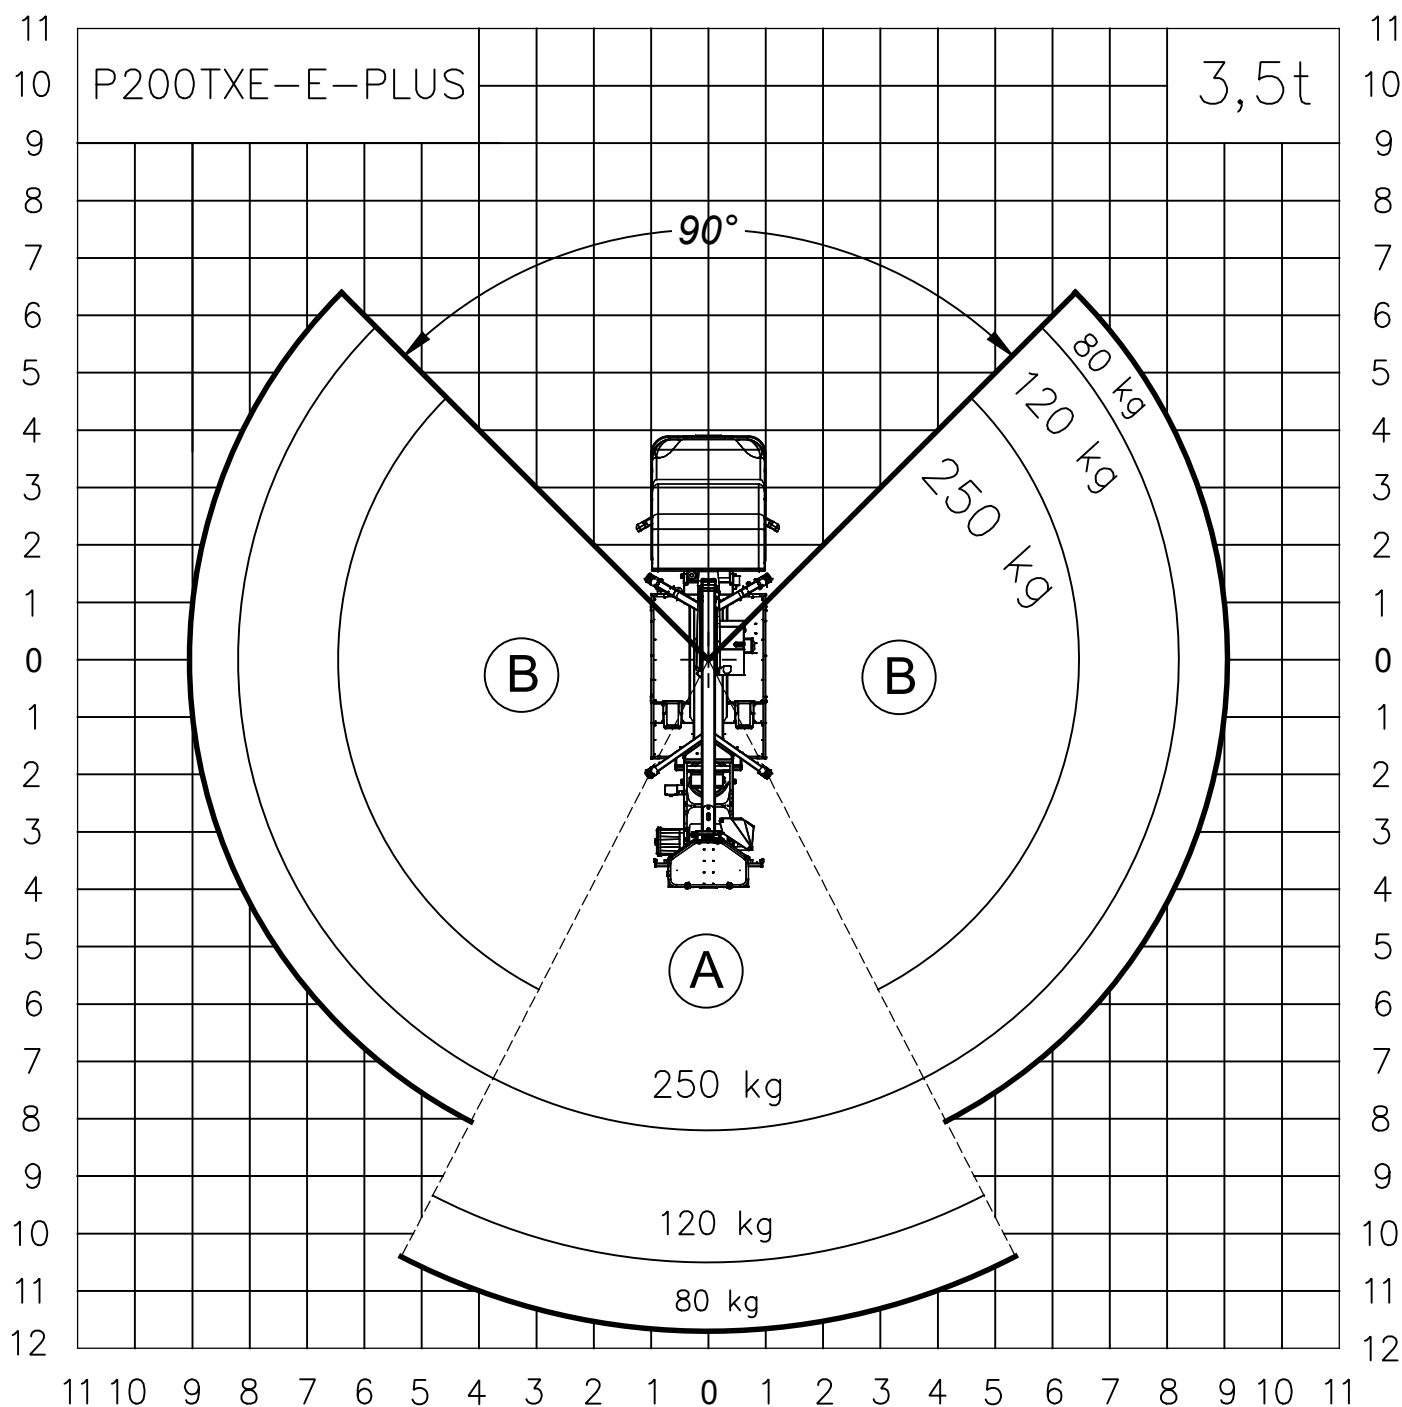


WORK AREA 02\_02

P200TXE-E-PLUS ON IVECO DAILY 35S14 WB 4100

**PALFINGER**

Palfinger Platforms Italy s.r.l.

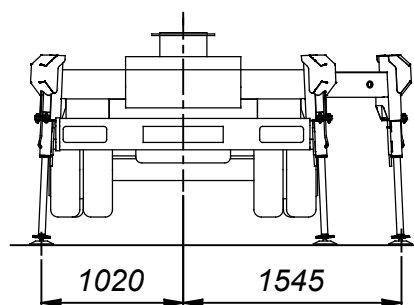
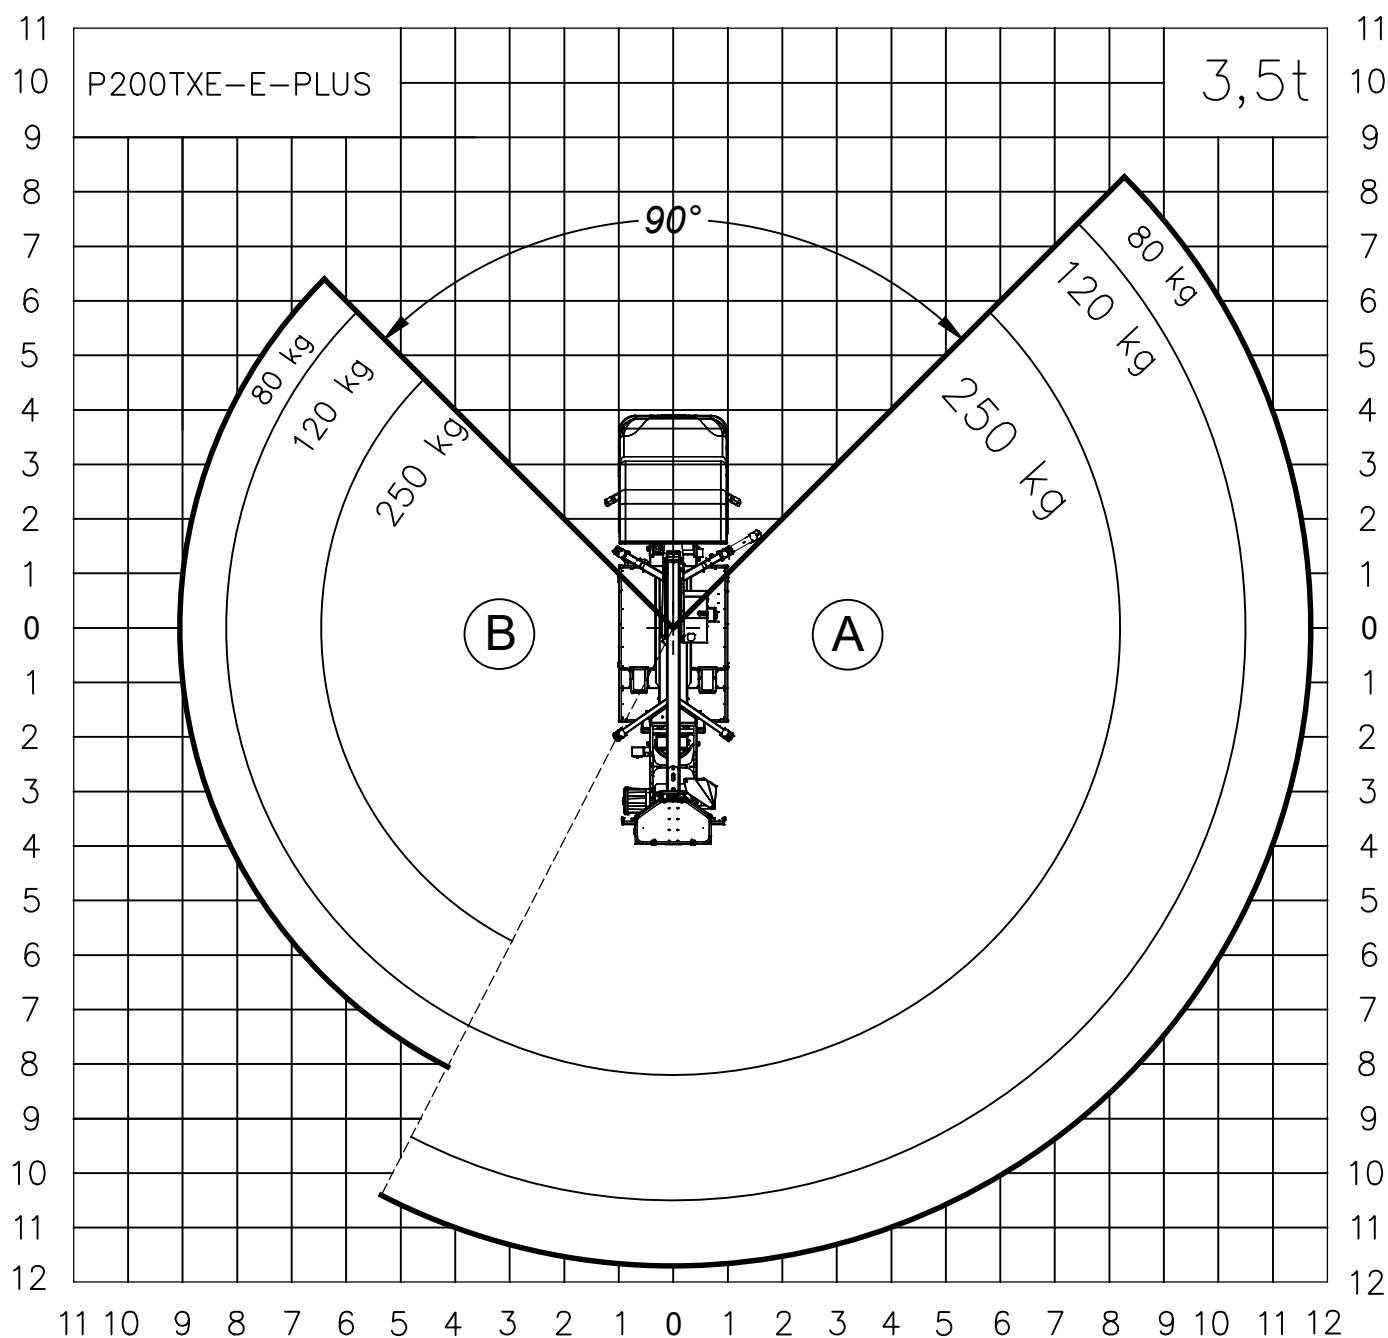


WORK AREA 02\_03

P200TXE-E-PLUS ON IVECO DAILY 35S14 WB 4100

**PALFINGER**

Palfinger Platforms Italy s.r.l.

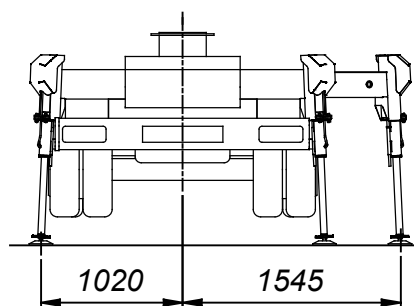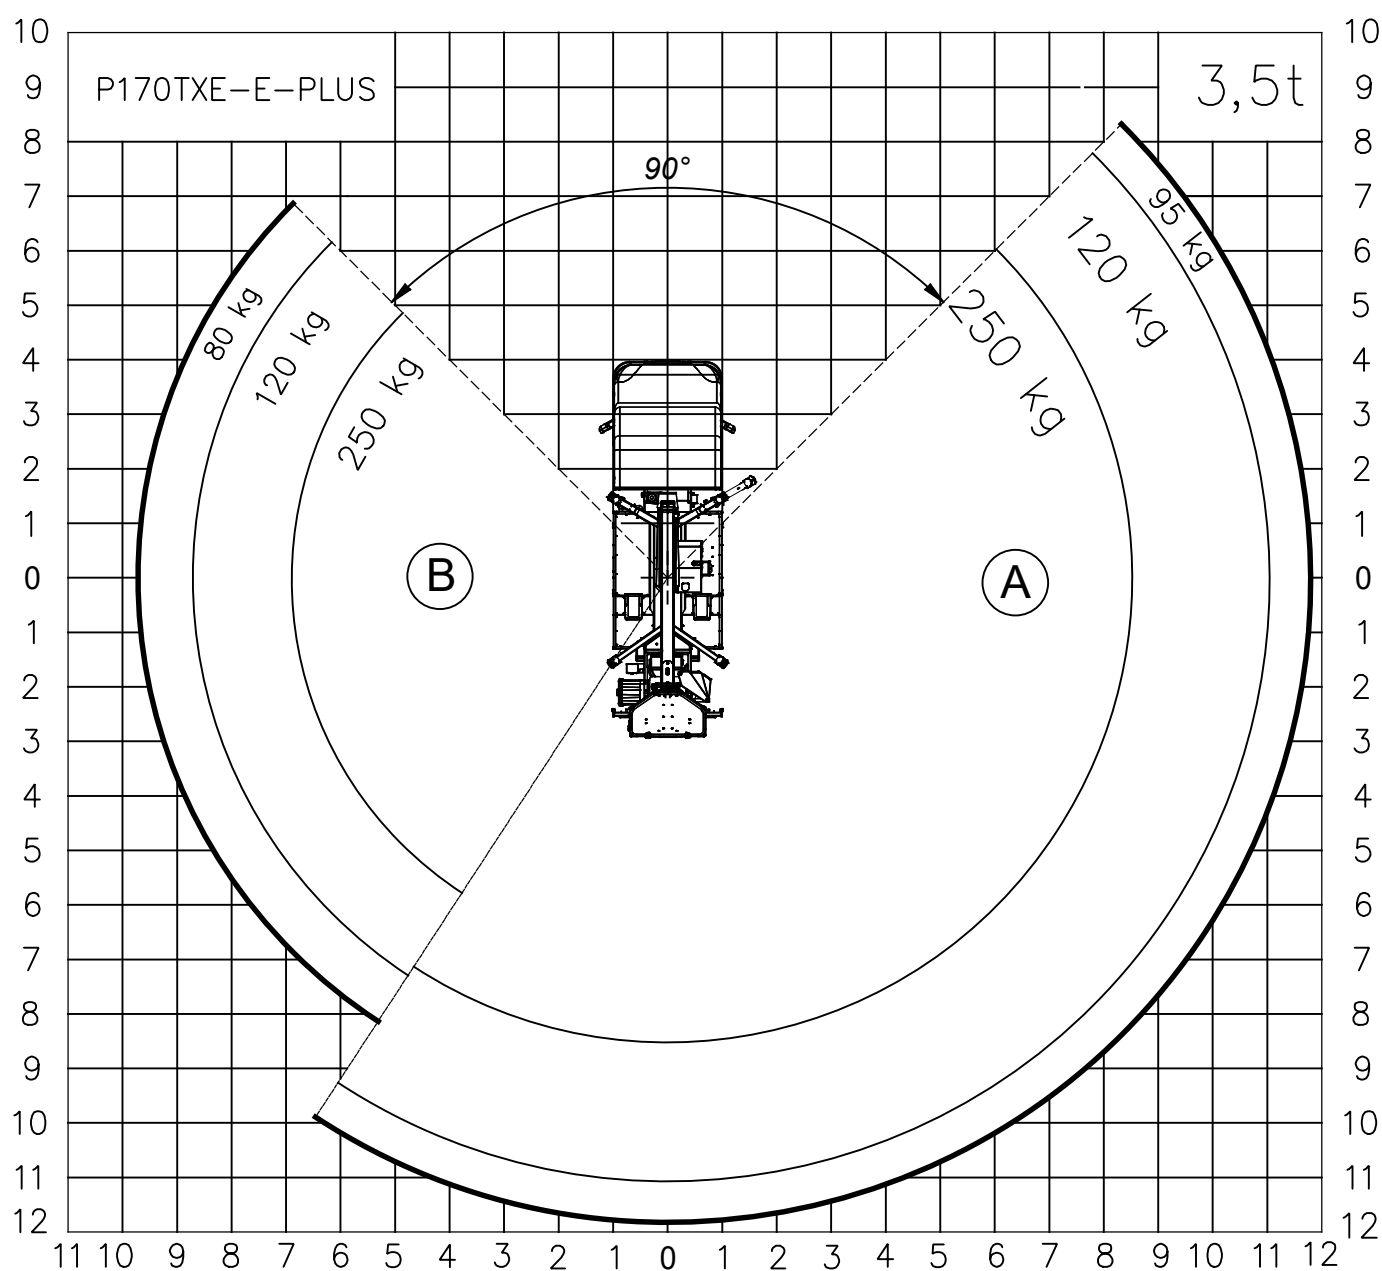


WORK AREA 02\_03

P170TXE-E-PLUS ON IVECO DAILY 35S14 WB 3750

## **P 200 TXE-E SMART PLUS**

**MAXIMUM PERFORMANCE  
OFFERED BY LATERAL  
OUTREACH AND SMALL  
STABILISATION FOOTPRINT**

**LIFETIME EXCELLENCE**

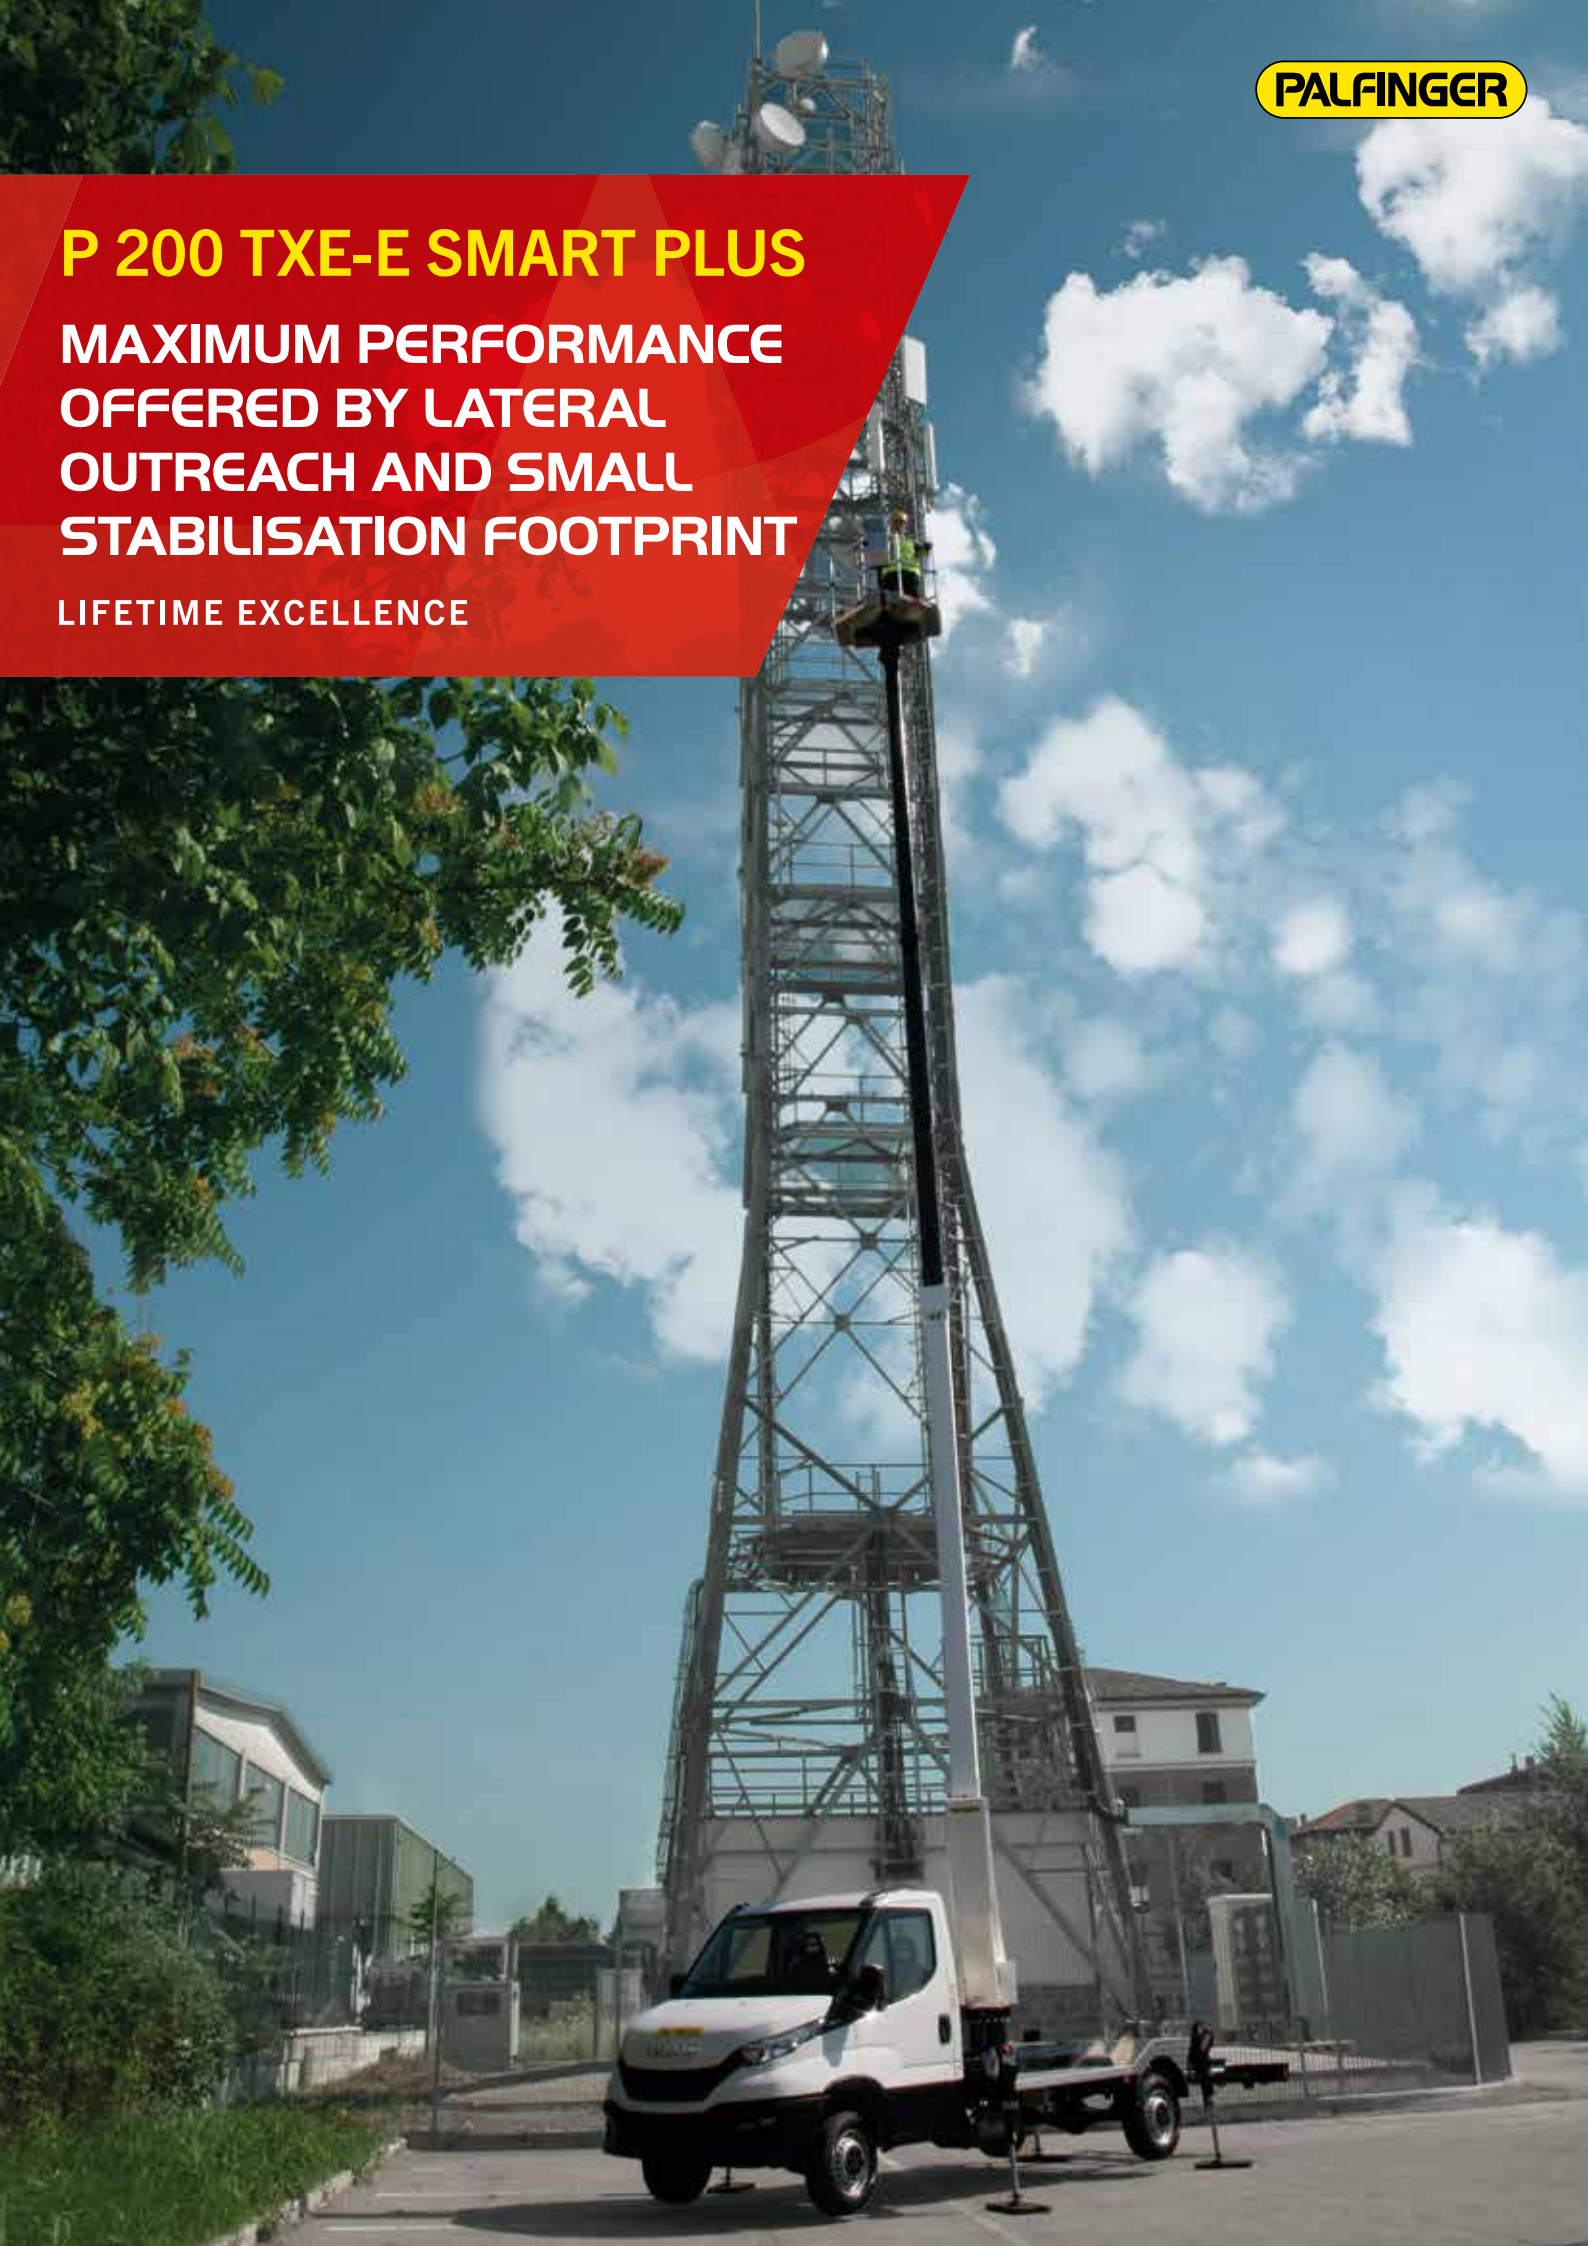

## STRENGTHS

- Advanced performance telescopic platform, mounted on a 3.5 tonne truck.
- Multifunction electric controls for greater precision, speed, and manoeuvring comfort
- Vertical stabilisation with frontwards extending outriggers which compensate for uneven and sloping ground
- Platform with three stabilisation possibilities for each working condition:
  - Within the outer vehicle limits: for maximum compactness overall within small spaces
  - With front crossmembers extended: for maximum performance when working in elevated positions
  - Partial stabilisation: for maximum performance with minimum overall dimensions.

## STANDARD

- 12V socket on basket
- 230V / 16A socket A or 110V / 16A socket on basket
- Aerial section centring display for aerial part closing
- Air/water line from the column to the basket
- Anti-collision system Cab/boom
- Cage rotation 90°+ 90°
- Electric hour meter
- Inclinator with audio alarm signal and signal lights relating to aerial work conditions
- Painting with cathaphoresis process, with KTL system patented by PALFINGER
- Preparation for insulation upgrade ability
- Set of 4 spreader plates with proper housing on the chassis
- Top boom protection.

## MAIN ACCESSORIES

- 12V electric pump for emergency lowering
- 230V / 16A or 110V / 16A electric pump
- Automatic aerial section closure
- Brushes kit on telescopic boom
- Fibreglass basket instead of the standard aluminum version
- 1000V insulation on fibreglass basket
- Flashing light at turntable
- Folding left and right side bordering h 200 mm
- Plastic storage toolbox at the rear
- Side protection
- Wired remote control for emergency commands.






## DIMENSIONS



## TECHNICAL DATA

|                                                                                  |                                        |           |                                                                                   |                                  |                                                    |
|----------------------------------------------------------------------------------|----------------------------------------|-----------|-----------------------------------------------------------------------------------|----------------------------------|----------------------------------------------------|
|  | Max. working height                    | 19.8 m    |  | Basket dimensions                | 2x90°                                              |
|  | Max. working height from platform deck | 17.8 m    |  | Max. load permitted on basket    | m 1.4 x 0.84 x 1.1 h                               |
|  | Max. working outreach                  | 11.7 m    |  | Max. carico ammesso per cestello | 250 kg - 230 kg (FBG)                              |
|  | Min. outrigger width                   | 2.0 m     |  | Stabilization                    | Vertical, with front arms extendable hydraulically |
|  | Max. outrigger width                   | 3.1 m     |  | Gross vehicle weight             | 3.5 t                                              |
|  | Operating angle of main arm            | -21°/+80° |                                                                                   |                                  |                                                    |
|  | Turret rotation                        | 370°      |                                                                                   |                                  |                                                    |

## WORK AREA

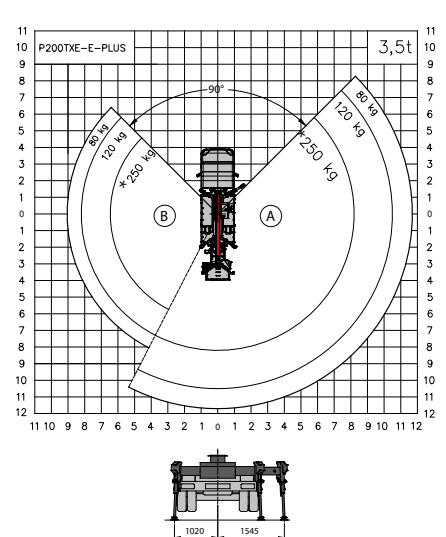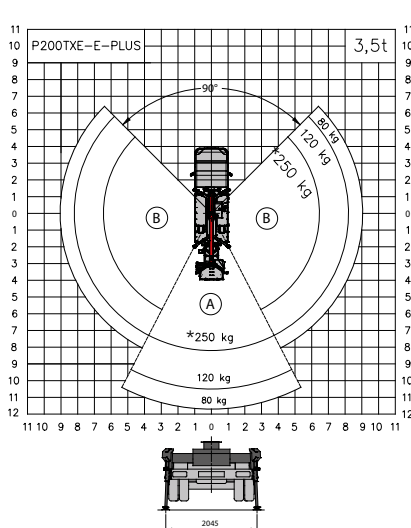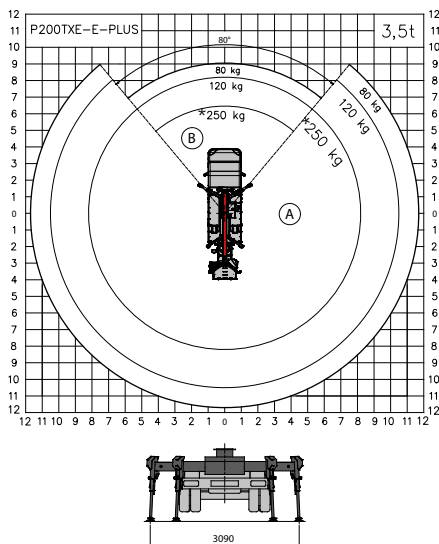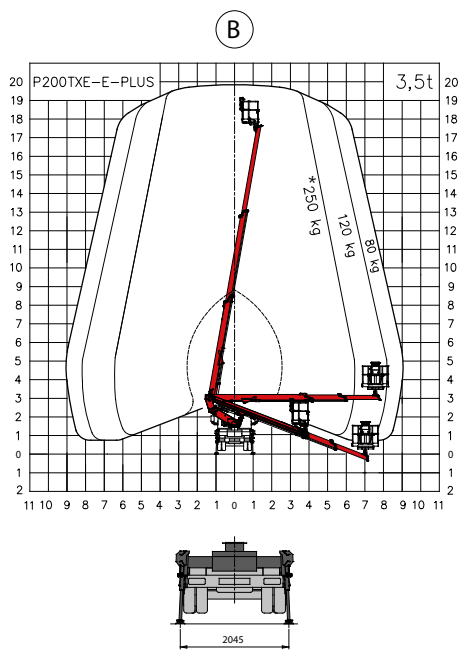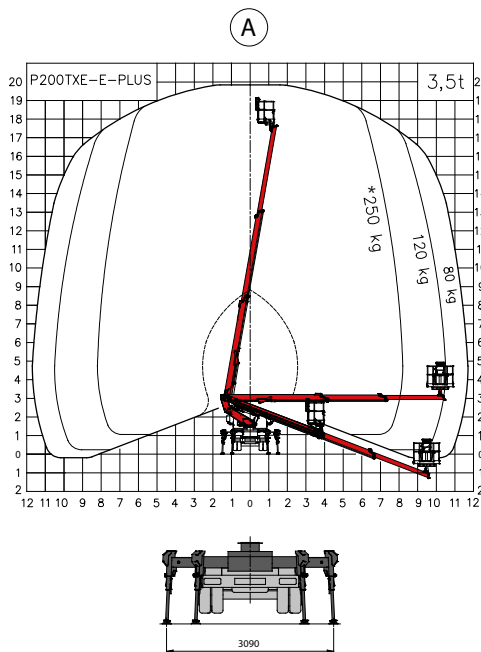

Weights may vary by +/- 5%  
 Technical data may vary by +/- 3%  
 \*230 kg for FBG basket

## CONTACT DETAILS

**PALFINGER PLATFORMS ITALY SRL**

Via Enrico De Nicola, 31  
41122 Modena (MO) - Italy  
TEL: +39 059 252426  
EMAIL: [info@palfingerplatformsitaly.it](mailto:info@palfingerplatformsitaly.it)

**KP-P200TXEPM1+EN**

The illustrations in the brochure may show units equipped with optional accessories and not always the standard version. National legislation must be complied with during construction/assembly. The dimensions stated are not binding. The company cannot be held responsible for any changes in technical information, inaccuracies, or translation errors.

**PALFINGER**

## **P 200 TXE-E SMART PLUS**

**MASSIMA PERFORMANCE  
DI SBRACCIO LATERALE E  
RIDOTTO INGOMBRO DI  
STABILIZZAZIONE**

**LIFETIME EXCELLENCE**



## PUNTI DI FORZA

- Piattaforma aerea telescopica con elevate prestazioni, installata su autocarro 3,5 t
- Comandi elettrici multifunzione per una maggiore precisione, rapidità e comfort di manovra
- Stabilizzazione verticale con traverse estendibili anteriormente per compensare meglio i dislivelli e le pendenze del terreno
- Piattaforma con tre possibilità di stabilizzazione per ogni condizione di lavoro:
  - In sagoma: per la massima compattezza degli ingombri in spazi ridotti
  - Con traverse anteriori sfilate: per massime prestazioni di lavoro in quota
  - Stabilizzazione parziale: per prestazioni massime con minimo ingombro.

## STANDARD

- Anticollisione cabina /braccio
- Cestello rotante idraulicamente 90° dx + 90° sx
- Contatore funzionamento macchina
- Cuffia protezione bocca-sfilo
- Inclinometro con allarme sonoro e luminoso su condizioni di lavoro aereo
- Linea aria/acqua dalla colonna al cestello
- Piastre ripartitrici allargate con relativi alloggi sul pianale
- Presa 12V sul cestello
- Presa elettrica 230V / 16A or 110V / 16A nel cesto
- Verniciatura in cataforesi, sistema KTL brevettato PALFINGER
- Visualizzatore centraggio parte aerea per chiusura macchina
- Predisposizione per l'isolamento.

## ACCESSORI PRINCIPALI

- Baule porta oggetti in plastica sottopianale
- Carenature laterali telaio
- Cestello in vetroresina in sostituzione dello standard in alluminio
- Chiusura automatica parte aerea
- Elettropompa 12V per la discesa d'emergenza
- Elettropompa 230V / 16A o 110V / 16A
- Filocomando per comandi d'emergenza
- Isolamento 1000V con cestello in vetroresina
- Rotolampada fisso - singolo o doppio - sulla torretta
- Spazzole protezione sfilo braccio
- Spondine ribaltabili su 2 lati h 200 mm.






## DIMENSIONI



## DATI TECNICI

|                                                                                  |                                               |           |                                                                                   |                                  |                                                        |
|----------------------------------------------------------------------------------|-----------------------------------------------|-----------|-----------------------------------------------------------------------------------|----------------------------------|--------------------------------------------------------|
|  | Max. altezza di lavoro                        | 19,8 m    |  | Rotazione cestello               | 2x90°                                                  |
|  | Max. altezza di lavoro dal piano di calpestio | 17,8 m    |  | Dimensioni del cestello          | m 1,4 x 0,84 x 1,1 h                                   |
|  | Sbraccio max. di lavoro                       | 11,7 m    |  | Max. carico ammesso per cestello | 250 kg - 230 kg VTR                                    |
|  | Larghezza min. stabilizzatori                 | 2,0 m     |  | Stabilizzazione                  | Verticale, bracci anteriori estendibili idraulicamente |
|  | Larghezza max. stabilizzatori                 | 3,1 m     |                                                                                   |                                  |                                                        |
|  | Angolo operativo del braccio principale       | -21°/+80° |  | Massa complessiva veicolo        | 3,5 t                                                  |
|  | Rotazione Torretta                            | 370°      |                                                                                   |                                  |                                                        |

## DIAGRAMMI DI LAVORO

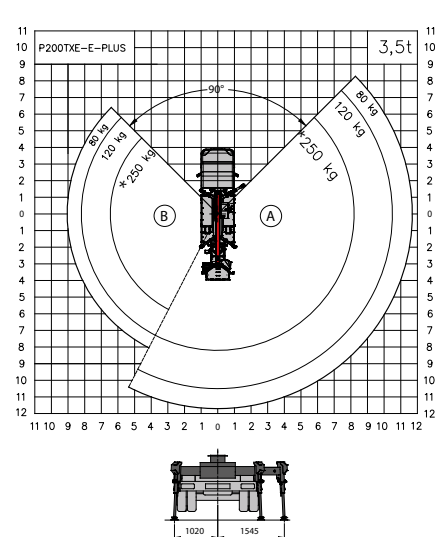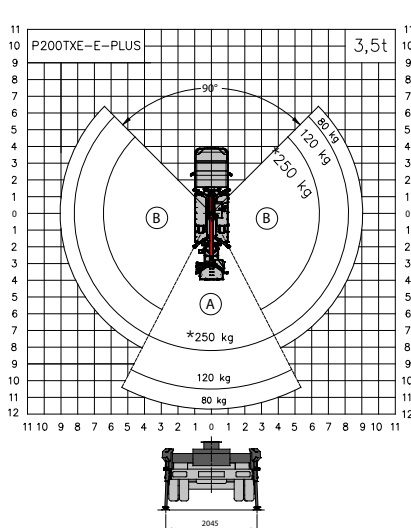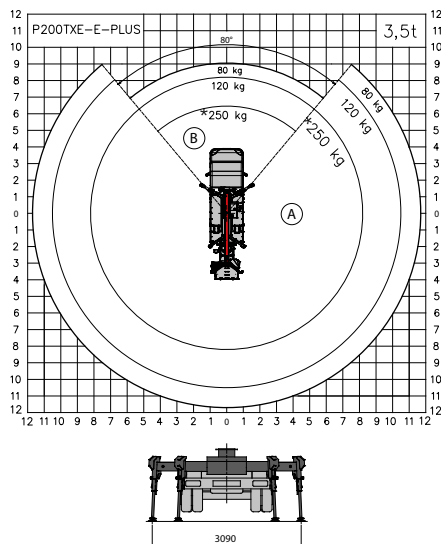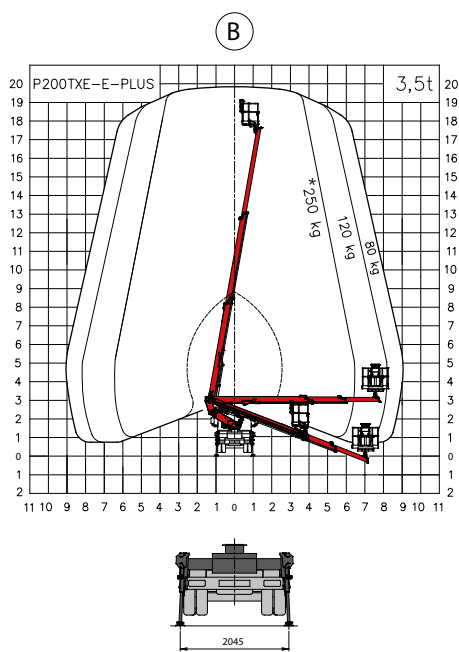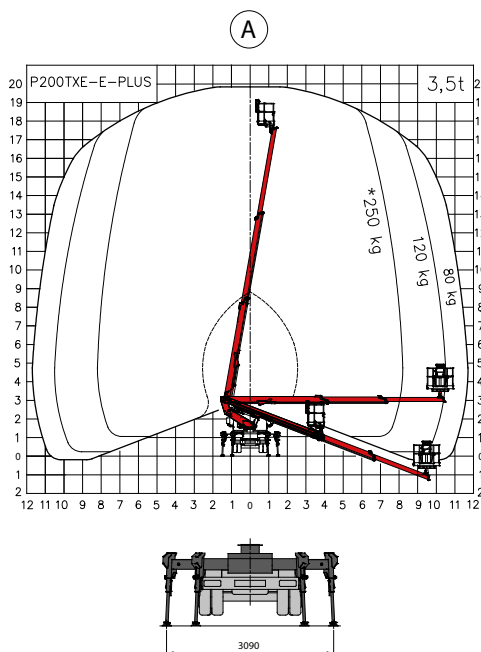

Masse suscettibili ad una variazione +/- 5%  
 Dati tecnici suscettibili ad una variazione +/- 3%  
 \*230 kg con il cestello in VTR

## CONTATTO

### **PALFINGER PLATFORMS ITALY SRL**

Via Enrico De Nicola, 31  
41122 Modena (MO) - Italy  
TEL: +39 059 252426  
EMAIL: [info@palfingerplatformsitaly.it](mailto:info@palfingerplatformsitaly.it)

**KP-P200TXEPM1+IT**

Le unità mostrate nell'opuscolo possono essere equipaggiate con accessori opzionali e non sempre corrispondono alla versione di serie. Nella costruzione è necessario rispettare le normative nazionali. Le dimensioni indicate non sono vincolanti. Con riserva di modifiche tecniche, errori ed errori di traduzione.

**PALFINGER.COM**