

MERCEDES

P 220 BK

BENZ SPRINTER 315 CDI 4X2

CONTRACT NUMBER: P220BK STANDARD

NEW

ON STOCK


AVAILABLE NOW



SPECIFICATION

OFFER INFORMATION

Location details

Löbau, 02708 - Germany 

Dealer Name

Palfinger Platforms GmbH

Product type

New

Contract number

P220BK Standard

Dealer E-mail

sales.platforms@palfinger.com

Dealer phone

004935854796121

- 4 Safety-Spreader plates incl. bracket on the platform covering
- Covers made of aluminium chequer plate
- Home-Function
- Operator control panel in cage (optional display possible)
- Stabilizer control panel at the base
- Automatic stabilizer levelling system
- Three stabiliser configurations: jacking within vehicle width, wide jacking and one-side wide jacking and automatic release of the related workspace
- 1x user manual, signs, display language (if display is present) in country specific language
- 230V/10A CEE-socket incl. supply with residual current circuit breaker at the base
- 230V CEE-socket at cage
- Additional CEE-socket supplied by on-board voltage
- Cleaning hatch at cage
- Self-closing door for upright entrance to the cage
- 2 anchor points for safety harnesses
- PALDiag for system analysis, integrated in platforms software

Painted in MB9147 arctic white

PRODUCT

| | | | |
|---------------------|-----------|-----------------------|----------------------|
| Manufacturer | PALFINGER | Basket size | 1,40 x 0,70 x 1,10 m |
| Model | P 220 BK | Basket capacity | 300 kg |
| Construction year | NEU - NEW | Basket turning device | +/- 90° |
| Outreach | 16,9 m | Basket arm angle | 185° |
| Max. height of work | 22,0 m | Basket material | Aluminium |
| Turret rotation | 500° | | |

TRUCK

| | | | |
|--------------------|------------------|----------------------|-----------------|
| Truck manufacturer | Mercedes Benz | Power | 110 kW (150 PS) |
| Vehicle type | Sprinter 315 CDI | Emmission standard | EURO 6 |
| Construction year | NEU - NEW | Axes | 4x2 |
| Wheel base | 3.665 mm | Gross vehicle weight | 3.500 kg |

PALFINGER

P 220 BK

AGILE AND COMPACT

LIFETIME EXCELLENCE

PALFINGER P 220 BK

HIGHLIGHTS

- Stabiliser operation from the base for easy and safe support
- Robust aluminium workman basket with 3000 kg cage load and integrated anti-squeeze protection function in the knee rail
- Automatic support stabilising with wheel clearance monitoring
- Flat substructure under the workman basket allows users to get as close to obstacles as possible
- Full range with vertical support on large chassis (7.5t)

STANDARDS














- Home function
- Automated positioning system
- Safety plates
- 230V CEE current supply with CEE socket in the workman basket
- European type approval
- Stabiliser control at basis

OPTIONS

- Tree maintenance package (tree basket, wooden edge, protective roof, chainsaw mount)
- Protective grating above cab
- Display at the base, including height limitation
- Display in the workman basket, including adjustment of ramps
- Aluminium edging
- Dual insulation with plastic basket




TECHNICAL SPECIFICATIONS

| | | | | | |
|---|------------------------------|---------|---|-----------------------------|----------------------|
|  | Total weight * | 3330 kg |  | max. outreach | 16.90 m |
|  | Overall length | 7.40 m |  | Rotation angle of turntable | 500° |
|  | Width in transport position | 2.22 m |  | Rotation angle of cage | 2 x 90° |
|  | Height in transport position | 2.99 m |  | Rotation angle of cage boom | 185° |
|  | max. stabiliser width | 3.60 m |  | Size of cage | 1.40 x 0.70 x 1.10 m |
|  | max. working height | 22 m |  | max. cage load | 300 kg |
|  | max. cage bottom height | 20 m | | | |


* Depends on truck chassis

WORKING DIAGRAMS

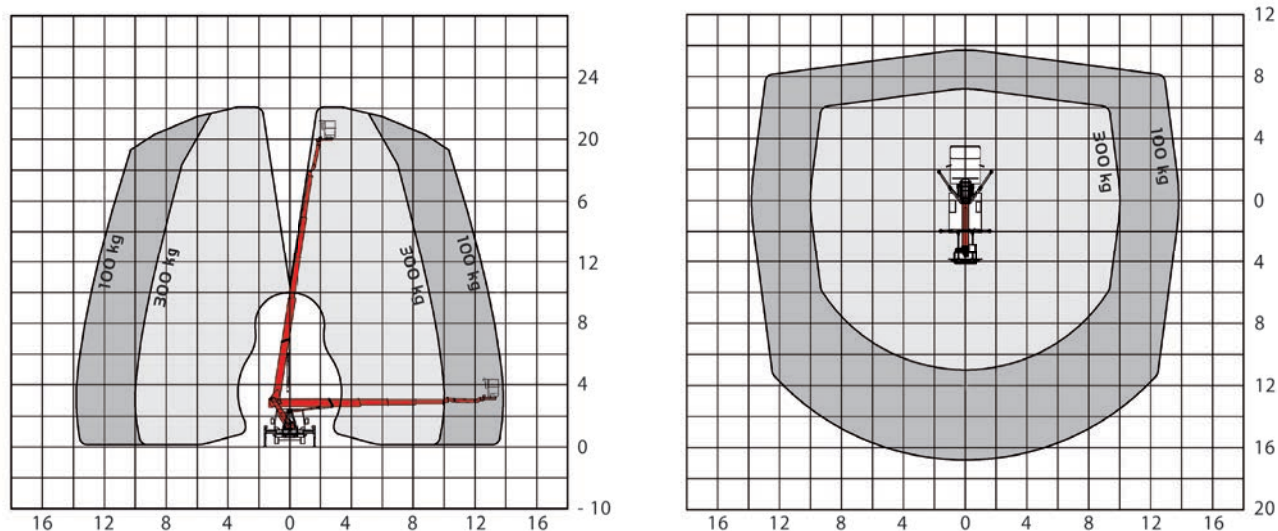

A possible 2% tolerance is contingent on structural component

DIMENSIONS

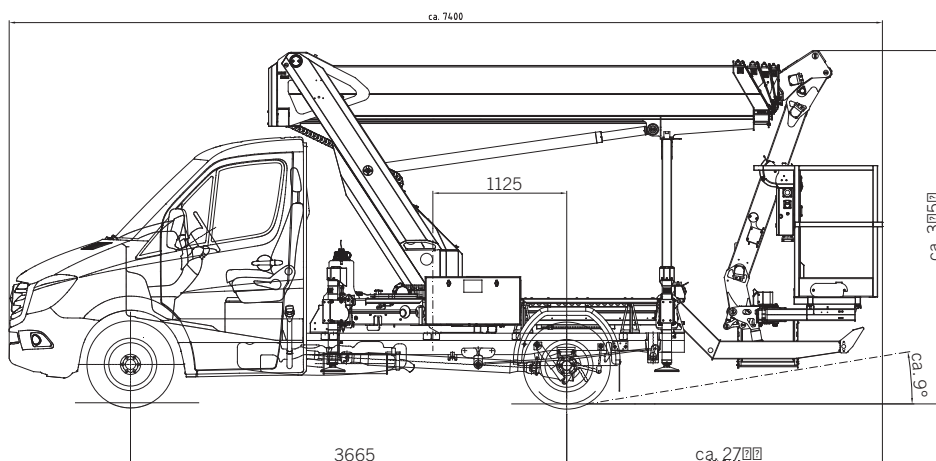

YOUR CONTACT

Palfinger Platforms GmbH
Düsseldorfer Str. 100
47809 Krefeld | Germany

KP-P220BKM1+EN

Units shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.