

MAN

**P 480**

**4X4**

NEW

AVAILABLE



## SPECIFICATION

## EQUIPMENT

- Greater flexibility thanks to 240° X-jib
- 2 x 200° rotation for perfect positioning of the workman basket
- Telescopic upper boom up to 17 m length
- 1000 mm stabilising stroke to compensate highly uneven terrain
- Telescopic basket with 600 kg basket load and integrated mount for Powerlift system
- Hanging basket enables users to get close to objects
- Reverse camera
- Home function
- Automated positioning system
- Telescopic cage
- Safety plates
- 230 V CEE current supply with CEE socket in the workman cage

## OFFER INFORMATION

Location details

Modena, 41122 - Italy 

Dealer Name

Palfinger srl

Availability

Available

Product type

New

Dealer E-mail

[sales-it@palfinger.com](mailto:sales-it@palfinger.com)

[v.dalcamo@palfinger.com](mailto:v.dalcamo@palfinger.com)

Dealer phone

**0039059252426**

- Easy access through integrated stairs to platform
- Oil cooler to maintain the optimum operating temperature
- Secondary control at the turntable
- Intercom
- Working flashing lights
- Cage collision prevention system
- Hydraulic generator min 6.6kVA / 400V
- Seats in the cage
- Side protection
- Powerlift system
- High pressure air line
- Anemometer
- Attachable cable winch under the workman basket with 460kg lifting capacity
- Winch load 460 kg
- lifting hook load 900 kg
- Roof at the control workstation

PRODUCT

|                     |           |                       |                      |
|---------------------|-----------|-----------------------|----------------------|
| Manufacturer        | Palfinger | Turret rotation       | 540°                 |
| Model               | P 480     | Basket size           | 3,81 x 1,05 x 1,10 m |
| Construction year   | 2025      | Basket capacity       | 600 kg               |
| Outreach            | 31 m      | Basket turning device | 2 x 200°             |
| Max. height of work | 48 m      | Basket arm angle      | 200°                 |
|                     |           | Basket material       | Aluminum             |

TRUCK

|                    |         |                      |                 |
|--------------------|---------|----------------------|-----------------|
| Truck manufacturer | MAN     | Power                | 213 kW / 290 PS |
| Drivers cabine     | C       | Emmission standard   | EURO 6          |
| Wheel base         | 4800 mm | Axes                 | 4x4             |
|                    |         | Gross vehicle weight | 18.000 kg       |

# Working diagrams

## Palfinger P 480 *Jumbo - NX*

on

MAN TGM 18.XXX / DAF CF 300 FA 4x2

The working diagrams shown below have the following preconditions:

**Solid line:**

Standard working diagram

Working height = height of basket bottom + 2.0 m

The basket is in basic position (not turned) and retracted

**Dashed line:**

Maximum working diagram

Working height = height of basket bottom + 2.0 m

Workman basket turned into optimum position and extended

**The following applies generally:**

All specifications refer to standard aluminum basket

Special baskets have different ranges

Maximum inclination 0,5°

Set-up inclination is max. 2° with automatic range adjustment.

Deviations up to 2% possible due to component.

All dimensions are approximates.

Additional options might cause the outreach to be shorter.

The outreaches are approximate dimensions and depend on the chassis, the type of support and the lifting platform's additional equipment.

Illustrations of truck and unit are only of symbolic nature and do not allow any conclusions regarding technical design.


Subject to technical change!

# Palfinger P 480

## Rear view

Extension of stabiliser  
outrigger

|             |      |
|-------------|------|
| Front left  | 100% |
| Front right | 100% |
| Rear left   | 100% |
| Rear right  | 100% |

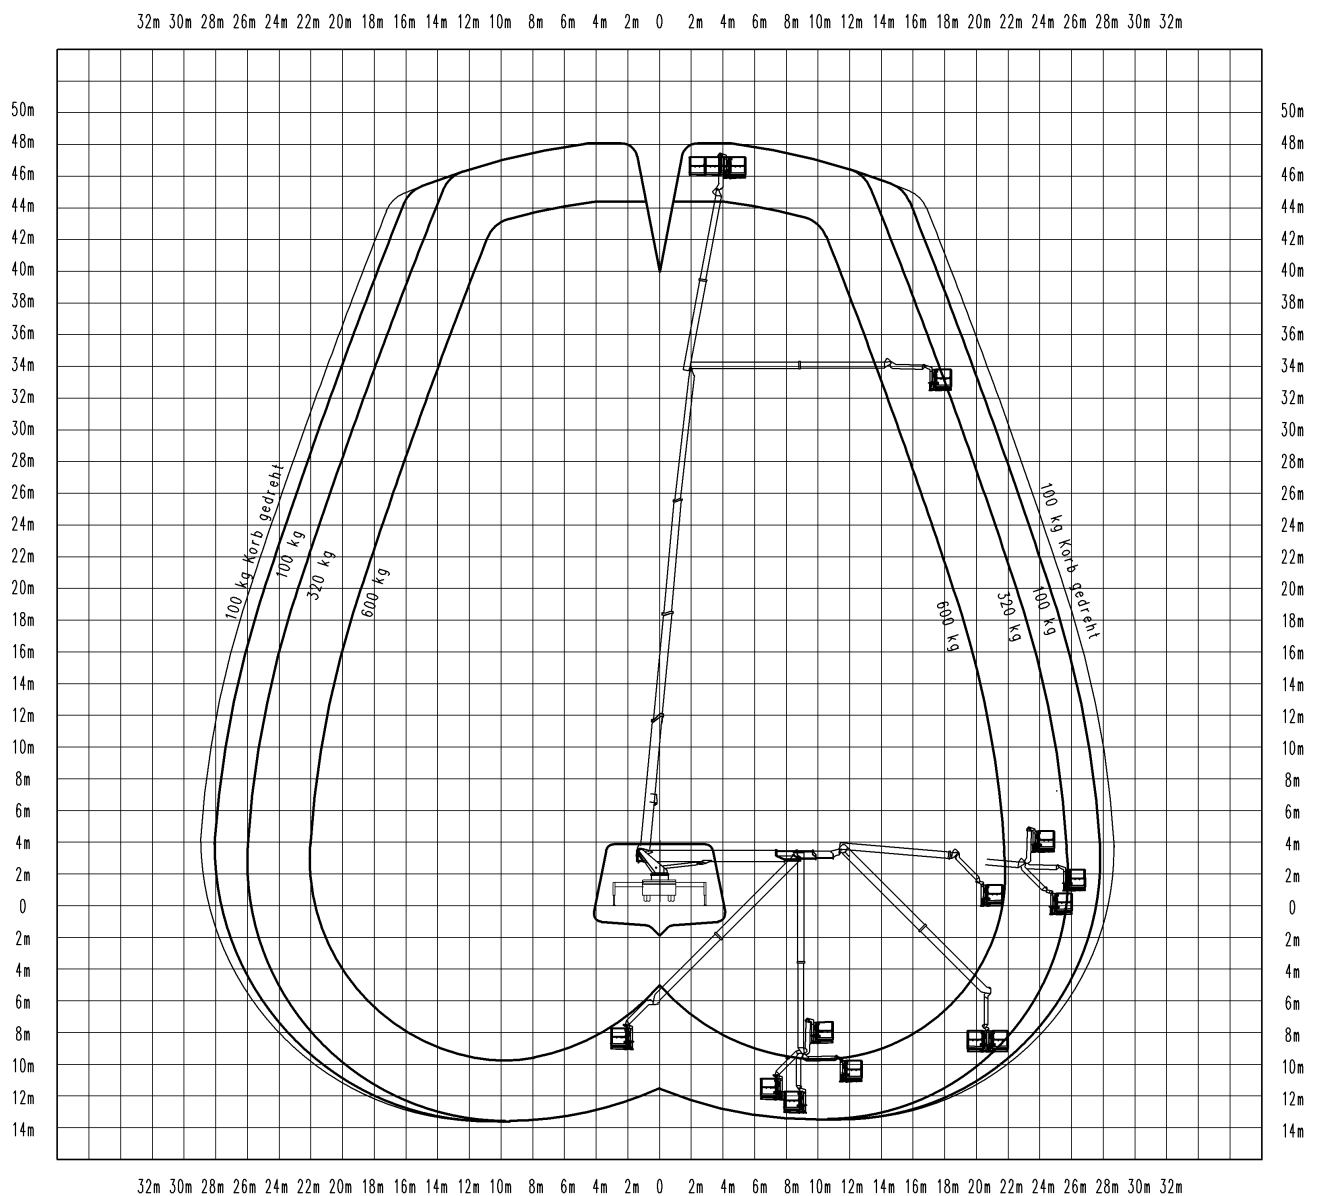


# Palfinger P 480

## Top view

Extension of stabiliser  
outrigger

|             |      |
|-------------|------|
| Front left  | 100% |
| Front right | 100% |
| Rear left   | 100% |
| Rear right  | 100% |

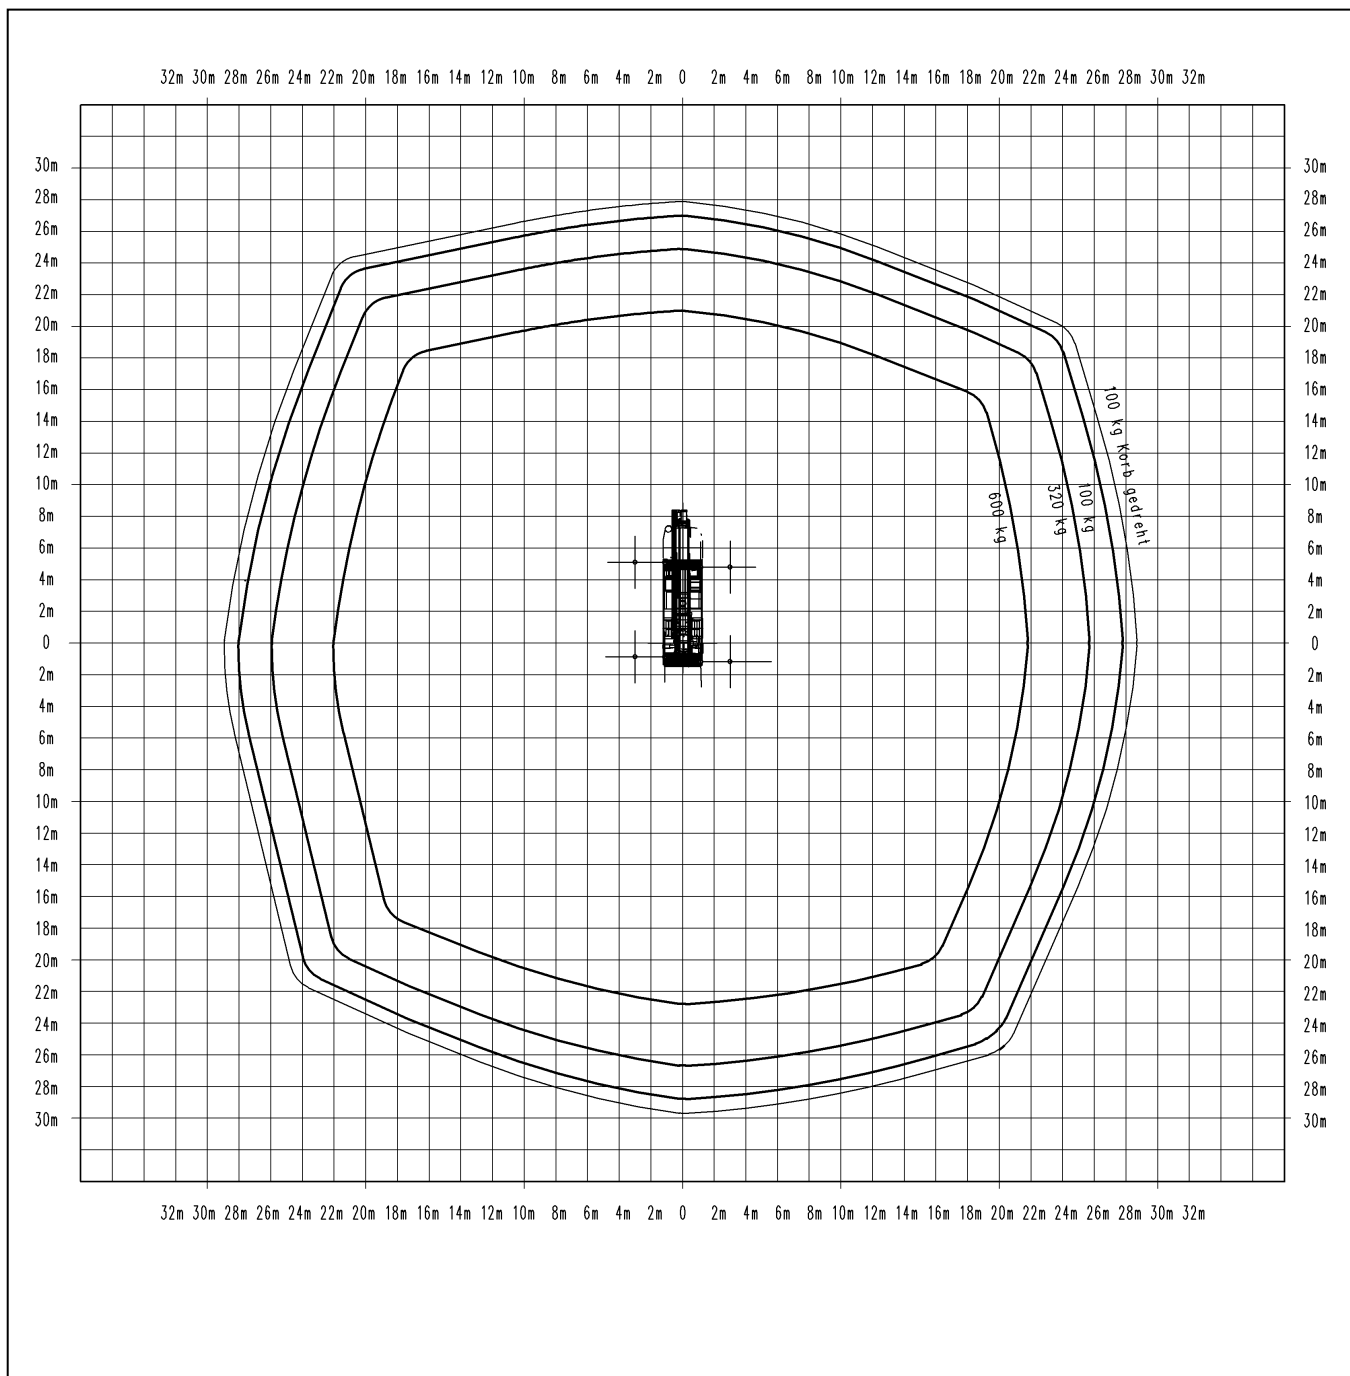


# Palfinger P 480

## Left view

Extension of stabiliser  
outrigger

|             |      |
|-------------|------|
| Front left  | 100% |
| Front right | 100% |
| Rear left   | 100% |
| Rear right  | 100% |

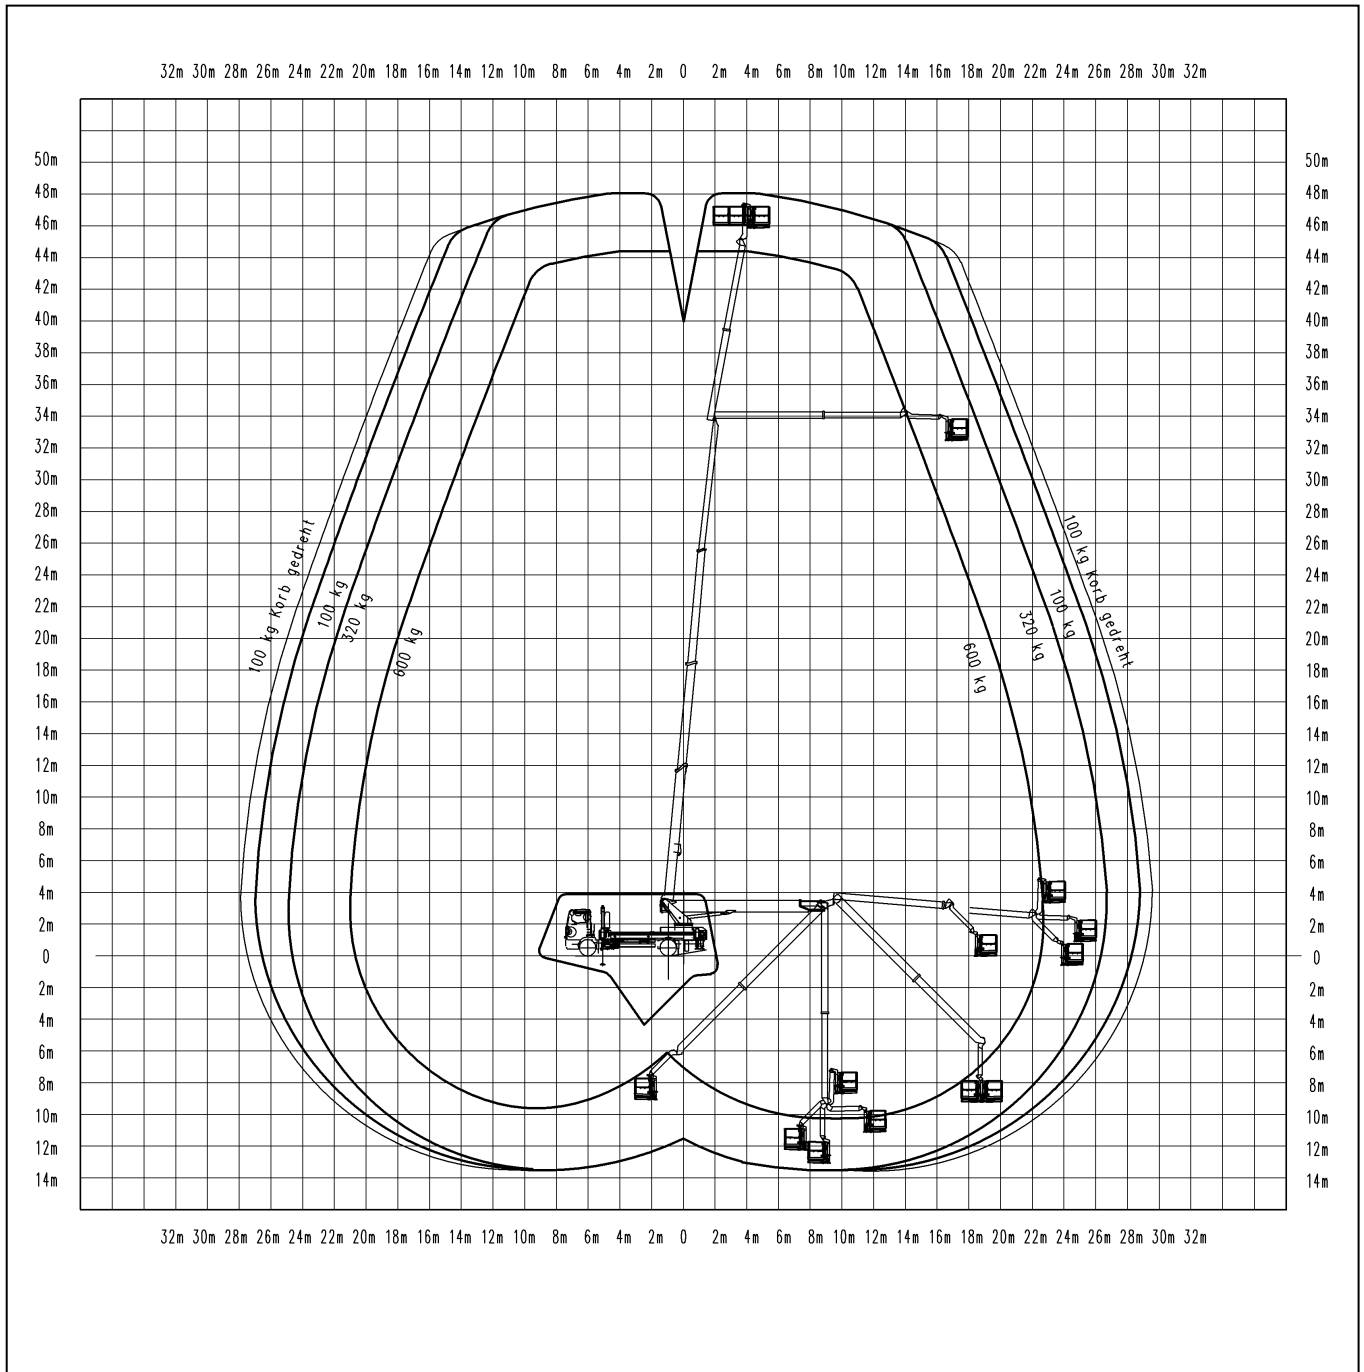


# Palfinger P 480

## Rear view

Extension of stabiliser  
outrigger

|             |     |
|-------------|-----|
| Front left  | 50% |
| Front right | 50% |
| Rear left   | 50% |
| Rear right  | 50% |

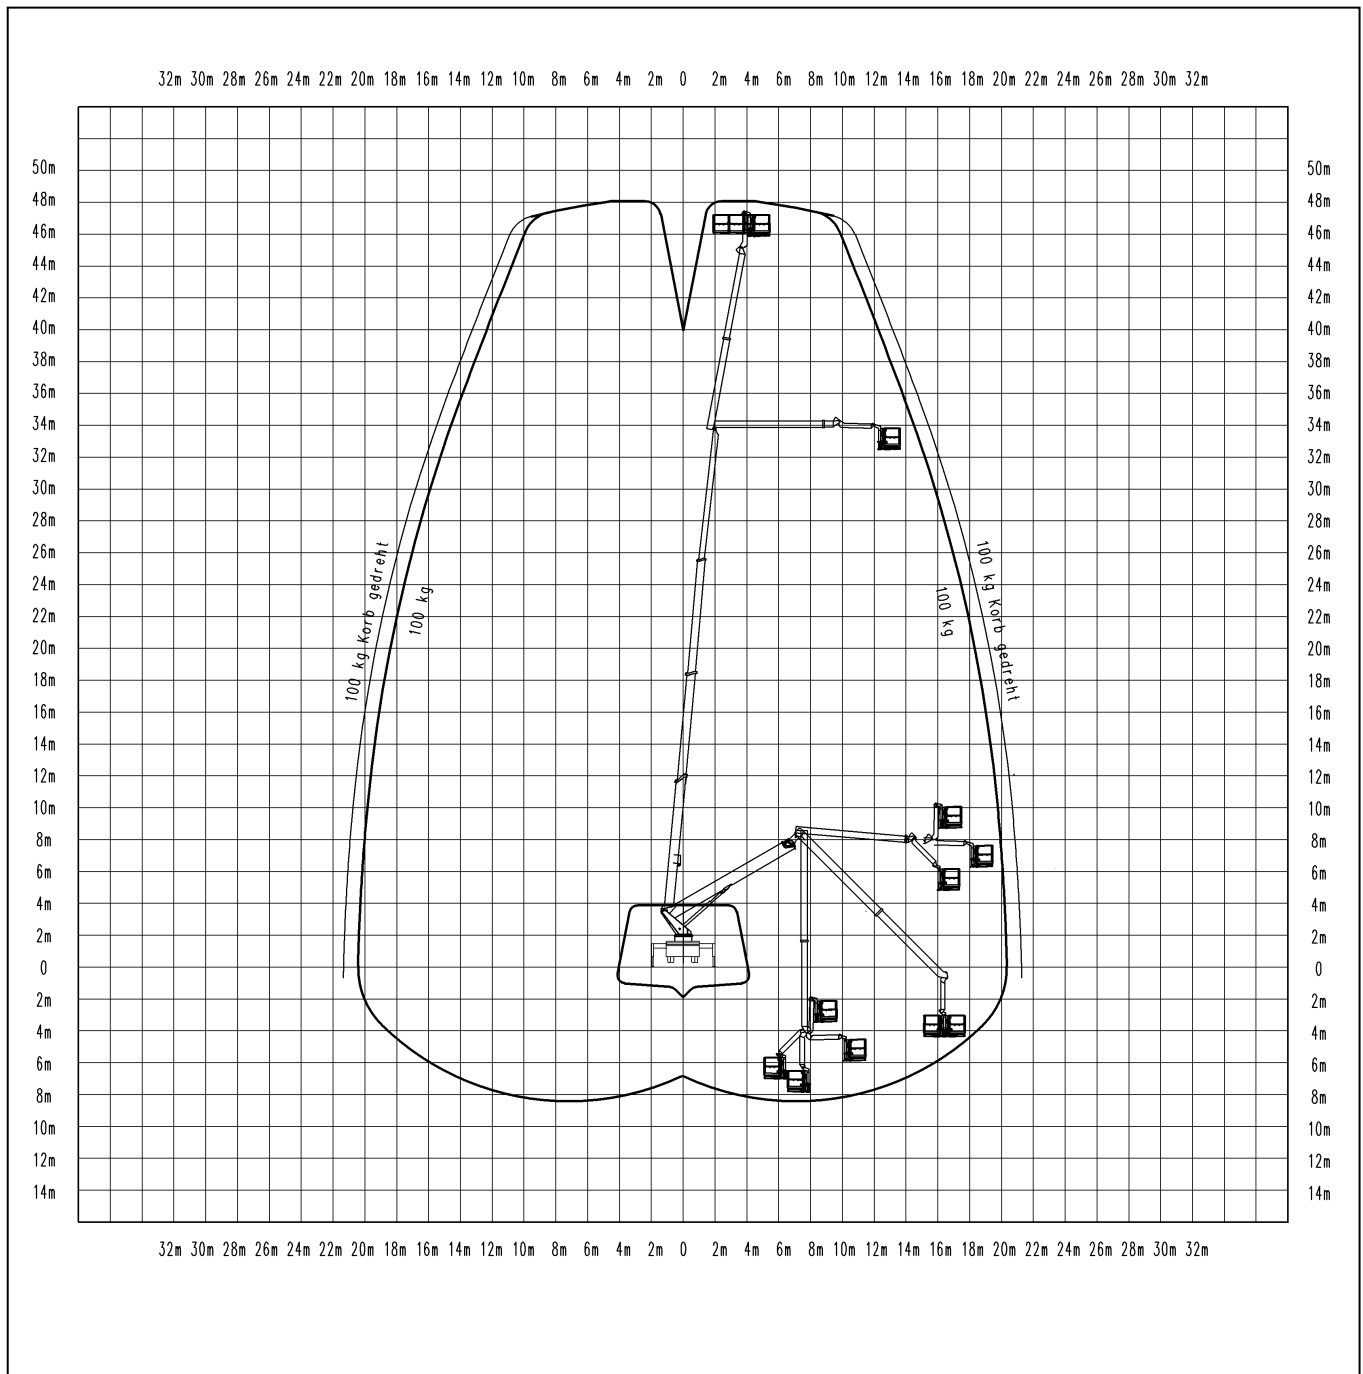


# Palfinger P 480

## Top view

Extension of stabiliser  
outrigger

|             |     |
|-------------|-----|
| Front left  | 50% |
| Front right | 50% |
| Rear left   | 50% |
| Rear right  | 50% |

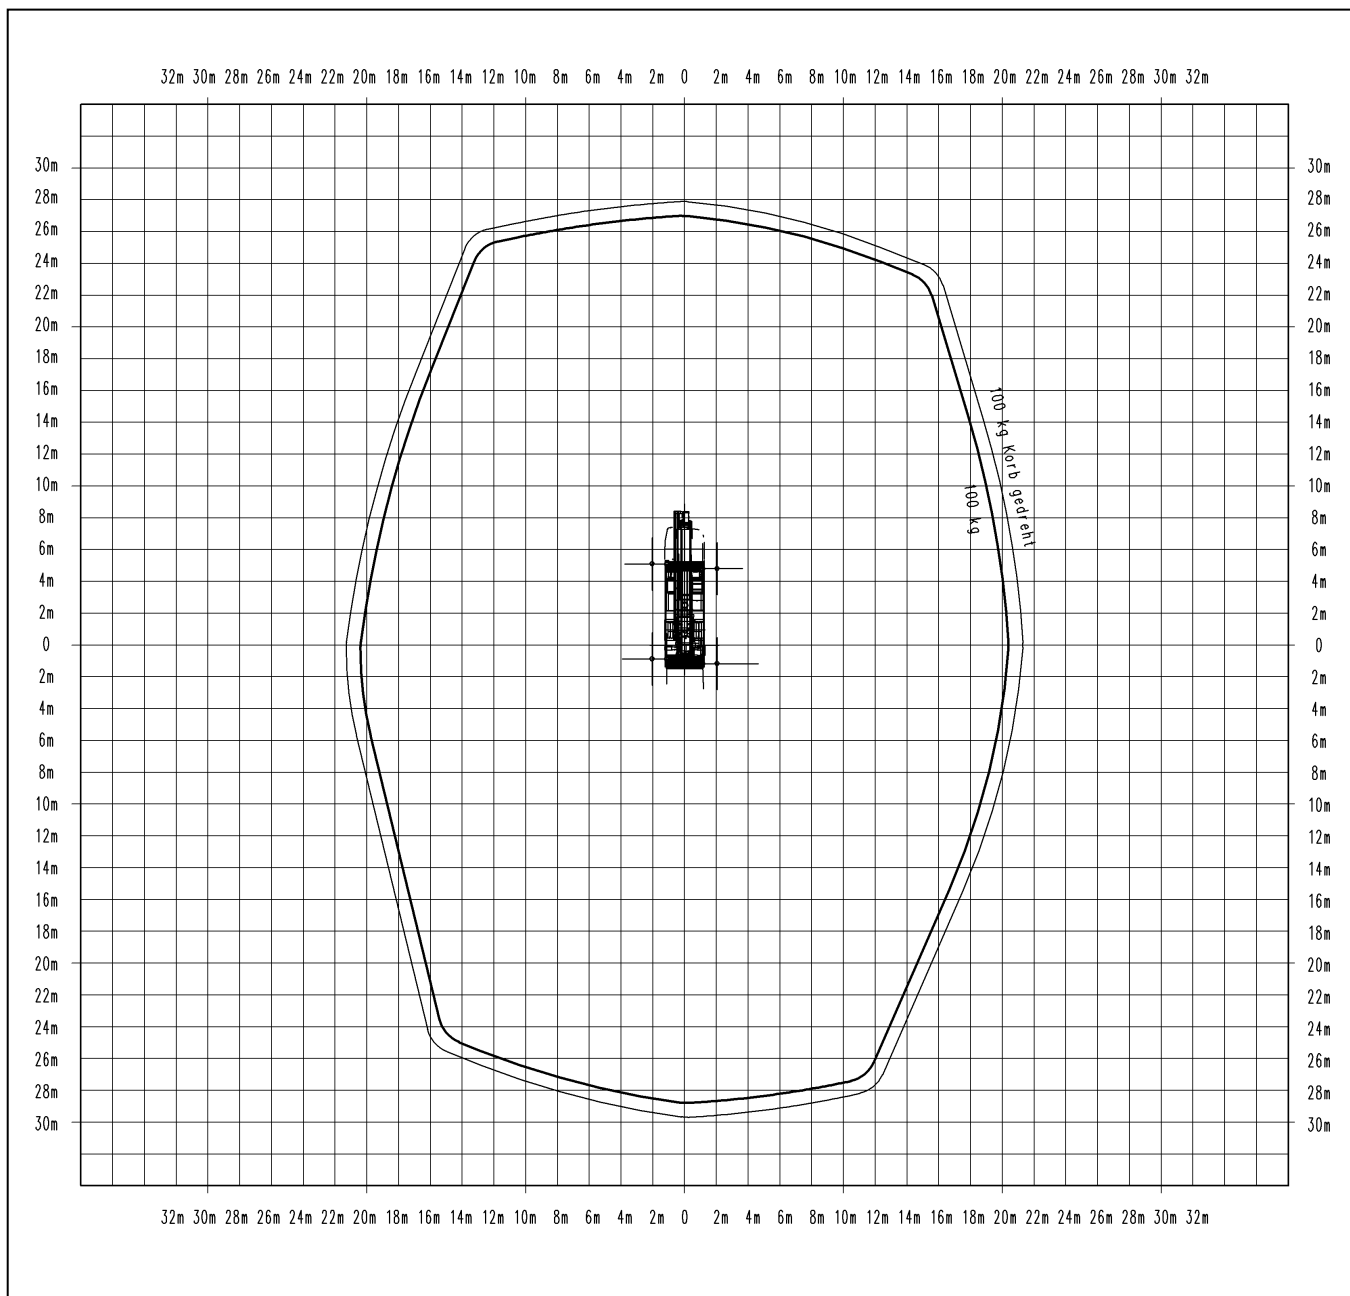


# Palfinger P 480

## Left view

Extension of stabiliser  
outrigger

|             |     |
|-------------|-----|
| Front left  | 50% |
| Front right | 50% |
| Rear left   | 50% |
| Rear right  | 50% |

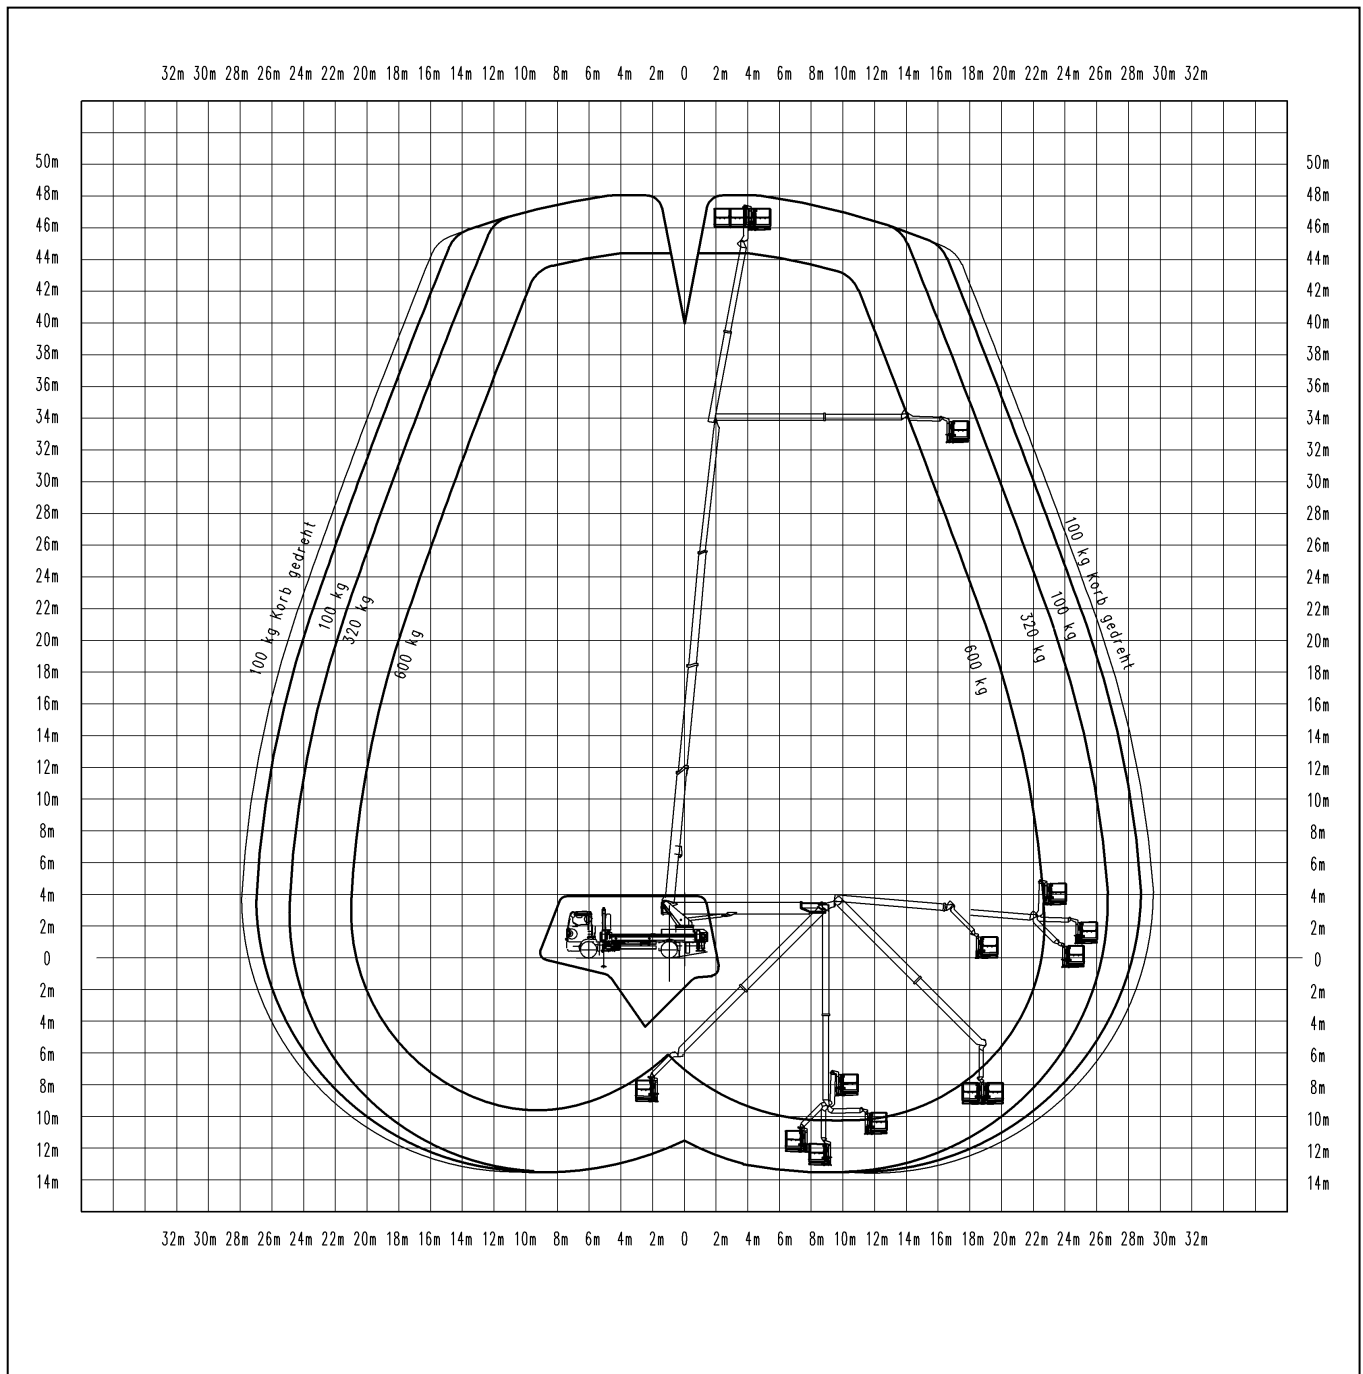


# Palfinger P 480

## Rear view

Extension of stabiliser  
outrigger

|             |    |
|-------------|----|
| Front left  | 0% |
| Front right | 0% |
| Rear left   | 0% |
| Rear right  | 0% |

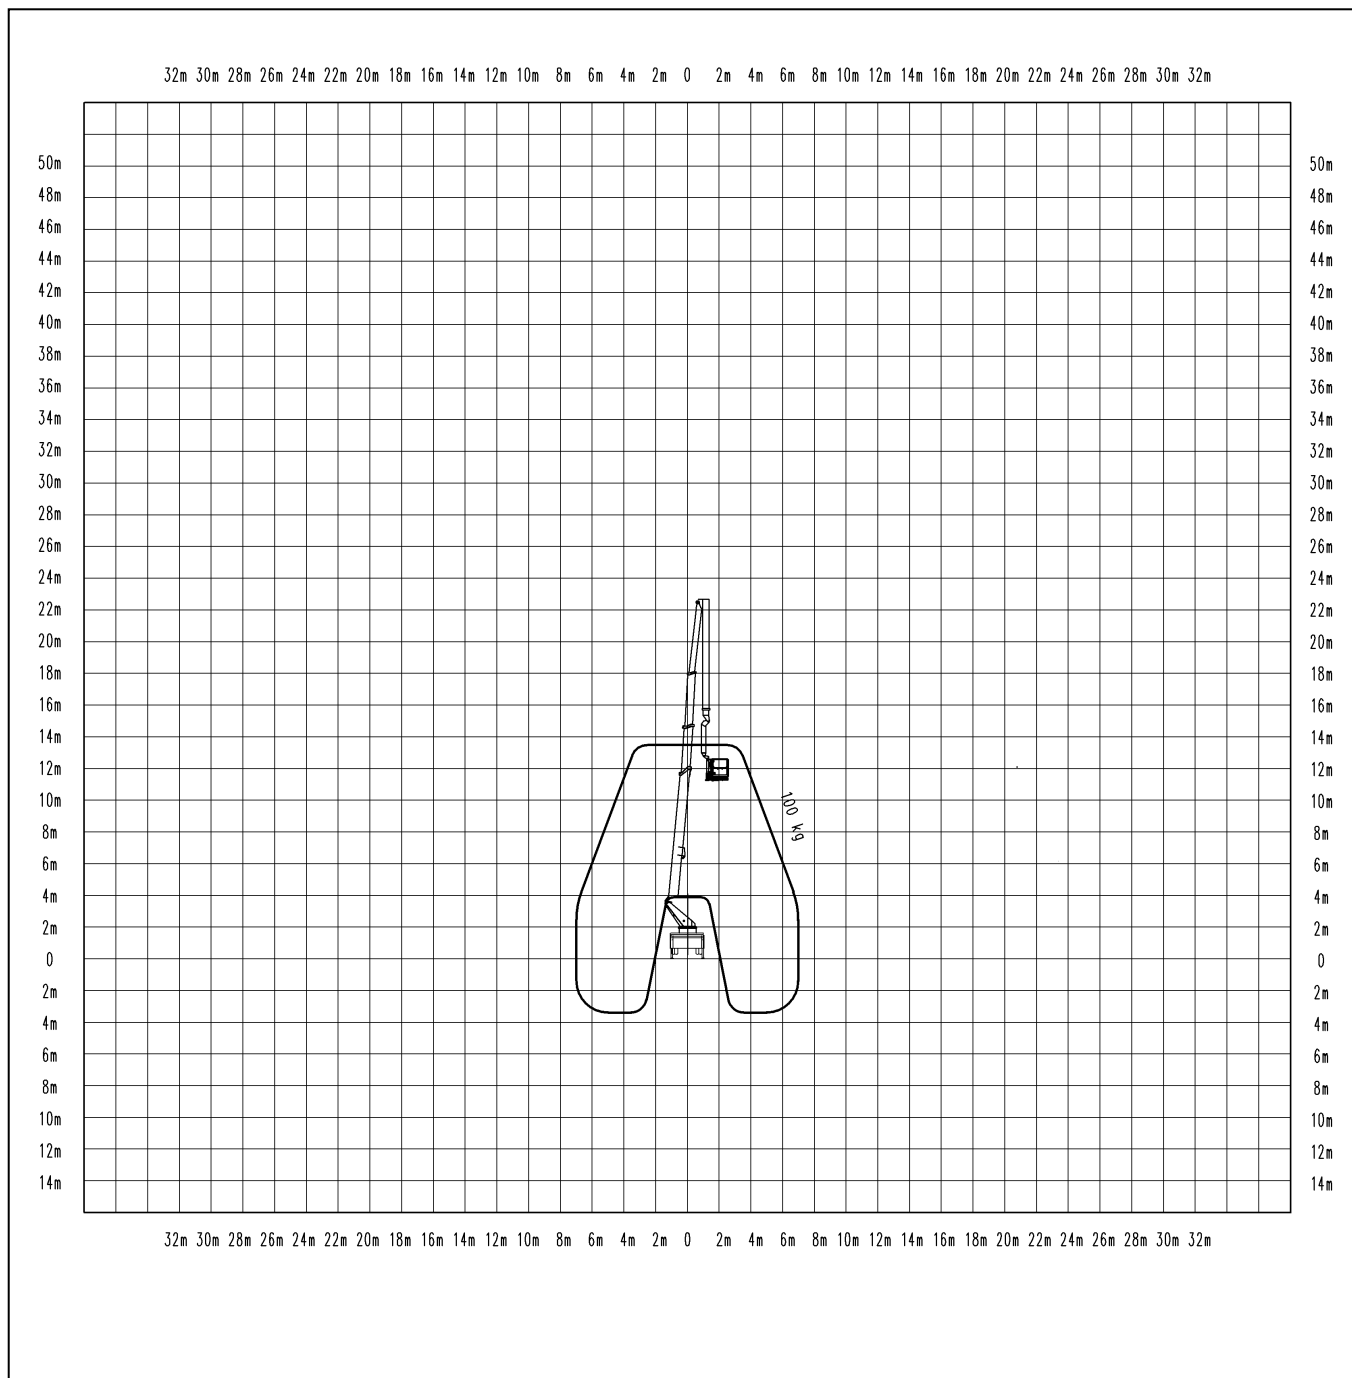


# Palfinger P 480

## Top view

Extension of stabiliser  
outrigger

|             |    |
|-------------|----|
| Front left  | 0% |
| Front right | 0% |
| Rear left   | 0% |
| Rear right  | 0% |

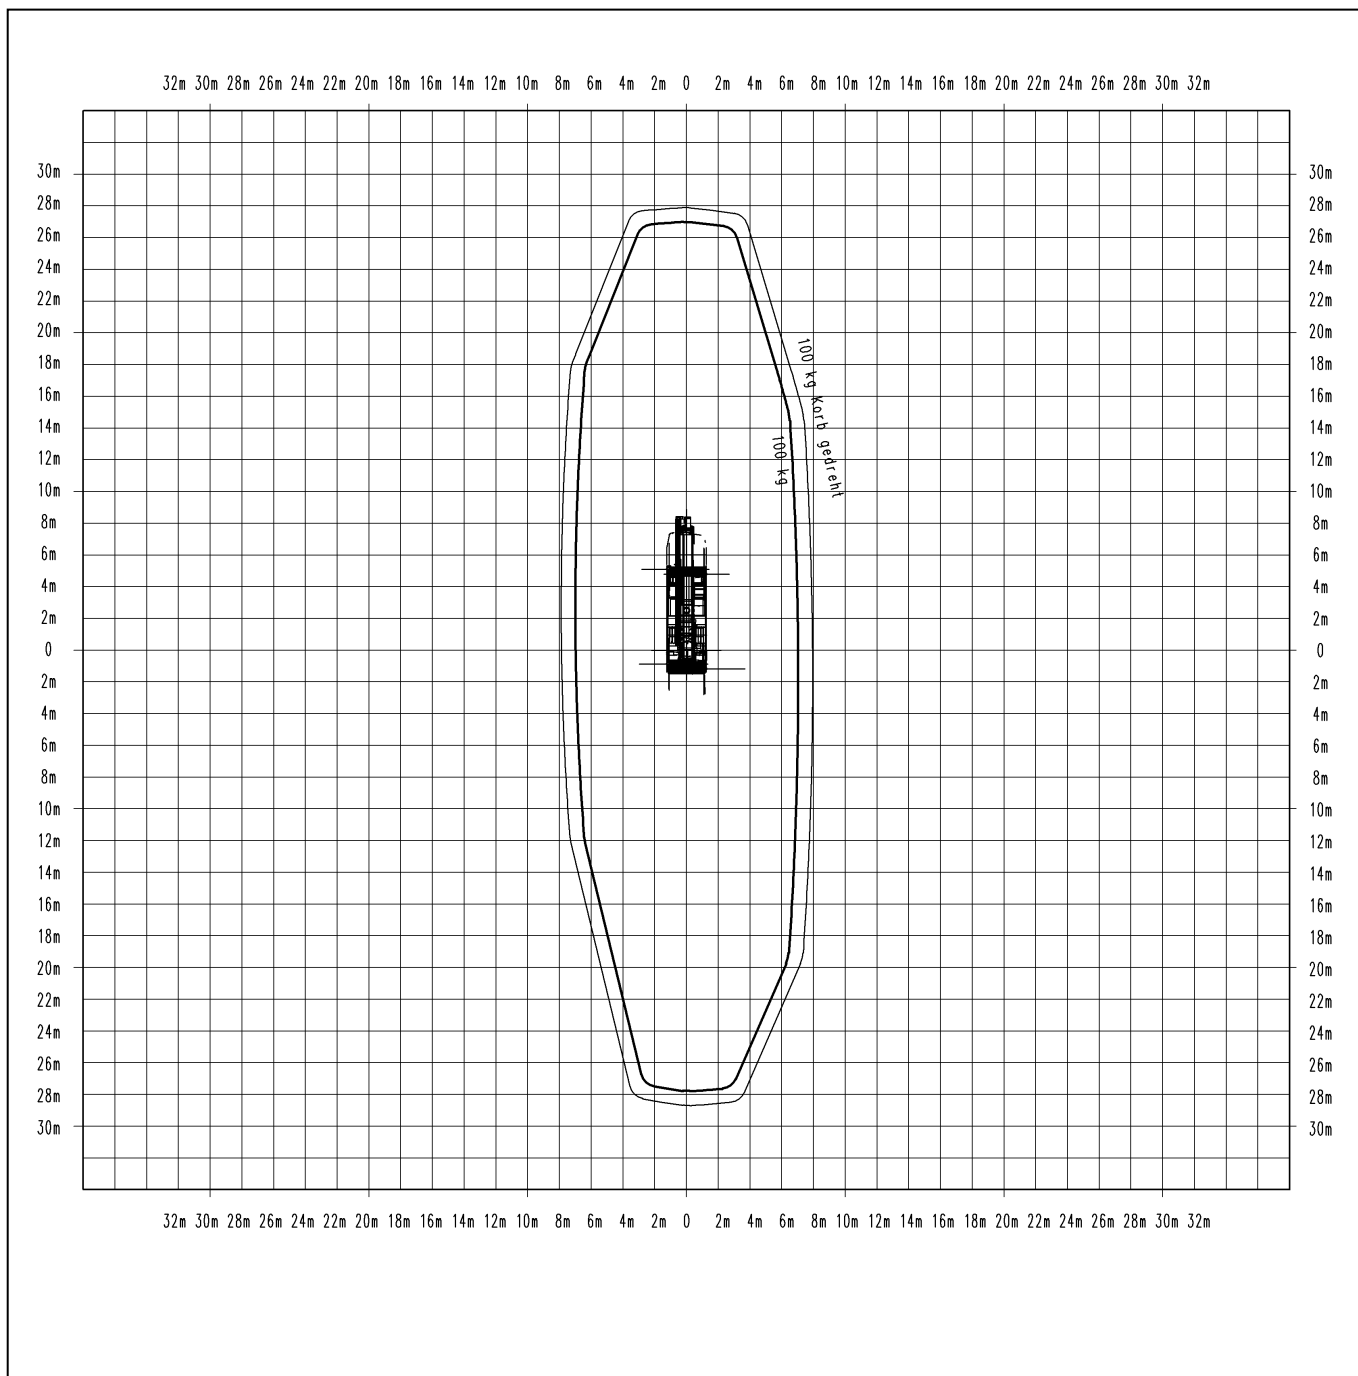


# Palfinger P 480

## Left view

Extension of stabiliser  
outrigger


|             |    |
|-------------|----|
| Front left  | 0% |
| Front right | 0% |
| Rear left   | 0% |
| Rear right  | 0% |

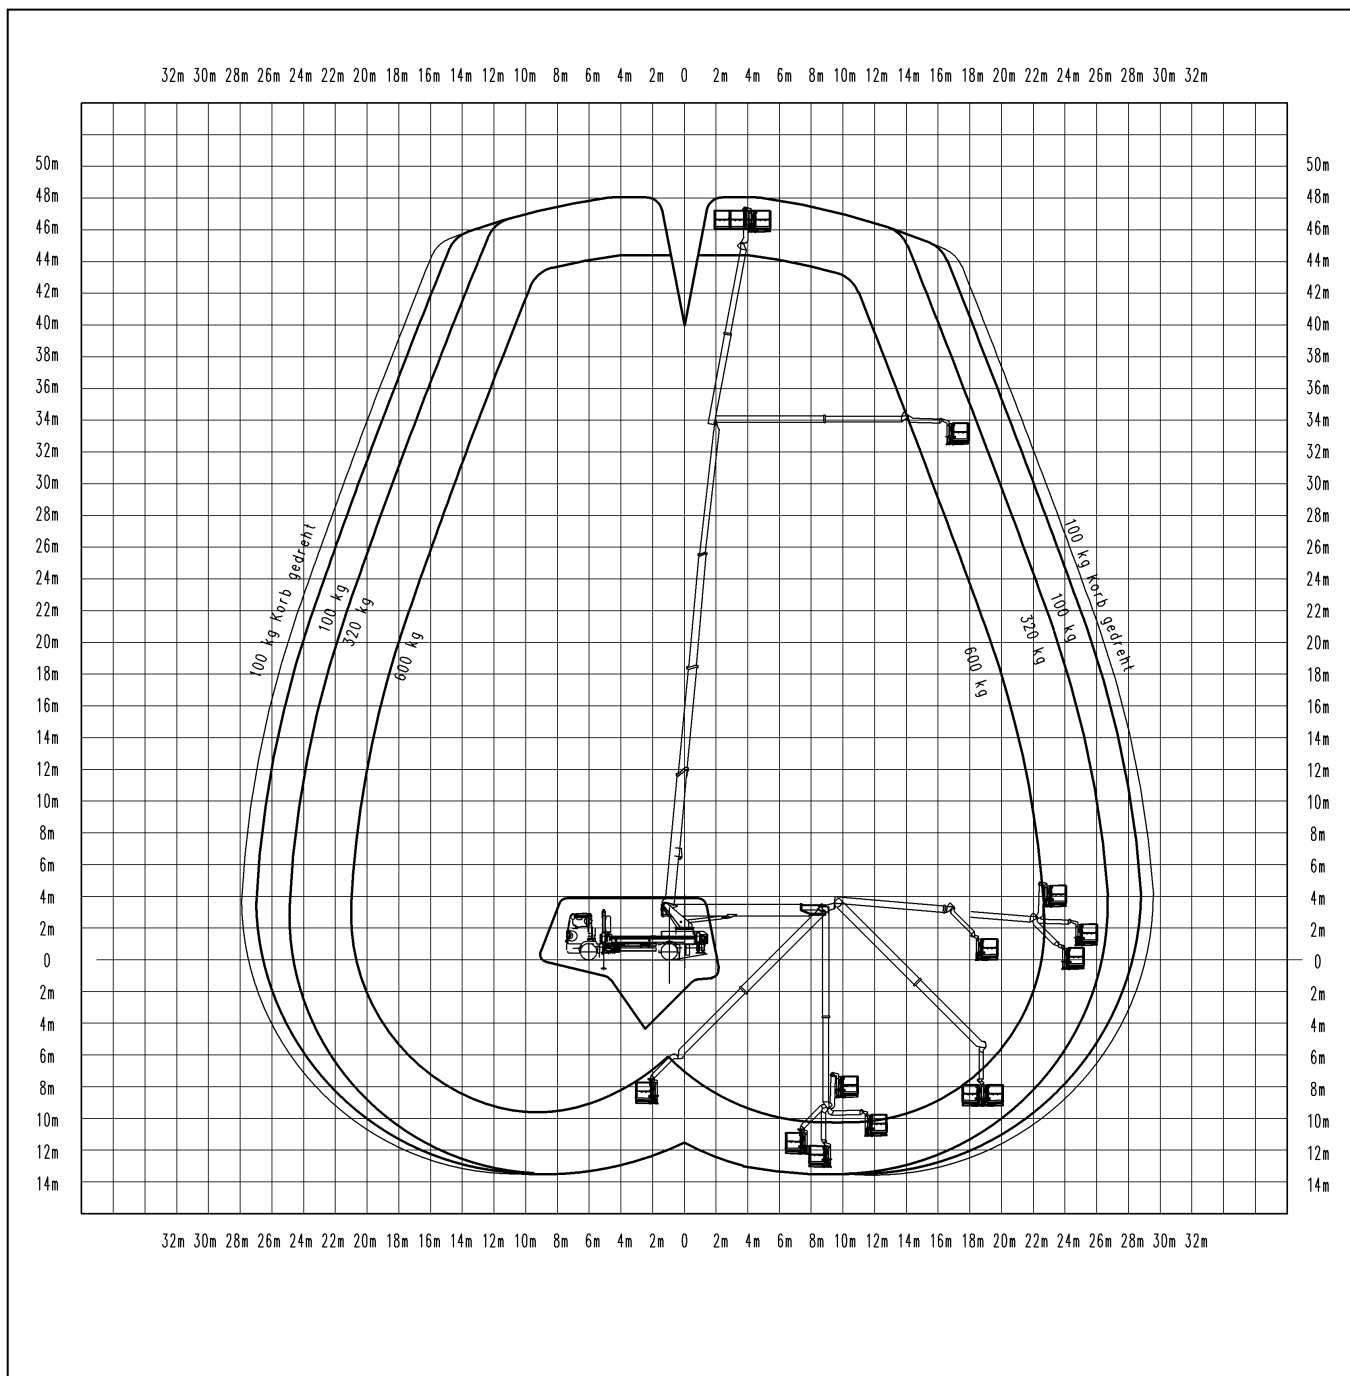

**P 480**

# **HIGH-LEVEL PRECISION**

**LIFETIME EXCELLENCE**

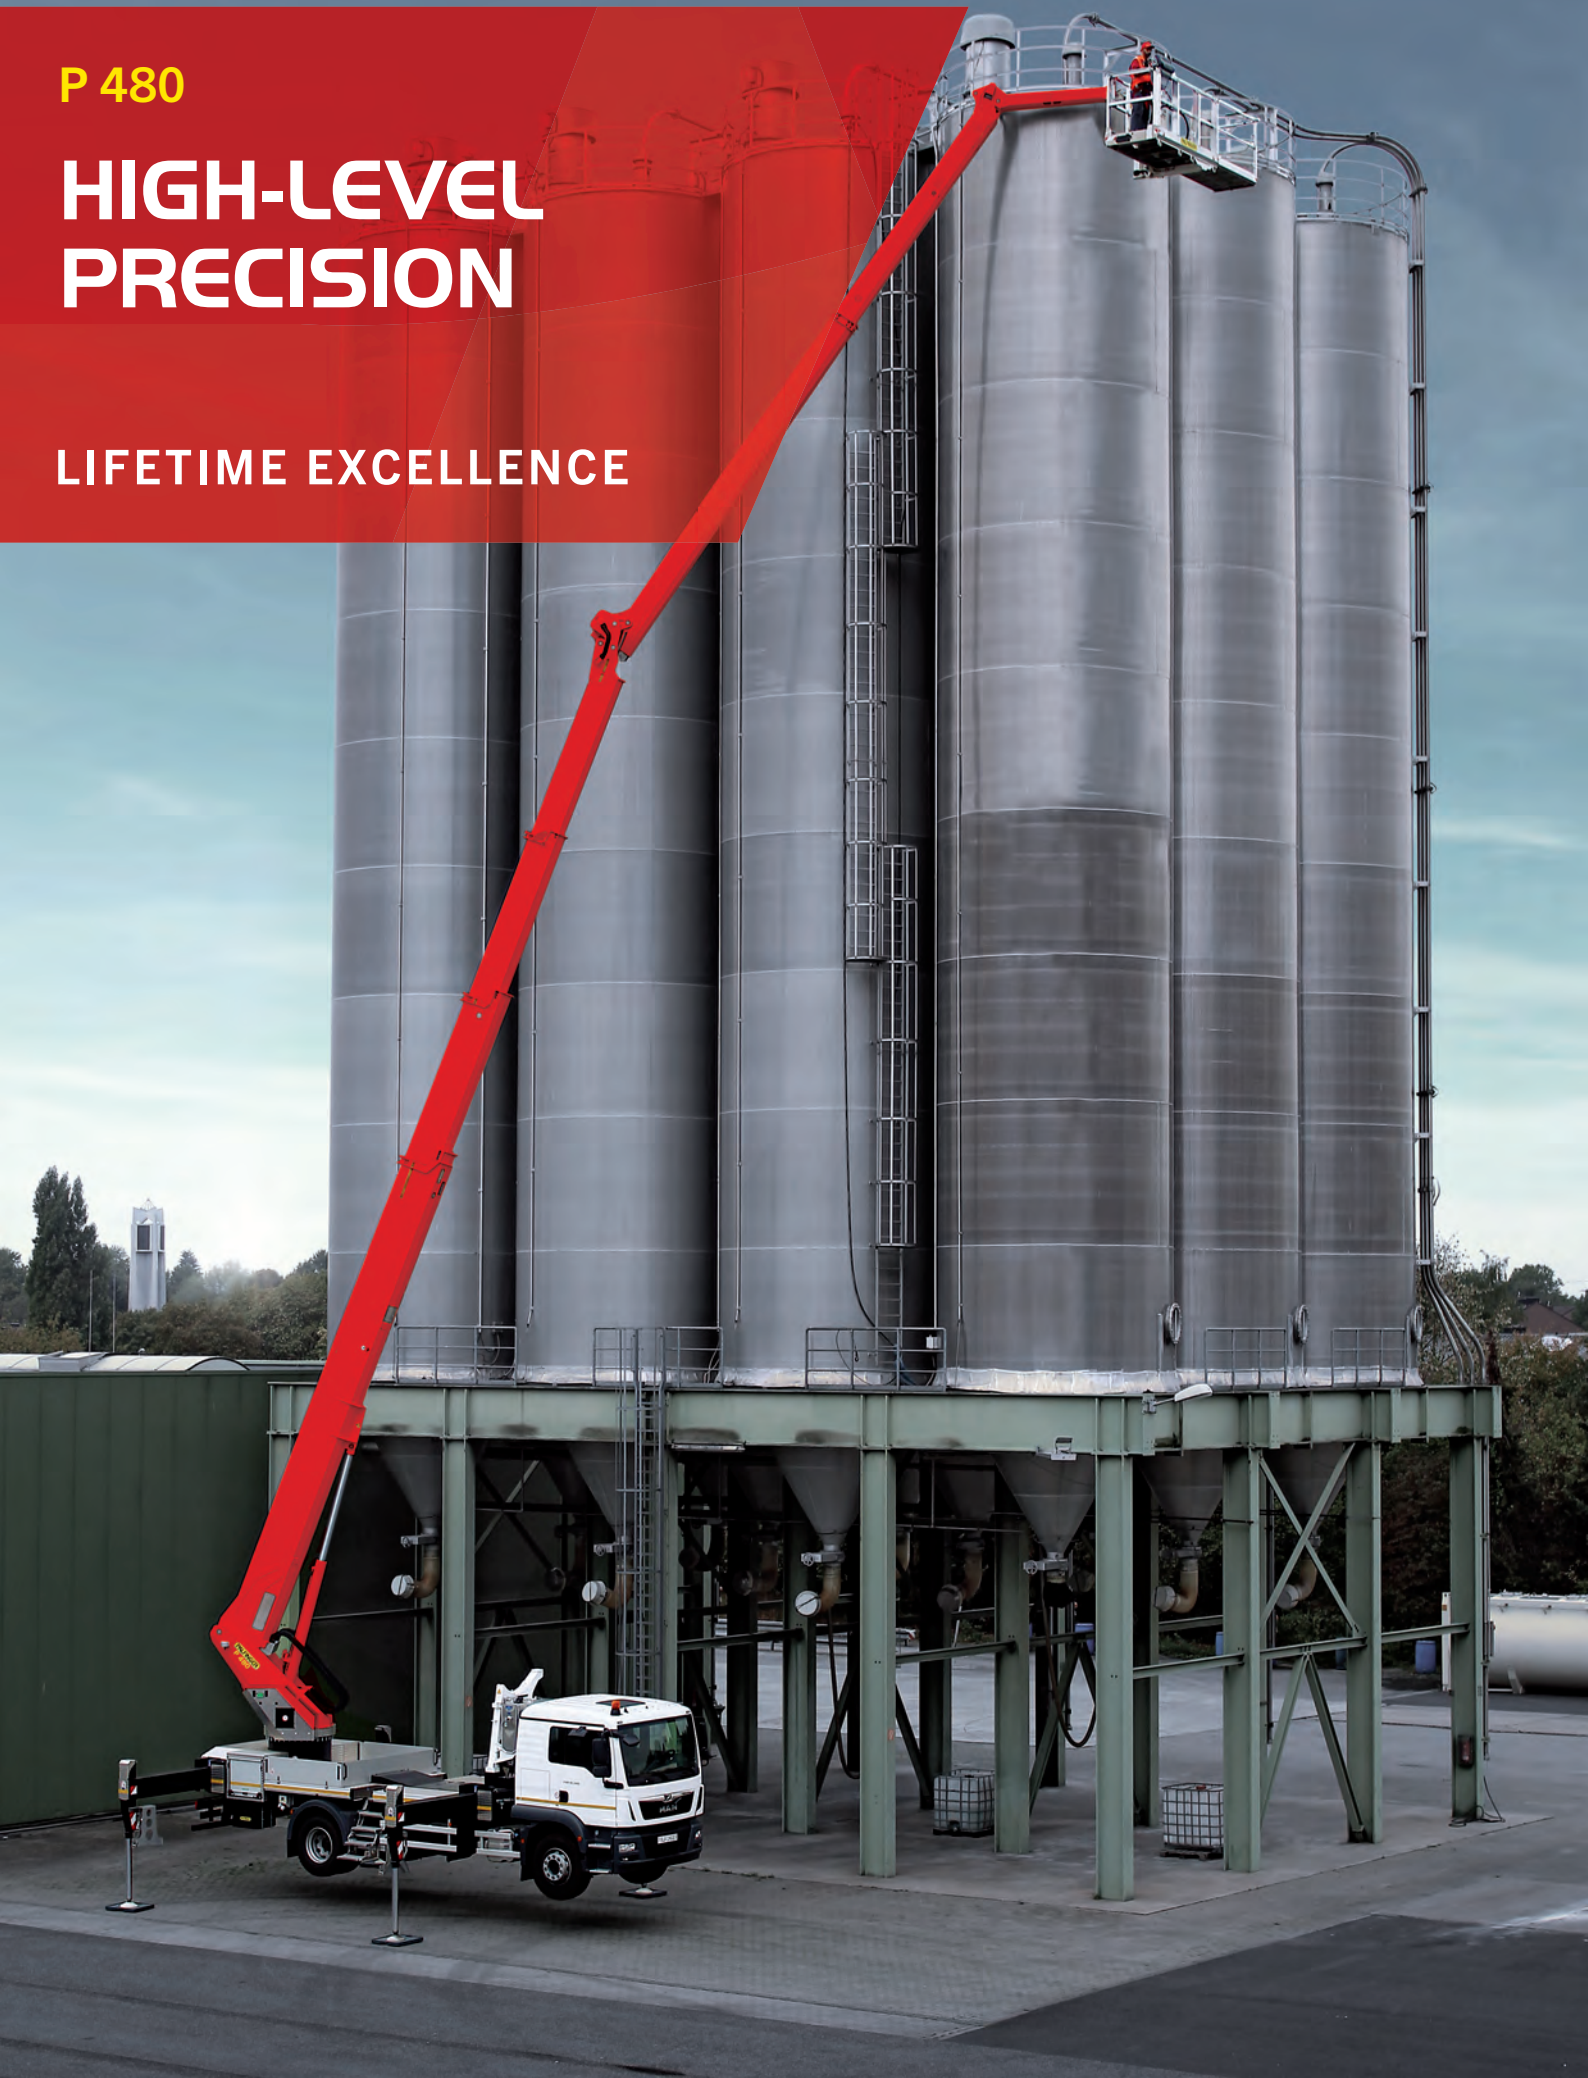

## HIGHLIGHTS

- Greater flexibility thanks to 240° X-jib
- 2 x 200° rotation for perfect positioning of the workman basket
- Telescopic upper boom up to 17 m length
- 1000 mm stabilising stroke to compensate highly uneven terrain
- Telescopic basket with 600 kg basket load and integrated mount for Powerlift system
- Hanging basket enables users to get close to objects

## STANDARDS

- Reverse camera
- Home function
- Automated positioning system
- Telescopic cage
- Safety plates
- 230 V CEE current supply with CEE socket in the workman cage
- Easy access through integrated stairs to platform
- Oil cooler to maintain the optimum operating temperature

## OPTIONS

- Barrier-free Powerlift system
- Increasing the working range using counterweights
- Mobile radio remote controls for access platform and stabiliser operation
- Vertical parallel manoeuvrability of the workman basket for easy control along buildings
- Attachable cable winch under the workman basket with 460 kg lifting capacity




## TECHNICAL SPECIFICATIONS

|                                                                                   |                             |          |                                                                                   |                             |                      |
|-----------------------------------------------------------------------------------|-----------------------------|----------|-----------------------------------------------------------------------------------|-----------------------------|----------------------|
|  | Total weight *              | 17600 kg |  | max. outreach               | 31 m                 |
|  | Overall length              | 9,92 m   |  | Rotation angle of turntable | 540°                 |
|  | Width in transportposition  | 2.51 m   |  | Rotation angle of cage      | 2 x 200°             |
|  | Height in transportposition | 3.96 m   |  | Rotation angle of cage boom | 240°                 |
|  | max. stabiliser width       | 6.30 m   |  | Size of cage                | 3.88 x 1.05 x 1.10 m |
|  | max. working height         | 48 m     |  | max. cage load              | 600 kg               |
|  | max. cage bottom height     | 46 m     |                                                                                   |                             |                      |


\* Depends on truck chassis

## WORKING DIAGRAMS

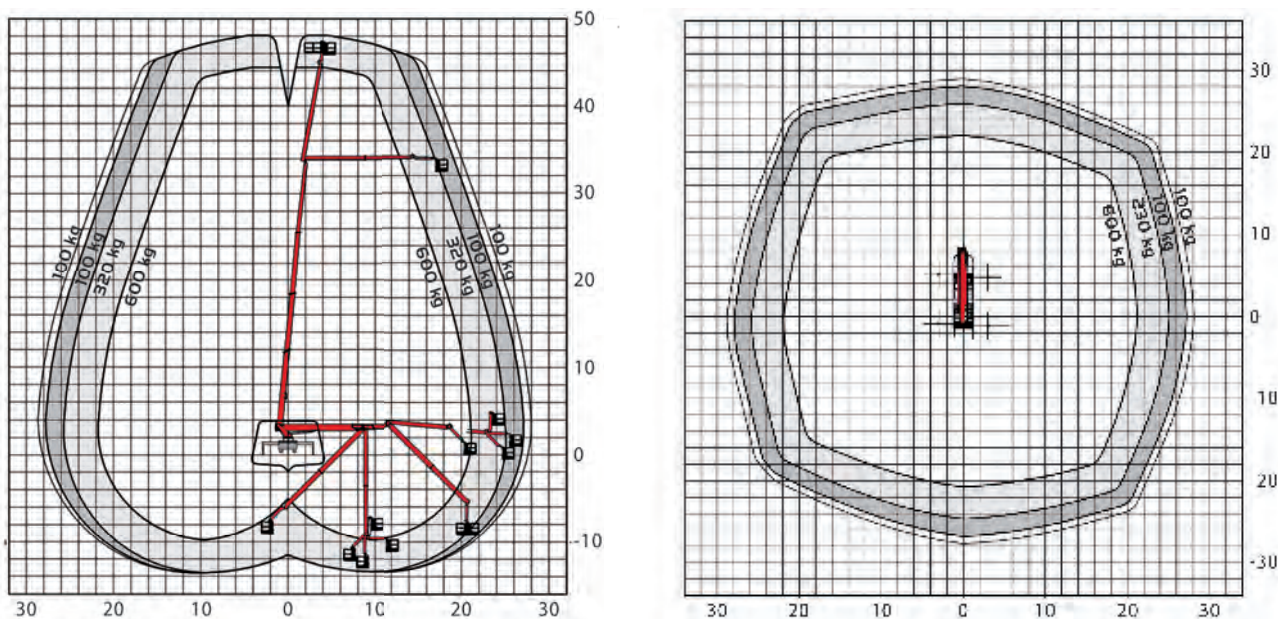

A possible 2% tolerance is contingent on structural components

## DIMENSIONS

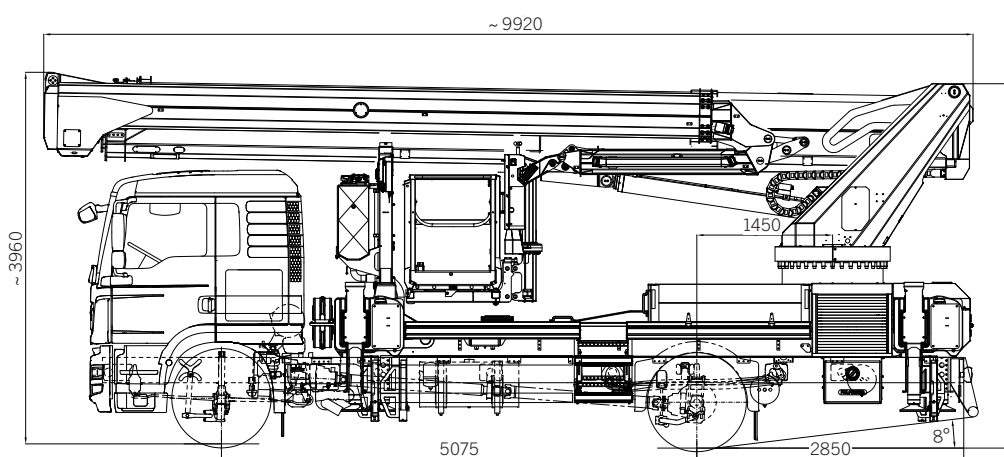

## YOUR CONTACT

**Palfinger Platforms GmbH**  
Düsseldorfer Str. 100  
47809 Krefeld | Germany

KP-P480M2+EN

Units shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.

PLATFORMS | AREA SALES MANAGER



HEAD OF SALES  
MICHAEL GRUBÖCK



LAURA GARAGNANI

Responsible Areas:  
France, Portugal, Spain, Ireland United Kingdom



CHRISTIAN BUSCH

Responsible Areas:  
Switzerland, Slovakia, Hungary, Romania, Bulgaria, Australia, New Zealand, Georgia



TIMO LENZEN

Responsible Areas:  
Norway, Sweden, Finland, Island, Denmark, Faroe Islands, Latvia, Lithuania, Estonia, Czech Republic, Poland, Ukraine, Moldova



SARAH SCHIER

Responsible Areas:  
Netherlands, Belgium, Luxembourg



NICOLAS HARTER

Responsible Areas:  
Slovenia, Croatia, Greece, Cyprus, Serbija, Bosnia, Kosovo, Montenegro, Albania, Macedonia, Israel, Turkey, Georgia, Syria, Lebanon, Jordan, Iraq, Iran, Afghanistan, Saudi Arabia, Kuwait, Bahrain, Qatar, UAE, Oman, Yemen



N.N.

Responsible Areas:  
Africa




JOHANN POSCHNER

Responsible Areas:  
Germany, Austria



ALFREDO CAREDDU

Responsible Areas:  
Italy, Malta

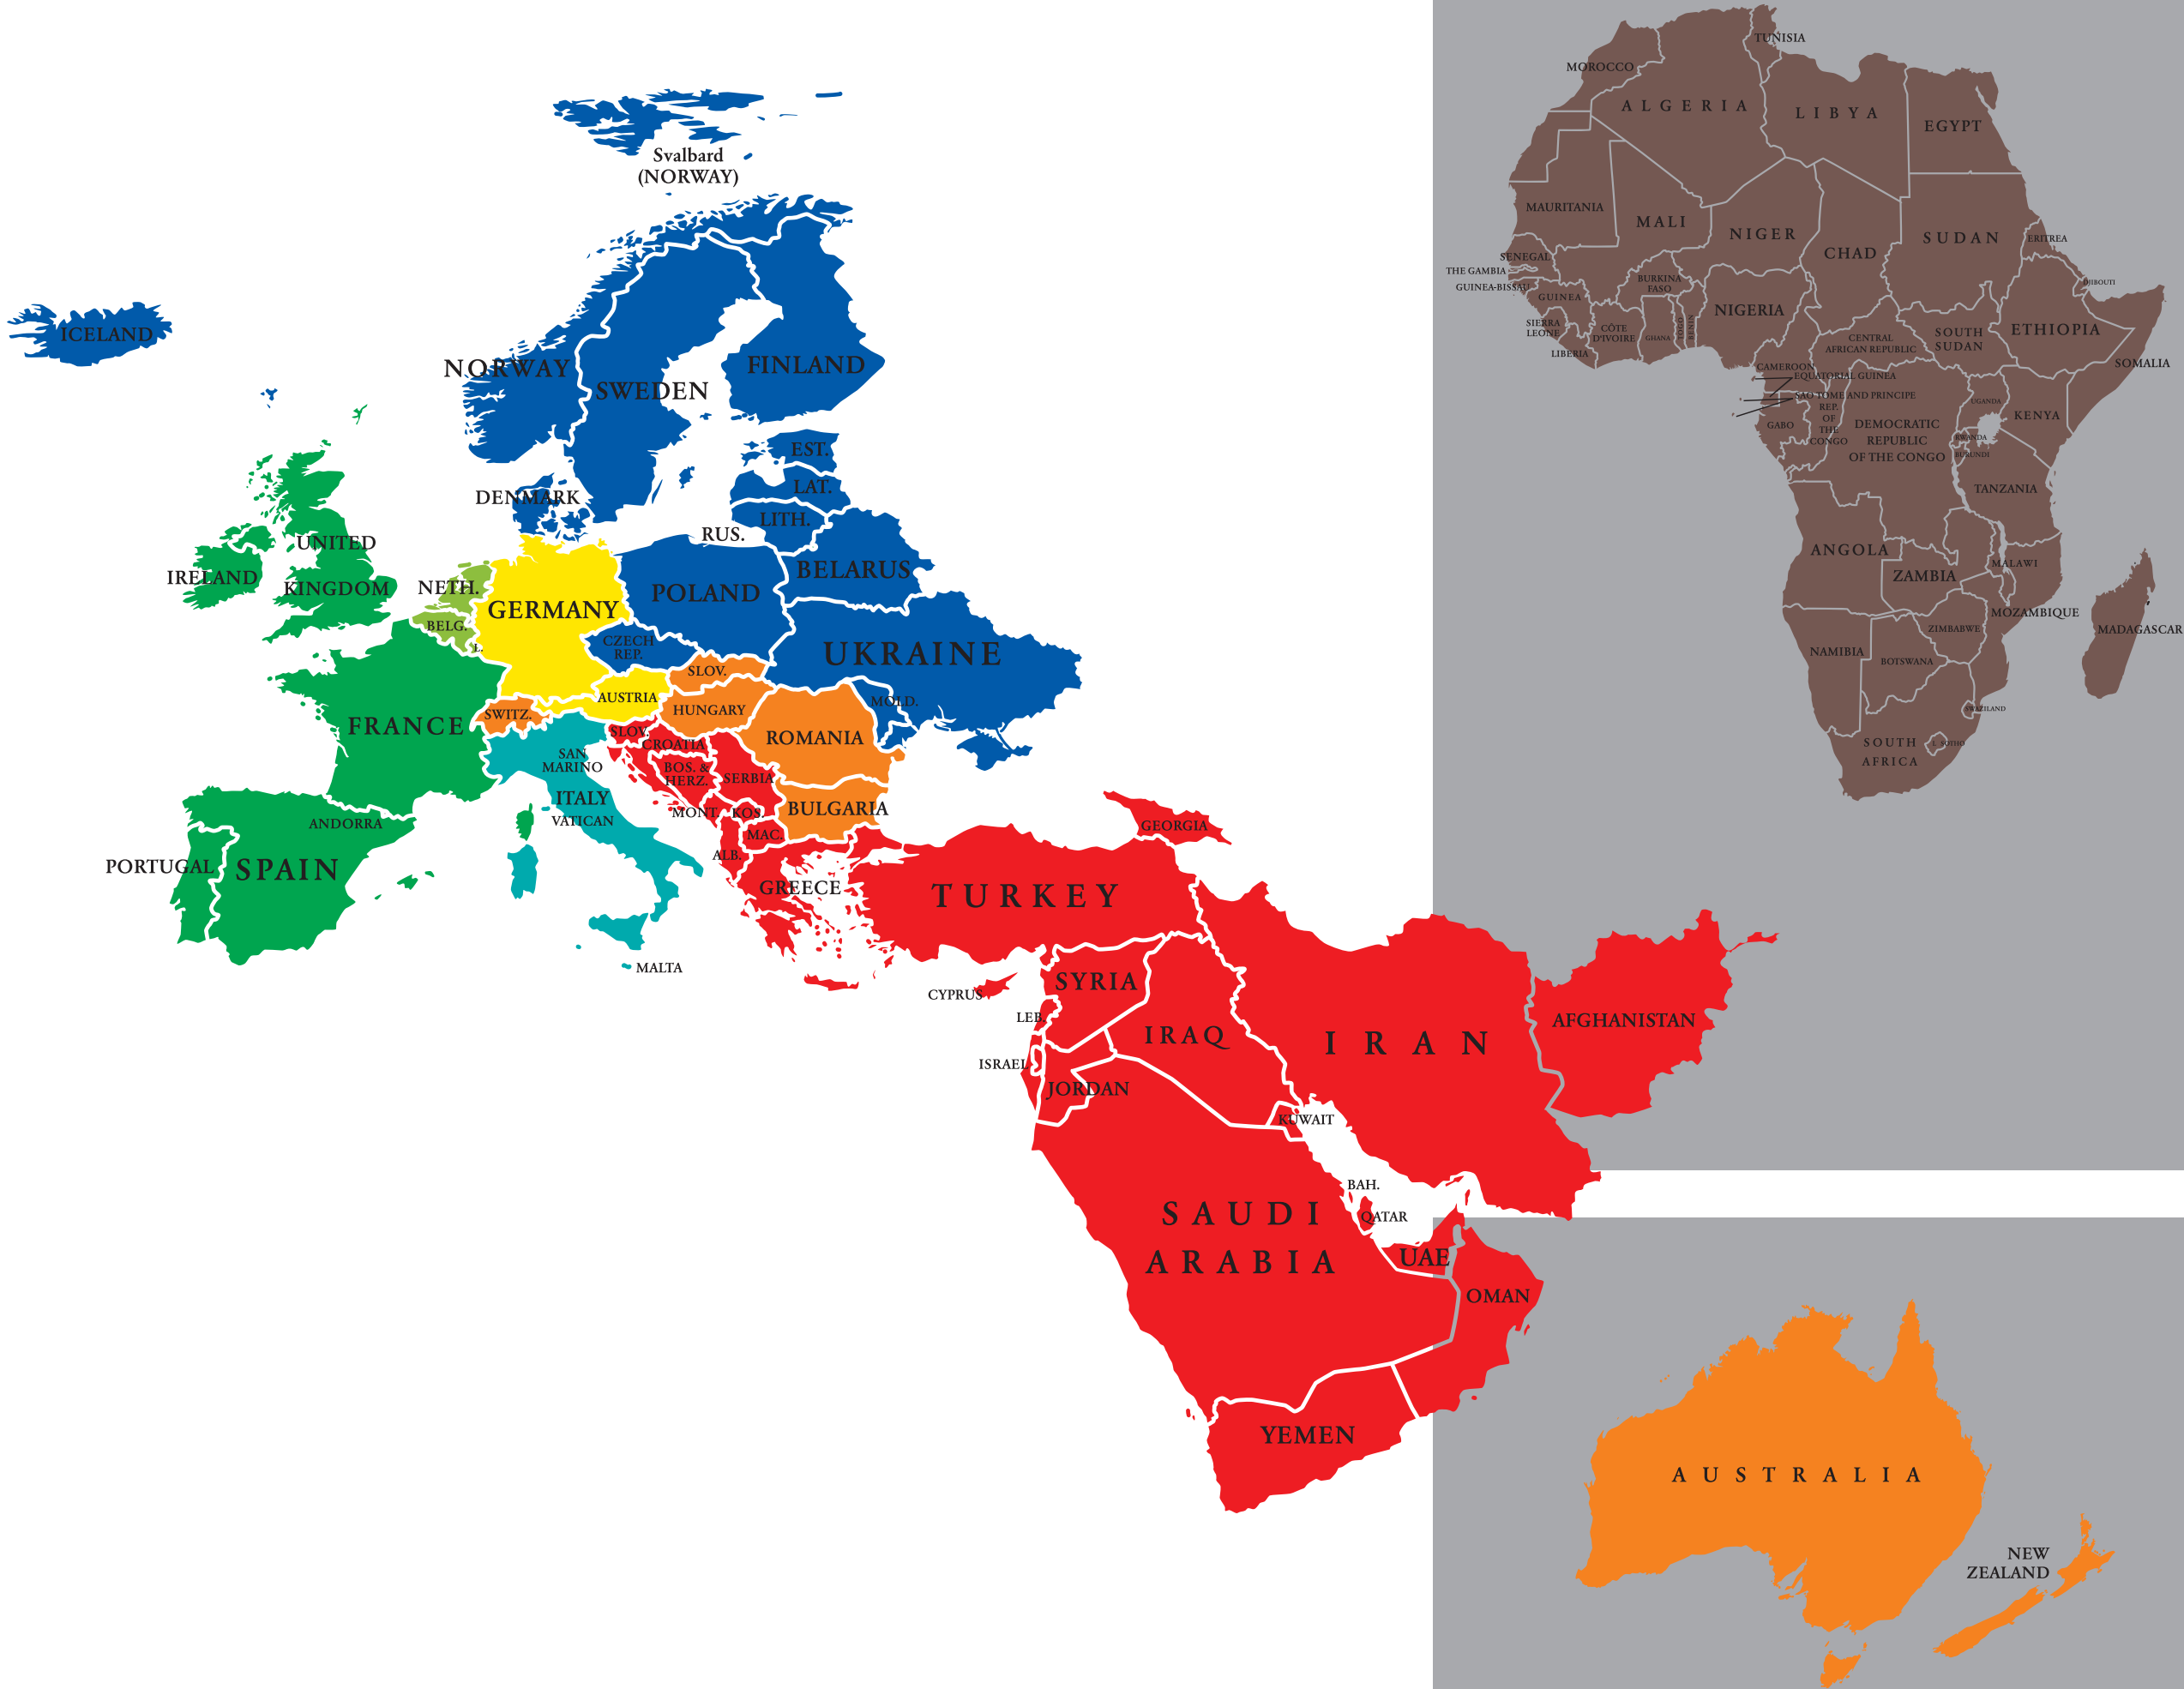

PALFINGER PLATFORMS GMBH | Düsseldorf Str. 100 | 47809 Krefeld | Germany

Palfinger GmbH  
Feldkirchener Feld 1  
83404 Ainring | Germany

To whom it may concern

Krefeld, 25.11.2020

Dear Sir or Madam,

## YOUR ENQUIRY FOR A PALFINGER ACCESS PLATFORM

Thank you very much for your enquiry and your interest in our products and services. We are pleased to support you during the evaluation process to find the right access equipment for safe operations in heights. Based on the information we received we are glad to provide you with a non-binding quotation for:

### **PALFINGER Access Platform P 480 mounted on MAN TGM 18.290 4x4**

PALFINGER stands for the most innovative lifting solutions at the highest technological level. With PALFINGER Access Platforms you invest in safe and reliable height access technology that is of outstanding quality.

PALFINGER is the only manufacturer in the world offering both non-insulated and insulated access platforms reaching working heights from 10m to 103m for chassis weights between 3.5t and 60t GVW. PALFINGER Access Platforms are thus optimally adjusted to the relevant working range.

We always strive to provide the best service and support to our customers. So in case of questions or remarks please do not hesitate to contact us. However, we are convinced that our quotation will meet your expectations and take the liberty of contacting you in this regard.

Yours sincerely,

**PALFINGER PLATFORMS GMBH**

Michael Gruböck  
Sales & Service Manager EMEA

i.A.  
Adnan Isso  
Area Sales Manager

Quotation for

# **PALFINGER P 480**

mounted on **MAN TGM 18.290 4x4**



Picture shows additional equipment. For reference only.

No.: ADI20201125002-1

Date: 25.11.2020

**Quotation for:**  
To whom it may concern

**Your contact:**  
Inside Sales EMEA  
**T** +49 2151 4792 - 0  
**F** +49 2151 4792 - 130  
**M**  
[sales.platforms@palfinger.com](mailto:sales.platforms@palfinger.com)

**PALFINGER PLATFORMS GMBH**  
Düsseldorfer Str. 100  
47809 Krefeld | Germany

# CONTENT

|                                                   |   |
|---------------------------------------------------|---|
| Price Overview                                    | 4 |
| Your Scope of Supply                              | 4 |
| Our Recommended Additional Equipment and Services | 6 |
| Terms and Conditions                              | 7 |
| Your Required Basic Specification                 | 8 |

# PRICE OVERVIEW

## YOUR SCOPE OF SUPPLY

| Item     | Qty | Description                                | Price (EUR) |
|----------|-----|--------------------------------------------|-------------|
| P 480    | 1   | PALFINGER Access Platform P 480            |             |
| DDK00101 | 1   | Operating instructions, stickers German    |             |
| ASC00110 | 1   | Secondary control at the turntable         |             |
| ASC00111 | 1   | Remote control for access platform         |             |
| AWZ01001 | 1   | Crane winch                                |             |
| EKM01003 | 1   | Intercom betw. sec. Oper Attach. and cage  |             |
| ELB00112 | 1   | 4 working lights at basic frame            |             |
| ELB00113 | 1   | 2 LED working lights on boom rest          |             |
| ELW00123 | 1   | Flashing light; fixed left on turntable    |             |
| ELW00124 | 1   | Flashing light; fixed right on turntab.    |             |
| ELW05002 | 1   | Flash light (LED) under the cage           |             |
| ESS00404 | 1   | Cage collision prevention                  |             |
| FAT00111 | 1   | Modifications at truck chassis / 11        |             |
| FUF00101 | 1   | Supply and mounting of underrun            |             |
| KAV00105 | 1   | Cage-App - Seat in cage                    |             |
| KAV00106 | 1   | Cage-App / USB connection in cage          |             |
| KAV00204 | 1   | Powerlift-System                           |             |
| KLL00102 | 1   | High pressure air line cage/base           |             |
| SSG00108 | 1   | Anemometer Cover                           |             |
| VVK00102 | 1   | 24 month warranty                          |             |
| KOST13   | 1   | additional stickers and side marker lights |             |
|          |     |                                            |             |
|          |     |                                            |             |
|          |     |                                            |             |
|          |     |                                            |             |
|          |     |                                            |             |
|          |     |                                            |             |

*to be continued on the next page*

# TERMS AND CONDITIONS

**Terms of delivery**

Ex works (EXW) according to Incoterms® 2010, Krefeld. All prices are net prices with VAT excluded.

**Validity of pricing**

The terms and conditions for the single line items are valid until 25.12.2020. The quotation, however, is non-binding.

**Terms of payment**

Within 30 days net.

**Delivery time**

On Stock Unit

**Terms and conditions of business**

According to our General Terms and Conditions of Business which can be found at <https://www.palfinger.com/en-gb/terms-conditions>. Of course we will be pleased to provide you with the required document upon request.

We reserve the right to make technical alterations without prior notice. Illustrations may differ.

Please take your time to carefully check this quotation. Furthermore, please check if the described machine meets the registration requirements in your country as we cannot assume any liability for local restrictions that may apply.

# YOUR REQUIRED BASIC SPECIFICATION

|          |                                                                                                                                                                                                                                                                                                                                    |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| P 480    | PALFINGER Access Platform P 480 as per technical description                                                                                                                                                                                                                                                                       |
| DDK00101 | Operating instructions, stickers, labels and display messages (if display available) in German language                                                                                                                                                                                                                            |
| ASC00110 | Secondary control at the turntable with seat, graphic display and foot pedal                                                                                                                                                                                                                                                       |
| ASC00111 | Remote control system for access platform                                                                                                                                                                                                                                                                                          |
|          | Not for stabilizers!                                                                                                                                                                                                                                                                                                               |
| AWZ01001 | Cable winch pluggable under the cage. Placing of the winch on the aluminium cover panel with automatic uptake and plug function. Hoist power of the cable winch app. 460 kg. Rope length app. 50 m. Declaration of conformity according to DIN EN 13001 (operating of the platform is not possible while cable winch is installed) |
| EKM01003 | Intercom system between secondary operation attachment and cage                                                                                                                                                                                                                                                                    |
| ELB00112 | 4 working lights mounted at the basic frame to illuminate the outrigger areas; switch at the outrigger control/truck chassis cabin                                                                                                                                                                                                 |
| ELB00113 | Illumination of surrounding area via 2 LED working lights 12/24 VDC, mounted at the left and right side of the boom rest.<br>Activation via Display in drivers cab.                                                                                                                                                                |
| ELW00123 | Flashing light; yellow; fixed; on the left side at the turntable; Type Comet-B LED                                                                                                                                                                                                                                                 |
| ELW00124 | Flashing light; yellow; fixed; on the right side at the turntable; Type Comet-B LED                                                                                                                                                                                                                                                |
| ELW05002 | Flash light (LED) under the cage (activ when platform is not in transport position)                                                                                                                                                                                                                                                |
| ESS00404 | Cage collision prevention system; ultrasonic sensor mounted under the cage acting downwards. Software is parameterised; cage stops approx. 4 m above ground                                                                                                                                                                        |
| FAT00111 | Modifications at truck chassis / 11                                                                                                                                                                                                                                                                                                |
| FUF00101 | Supply and mounting of lateral underrun protection (if not delivered with the chassis)                                                                                                                                                                                                                                             |
| KAV00105 | Cage-App - Seat in cage                                                                                                                                                                                                                                                                                                            |
| KAV00106 | Cage-App / USB connection in cage                                                                                                                                                                                                                                                                                                  |
| KAV00204 | Powerlift-System, consisting 4 load cross beams and 2 extendable booms                                                                                                                                                                                                                                                             |
| KLL00102 | High pressure air line with connection inside the cage (coupling socket) and at the basic frame (coupling plug)                                                                                                                                                                                                                    |
| SSG00108 | Anemometer Cover                                                                                                                                                                                                                                                                                                                   |
| VVK00102 | 24 month warranty according to the export service agreement.                                                                                                                                                                                                                                                                       |

KOST13

- 1) Sticker max. speed 80 and max. speed 70 mounted on the left and right side of the rear (
- 2) side marker lights mounted at the underrun protection

MXLKW-MAN

MAN TGM 18.290 4x4 , wheelbase 4800, C-Cab cab, Euro 6d