

ETT 29 SNT Aerial Lift Truck Ford 2024 F-550

4x4



FORD

## ETT 29 SNT AERIAL LIFT TRUCK

2024 F-550 4X4

STOCK NUMBER: 24833


NEW

AVAILABLE



### OFFER INFORMATION

Location details

4000 King Air Drive , Bryan, TX, 77808 - United States 

Dealer Name

Infrastructure Equipment Group



Availability

Available

Product type

New

Stock number

24833

Contact person

Jordan Tuttle

Dealer E-mail

[jtuttle@ieg.com](mailto:jtuttle@ieg.com)

Dealer phone

+1-979-999-9000

\$ 169,900



4x4

---

**AERIAL UNIT DETAILS**

- 2024 Palfinger ETT-29-SNT
- Fiber Splicing Package
- 34 ft Working Height
- 22 ft Side Reach
- Side Door Bucket Entry
- Electrical Outlet at Upper Controls
- 300 lb Bucket Capacity

**BODY DETAILS**

- Street Side Tool Boxes
- Onan Generator
- Climate Controlled Splicing Area

**CHASSIS DETAILS**

- 2024 Ford F-550
- 4x4
- Diesel

# ETT 29N-T

## TRUCK MOUNTED TELESCOPIC

DEPEND ON IT.™




### POWERFUL OPTION

The ETT model series provides customers a multitude of options with an aerial that has a working height of 34 feet. The ETT29 N-T is a telescopic aerial mounted on a truck designed for the ease of use with access to powerful options. Standard features include a gear box that has an extended shaft for manual rotation, adjustable wear pads, upper controls at the platform and lower controls accessible from the ground. Optional equipment can be added to tailor the unit to the customer needs and may include hydraulic platform leveling, electric tool circuit, oversize bucket, pedestal riser and many more. This model is a solution provider to customers that need reach and height to accomplish a job.





## ETT 29N-T

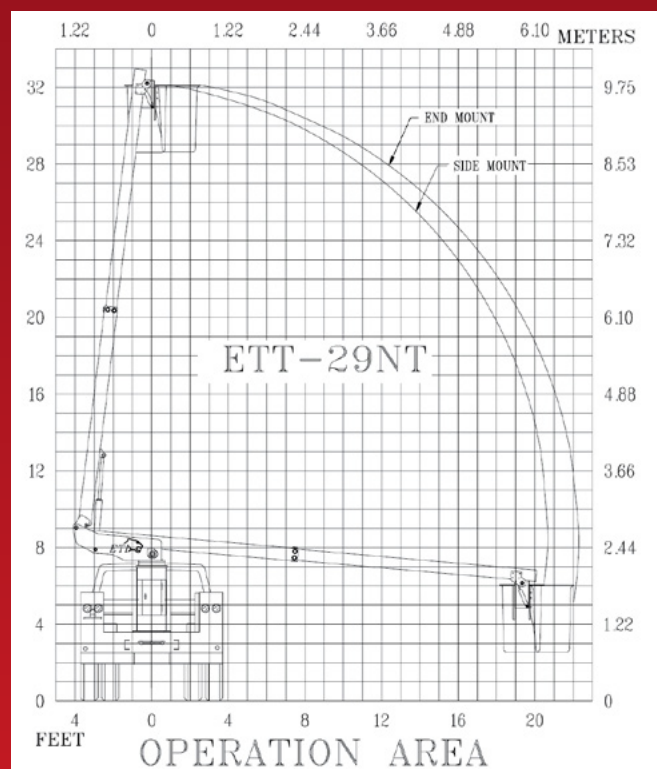

**EQUIPMENT TECHNOLOGY LLC  
IS A FULL SERVICE SOLUTION  
PROVIDER OF THE HIGHEST  
QUALITY DESIGN,  
MANUFACTURING, AND POST  
SALE SERVICE.**

### EQUIPMENT TECHNOLOGY LLC

341 NW 122nd  
Oklahoma City, OK 73114  
Toll-Free: 1-888-748-3841 • Fax: 1-405-755-6829  
[etiequipment.com](http://etiequipment.com)

## GENERAL SPECIFICATIONS\*

	ETT 29N-T Side mount (std)	ETT 29N-T End mount
Height to bottom of bucket .....	28 ft. - 7 in.	29 ft. - 0 in.
Working height .....	33 ft. - 7 in.	34 ft. - 0 in.
Side reach .....	20 ft. - 9 in.	22 ft. - 9 in.
Stow height* .....	9 ft. - 6 in.	9 ft. - 6 in.
Rated bucket capacity .....	350 lbs.	350 lbs.

## HYDRAULIC SYSTEM

	ETT 29N-T	ETT 29N-T
OPERATING PRESSURE (MIN) .....	2,000 PSI.	2,000 PSI.
OPERATING VOLUME .....	2.5 GPM	2.5 GPM

## MINIMUM VEHICLE SPECIFICATIONS

- GVWR (with dual rear wheels) ..... 11,000 lbs.
- GAWR (front) ..... 4,100 lbs.
- GAWR (rear) ..... 8,250 lbs.
- C.A. .... 60 in.

## STANDARD FEATURES

- Shear ball rotation gear driven by internal gear box.
- The gear box has an extended shaft for manual rotation.
- All pins turn on replaceable bushings.
- Inner boom is actuated by a hydraulic cylinder extension system.
- Adjustable wear pads.
- Internally mounted holding valves (integral part of cylinder) lock cylinders in place in event of hydraulic failure.
- Upper controls at platform provided by 12 volt DC system.
- Upper controls recessed in fiberglass control panel.
- Lower controls accessible from the ground.

## OPTIONS

- Hydraulic platform leveling
- Emergency hydraulic power system
- Start/stop system
- Two speed throttle system
- Bucket cover
- Air line to bucket
- Electric tool circuit
- Oversize bucket (24" x 30" x 42")
- Splicer bucket
- End mount bucket
- Pedestal Riser

## HYDRAULIC POWER OPTIONS

- Fan belt pump
- PTO/pump
- Engine generator
- DC Power

Specifications are subject to change without notice  
Note (\*): All specifications are based on 40" frame height