

SCANIA


PK 580 TEC

R 500 B8X2/*6NB

CONTRACT NUMBER: PALDRIVE 613

NEW

IN PRODUCTION

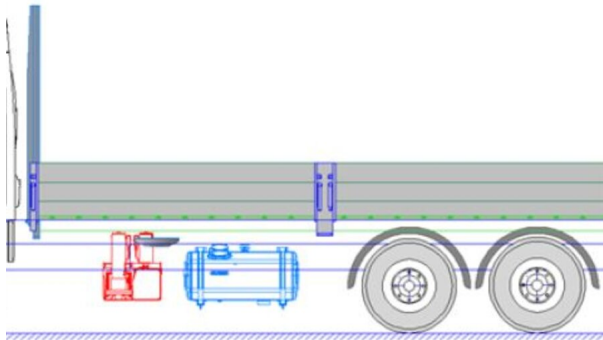

SPECIFICATION



PK 580 TEC

lifting moment	55,5 mt
lifting capacity	390 kg/ 31,4 m
Max. outreach incl. fly-jib	31,4 m
swivel range	endless



MCC-INSTALLATION

Flatbed

Platform length	6300 mm
Platform width	2480 mm
Frontwall height	2400 mm
Side- and rearwall height	400 mm
loading height	1240 mm

OFFER INFORMATION

Location details

Lengau, 5211 - Austria 

Dealer Name

Palfinger EMEA GmbH AT

PALFINGER

Product type

New

Contract number

Paldrive 613

Dealer E-mail

sales@palfinger.com

Dealer phone

004366488345792



SCANIA R 500 B8X2/*6NB

engine power 500 HP

wheelbase 4800/ 1350/ 1350 mm

cabin CR20N

gearbox G33CM incl. Opticruise

PRODUCT

Manufacturer	Palfinger	Outreach / Lifting power	31,4 m/ 390 kg
Model	PK 580 TEC + PJ 150	Max outreach	31,4 m
Lifting moment	55,5 mt		

TRUCK

Truck manufacturer	Scania	Gross vehicle weight	32.000 kg
Drivers cabine	CR20N	Dead weight	23.600 kg
Wheel base	4800 + 1350 +1350 mm	Payload	8.400 kg
Power	500 PS	Payload category	6t - 15t
Emmission standard	EURO 6e	Construction	Crane and platform
Axes	8x2		

PK580 TEC

HYDRAULIC & TECHNICS

- Hydraulic 7-fold extension
- High-speed extension system with return oil recovery
- Endless swivel range
- Hydraulic support leg extension (max.support width 7800 mm)
- Additional hydraulic support (max.support width 7100 mm)
- Support legs can be swiveled hydraulically through 180 °

ASSISTANCE SYSTEMS

- Paltronic 180
- HPSC Plus LOAD
- BRA Boom Release Assistant/ 3-3-3 cross levers
- Scanreco P6 radio remote control

EQUIPMENT

- incl. fly-jib PJ150E
- working lights on the articulated arm and on the fly-jib
- Hose equipment for two additional devices + quick coupling (Multifaster)
- 3.5t cable winch on the main arm (hydraulically foldable), Cable length: 90m
- Automatic rope tensioning device (RTC) and rope winch synchronous control (SRC)
- 11.5to and 18to load hooks
- colour RAL3020

SCANIA R 500 B8X2/*6NB

SPECIFICATIONS

- 500 HP, max. 2,650 Nm

PJ150-E (ADDITIONAL KNUCKLE ARM)

- Hydraulic 6-fold extension
- Can be folded upwards by 25 ° hydraulically
- Applications with additional devices possible (e.g. gripper, rotator ...) + quick coupling (multifaster)

- Gearbox G33CM incl. Opticruise
- suspension front/ rear: air/ air
- Fuel tank 200l / AD-Blue 105l
- Tires 1st, 2nd, 4th axle 385/55R22,5
- Tyres driven axle 315/70R22.5
- Cabin color: Ebony Black / chassis color: Sub Grey
- Ringfeder towbar type 40 G 150A

SERVICE CRANE TECHNICAL DETAILS

